

# BKT

GROWING TOGETHER

# TRACTOR & HARVESTER

RADIAL AGRICULTURAL TIRES





# TRACTOR HARVESTERS

## RADIAL AGRICULTURAL TIRES

Have you got a small lot of land or wide fields stretching over several hectares? BKT has the perfect tire that suits your needs. BKT has had a focus on research and development of tires for tractors and harvesters ever since creating specialist product ranges for any specific need.

As these types of agricultural machinery are essential for every farming business, do not ignore the key role of tires! It is important to choose products that care for the most delicate soils ensuring at the same time high load capacity as well as operators' comfort without forgetting reduced operating costs. All this even under extreme conditions. Find out which BKT product is perfect to fit your needs!



# TOR & RVESTER



## Radial

Radial tires have steel cords that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.














## Bias

Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance and puncture resistance.

# TRACTOR TIRES

## RADIAL AGRICULTURAL TIRES

### TECHNOLOGIES



# TOR & HARVESTERS



## PERFORMANCE



Comfort



Cut and Chip  
Resistance



Durability



Field Protection



For muddy ground



Fuel Economy



Handling and Comfort



Heavy Duty



High Load Capacity



High Puncture  
Resistance



Ice and Snow



Ideal for grassland



Low Rolling  
Resistance



On/Off Road



Reduced Soil  
Compaction



Road Oriented



Self-Cleaning



Stability



Steering Control



Traction

# TRACTOR & HARVESTER RADIAL TIRES



**AGRIMAX FACTOR**



[ p. 10 ]



**AGRIMAX V-FLECTO**



[ p. 12 ]



**AGRIMAX SPARGO**



[ p. 18 ]



**AGRIMAX SPARGO SB**



[ p. 20 ]



**AGRIMAX PROCROP**



[ p. 22 ]



**AGRIMAX PROHARVEST**



[ p. 23 ]



**AGRIMAX FORCE**



[ p. 24 ]



**RIDEMAX FROST**



[ p. 27 ]



**AGRIMAX SIRIO**



[ p. 28 ]



**AGRIMAX FORTIS**



[ p. 29 ]



**AGRIMAX RT 657**



[ p. 30 ]



**AGRIMAX RT 765**



[ p. 33 ]



**AGRIMAX RT 855**



[ p. 39 ]



**AGRIMAX RT 945**



[ p. 46 ]



**AGRIMAX ELOS**



[ p. 47 ]



**AGRIMAX RT 955**



[ p. 48 ]



**AGRIMAX TURF RT 333**



[ p. 50 ]



**RT 851**



[ p. 52 ]



**RT 853**



[ p. 53 ]



**RT 857**



[ p. 54 ]



**RIDEMAX IT 696**



[ p. 55 ]



**RIDEMAX IT 697 (M+S)**



[ p. 57 ]



**AGRIMAX RT 600**



[ p. 58 ]



**TRAC SUPER**



[ p. 59 ]



**AGRIMAX TERIS**



[ p. 60 ]



**FL 635**



[ p. 62 ]



**RM 500**



[ p. 63 ]

# Soil-improving technology

IF/VF solutions widen your tire's contact area on the ground reducing soil compaction. This technology results in enhanced traction, less slippage, increased soil productivity, and reduced fuel consumption leading to overall increased yields.

IF AND VF TIRES FEATURE **MAJOR SIDEWALL FLEXIBILITY** COMPARED TO STANDARD RADIAL TIRES.



Improved Flexion Tire


**+20%**  
LOAD



Very High Flexion Tire

**+40%**  
LOAD

at equal inflation pressure, same conditions.

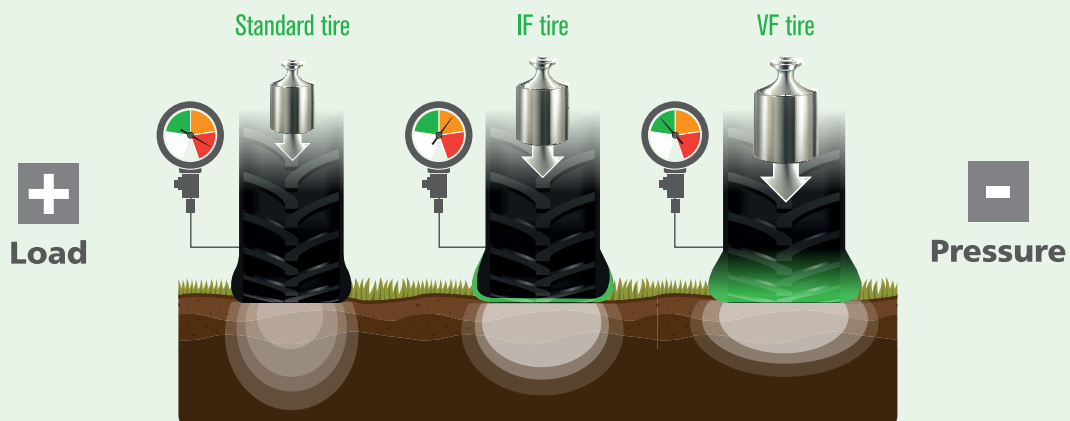



## Reduced soil compaction

Thanks to the optimized contact area on the ground, a wider profile, and thanks to reduced inflation pressure, IF and VF tires significantly minimize soil compaction, which is the reason for 20% of harvest losses. As a result, the yield per hectare increases preserving both the soil's integrity and properties.



## Less operating costs

Designed for ensuring an extended product life-cycle and an optimum return on investment, both IF and VF tires have been built for a by-at-least-10%- increased durability compared to their standard equivalent. Even under operating conditions at low pressure, these tires show off their strength and resistance over the time as well as for road usage.



## Optimized operating hours

IF and VF tires' tread design enhances road efficiency by reducing transport cycles and maximizing field operations thanks to excellent traction that increases the yield per hectare. In addition, without any need for changing inflation pressure, IF and VF tires provide actual time savings.



## More load capacity

Against the backdrop of always heavier machinery and loads and a consequently increased risk of soil compaction and crop damages, tires play an essential role. Both IF and VF tires perfectly meet the need of maximizing load capacity without modifying inflation pressure regardless of speed.



## Maximum performance

IF and VF tires haven been designed and built with a strong and likewise flexible casing to withstand any kind of stress even under the most severe operating conditions. Ensuring a safe, stable and effortless drive is indeed a challenge that BKT faces every day at their Research and Development Center.



## Ensured comfort

IF and VF tires contribute to reduce operators' fatigue and to ensure them an enjoyable driving experience both in the fields and during road transfers by significantly reduced vibrations and noise. The special casing enables the tire to rapidly recover its correct shape even after long periods of inactivity.





Radial

R-1W

D

179



# AGRIMAXFACTOR

AGRIMAXFACTOR is BKT's brand-new 70 series for tractors that is perfect for both haulage and soil tillage operations. The improved tread design with further increased lug length and changed lug orientation stands for better roadability. The reduced lug angle ensures less rolling resistance, whilst the by 5 % increased contact area on the land significantly reduced the noise perception in the cabin – both features stand for more comfort. In addition, the strong polyester casing provides extraordinary lateral stability and a faster steering response even for high-speed operations or heavy-duty service. The tire's braking results on wet surface are excellent. In a nutshell, AGRIMAXFACTOR's overall advantages are great handling in combination with under many aspects extraordinary driving comfort in addition to excellent durability – all particular requirements by increasingly heavier machinery including the higher weight of e-vehicles' battery packages. The exclusive sidewall logo that highlights BKT's commitment to electric mobility.

### Technologies



E-ready



High Speed



Heavy Duty

### Performance



Durability



Stability



Steering Control



Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 24"	360/70 R 24	122 D/ 125 A8	W 11	W 10 ; W 12	357	1140	522	3386	550	STD
	380/70 R 24	125 D/ 128 A8	W 12	W 11 ; W 13	380	1190	538	3524	575	STD
	420/70 R 24	130 D/ 133 A8	W 13	W 12 ; W 14 L	418	1248	550	3649	600	STD
	420/70 R 24	134 D/ 137 A8	W 13	W 12 ; W 14 L	418	1248	563	3696	600	STD
	480/70 R 24	138 D/ 141 A8	W 15 L	W 14 L ; W 16 L	485	1311	590	3895	625	STD
Ø 28"	360/70 R 28	125 D/ 128 A8	W 11	W 10 ; W 12	357	1255	577	3747	600	STD
	380/70 R 28	127 D/ 130 A8	W 12	W 11 ; W 13	380	1293	588	3836	625	STD
	420/70 R 28	133 D/ 136 A8	W 13	W 12 ; W 14 L	418	1349	606	4000	650	STD
	480/70 R 28	140 D/ 143 A8	W 15 L	W 14 L ; W 16 L	479	1421	639	4239	675	STD
	600/70 R 28	157 D/ 160 A8	DW 20 B	DW 18 L ; W 18 L	611	1551	714	4667	725	STD
Ø 30"	420/70 R 30	134 D/ 137 A8	W 13	W 12 ; W 14 L	428	1391	633	4152	675	STD
	480/70 R 30	141 D/ 144 A8	W 15 L	W 14 L ; W 16 L	479	1478	670	4391	700	STD
	600/70 R 30	152 D/ 155 A8	DW 20 B	DW 18 L ; W 18 L	611	1602	722	4765	750	STD
Ø 34"	480/70 R 34	149 D/ 152 A8	W 15 L	W 14 L ; W 16 L	479	1580	723	4748	750	STD
	480/70 R 34	155 D/ 158 A8	W 15 L	W 14 L ; W 16 L	479	1580	729	4761	750	STD

STD: Standard





	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 38"	480/70 R 38	145 D/ 148 A8	W 15 L	W 14 L ; W 16 L	479	1681	758	5000	800	STD
	520/70 R 38	150 D/ 153 A8	W 16 L	W 15 L ; W 18 L	516	1749	795	5239	825	STD
	580/70 R 38	155 D/ 158 A8	W 18 L	DW 18 L ; DD 18 L	577	1827	823	5456	875	STD
	620/70 R 38	170 D/ 173 A8	DW 20 B	DW 18 L ; W 18 L	625	1833	844	5580	875	STD
	710/70 R 38	166 D/ 169 A8	DW 23 B	-	716	1959	866	5800	925	STD
	710/70 R 38	171 D/ 174 A8	DW 23 B	DW 25 B	716	1959	866	5800	925	STD
	710/70 R 38	175 D/ 178 A8	DW 23 B	-	716	1959	866	5800	925	STD
Ø 42"	580/70 R 42	158 D/ 161 A8	W 18 L	DW 18 L ; DD 18 L	577	1879	856	5693	900	STD
	620/70 R 42	160 D/ 163 A8	DW 20 B	DW 18 L ; W 18 L	625	1935	863	5786	925	STD
	620/70 R 42	166 D/ 169 A8	DW 20 B	DW 18 L ; W 18 L	625	1935	876	5801	925	STD
	620/70 R 42	173 D/ 176 A8	DW 20 B	DW 18 L ; W 18 L	625	1935	876	5804	925	STD
	710/70 R 42	173 D/ 176 A8	DW 23 B	DW 25 B	716	2061	935	6198	975	STD
	710/70 R 42	176 D/ 179 A8	DW 23 B	DW 25 B	716	2061	935	6198	975	STD
Ø 46"	620/70 R 46	162 D/ 165 A8	DW 20 B	-	625	2036	913	6075	975	STD

STD: Standard





Radial



# AGRIMAX V-FLECTO

RADIAL VF TECHNOLOGY TIRES

AGRIMAX V-FLECTO is BKT's response to the challenging demand of both technology and performance for high-power tractors. This tire is perfect for soil tillage and haulage applications thanks to reduced soil compaction and self-cleaning properties. With the innovative VF technology, AGRIMAX V-FLECTO can carry heavy loads with lower inflating pressure compared to standard and IF tires, reaching high speeds. It also features the Narrow Rim Option that allows mounting standard rims on the tire. BKT has designed this tire with optimized geometry to enhance driving comfort both in the fields and on the road reducing fuel consumption.

### Technologies



VF Technology



High Speed



Reinforced Bead



Narrow Rim Option

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Fuel Economy




Handling and Comfort



Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
		Rec.	Alt.							
Ø 18"	VF 280/70 R 18	116 D	W 9	9	274	849	375	2515	400	STD
Ø 28"	VF 340/85 R 28	139 D	W 12	W 11	355	1290	571	3833	625	STD
	VF 480/60 R 28 NRO	145 D	DW 16 L	W 16 L	470	1290	571	3807	625	STD
	VF 520/60 R 28 NRO	149 D	DW 18 L	W 18 L	516	1335	587	3910	650	STD
	VF 540/65 R 28 NRO	154 D	DW 20 B	DW 18 L	549	1413	622	4160	675	STD
	VF 600/60 R 28 NRO	157 D	DW 20 B	DW 18 L	587	1440	632	4228	675	STD
	VF 600/65 R 28 NRO	163 D	DW 21 B	DW 20 B	597	1491	655	4453	700	STD
	VF 600/70 R 28 NRO	167 D	DW 21 B	DW 20 B	603	1551	662	4596	725	STD
Ø 30"	VF 480/70 R 30	153 D	W 18 L	W 16 L ; DW 18 L	495	1430	645	4353	675	STD
	VF 540/65 R 30 NRO	158 D	DW 20 B	DW 18 L	549	1464	650	4351	700	STD
	VF 600/60 R 30 NRO	158 D	DW 20 B	DW 18 L ; DW 21 B	595	1485	649	4404	700	STD
	VF 600/70 R 30 NRO	168 D	DW 21 B	DW 20 B	603	1602	702	4711	750	STD
	VF 710/60 R 30	171 D	DW 25 B	DW 24 B ; DW 27 B	720	1625	701	4801	775	STD
Ø 34"	VF 480/70 R 34 NRO	166 D	W 18 L	W 16 L ; DW 18 L	495	1580	708	4739	750	STD
	VF 600/60 R 34	160 D	DW 20 B	DW 18 L ; DW 21 B	595	1584	691	4710	750	STD

UPCOMING SIZE

STD: Standard

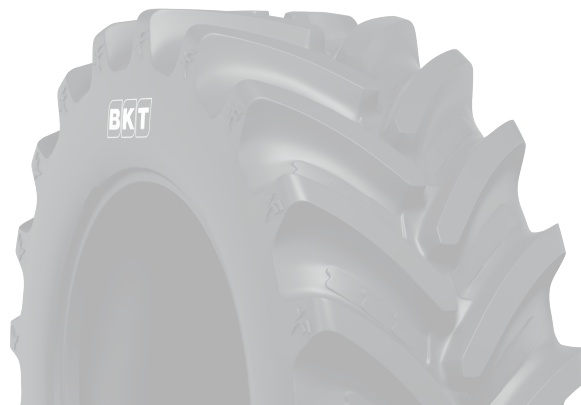



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 34"	<b>VF 600/65 R 34 NRO</b>	169 D	DW 21 B	DW 20 B	597	1644	731	4952	775	STD
	<b>VF 600/70 R 34 NRO</b>	170 D	DW 21 B	DW 20 B	603	1704	740	5025	800	STD
	<b>VF 650/60 R 34</b>	168 D	DW 23 B	DW 21 B	660	1676	750	4996	775	STD
	<b>VF 650/65 R 34 NRO</b>	170 D	DW 23 B	DW 21 B	650	1710	756	5110	825	STD
	<b>VF 710/55 R 34</b>	170 D	DW 25 B	DW 27 B	708	1659	726	4910	775	STD
	<b>VF 710/60 R 34 NRO</b>	173 D	DW 25 B	DW 24 B ; DW 27 B	708	1716	752	5097	825	STD
Ø 38"	<b>VF 480/80 R 38</b>	166 D	DW 16 L	DW 15 L	479	1733	774	5169	825	STD
	<b>VF 540/65 R 38 NRO</b>	162 D	DW 20 B	DW 18 L	549	1676	760	4981	800	STD
	<b>VF 600/60 R 38 NRO</b>	166 D	DW 20 B	DW 18 L	587	1685	757	5081	800	STD
	<b>VF 600/60 R 38 NRO</b>	168 D	DW 20 B	DW 18 L	587	1685	757	5077	800	STD
	<b>VF 650/60 R 38 NRO</b>	166 D	DW 23 B	DW 21 B	650	1745	774	5231	825	STD
	<b>VF 650/60 R 38 NRO</b>	173 D	DW 23 B	DW 21 B	650	1745	774	5217	825	STD
	<b>VF 650/65 R 38 NRO</b>	169 D	DW 23 B	DW 21 B	650	1811	798	5387	875	STD
	<b>VF 650/75 R 38 NRO</b>	175 D	DW 23 B	DW 21 B	675	1941	833	5796	925	STD
	<b>VF 650/85 R 38</b>	182 D	DW 23 B	DW 20 B ; DW 21 B	670	2071	887	6119	975	STD

STD: Standard





Radial



# AGRIMAX V-FLECTO

RADIAL VF TECHNOLOGY TIRES

AGRIMAX V-FLECTO is BKT's response to the challenging demand of both technology and performance for high-power tractors. This tire is perfect for soil tillage and haulage applications thanks to reduced soil compaction and self-cleaning properties. With the innovative VF technology, AGRIMAX V-FLECTO can carry heavy loads with lower inflating pressure compared to standard and IF tires, reaching high speeds. It also features the Narrow Rim Option that allows mounting standard rims on the tire. BKT has designed this tire with optimized geometry to enhance driving comfort both in the fields and on the road reducing fuel consumption.

### Technologies



VF Technology



High Speed



Reinforced Bead



Narrow Rim Option

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Fuel Economy





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 38"	VF 650/85 R 38 CFO	182 D	DW 23 B	DW 20 B ; DW 21 B	670	2071	887	6119	975	SPL
	VF 710/55 R 38	175 D	DW 25 B	DW 24 B	710	1750	780	5242	825	STD
	VF 710/60 R 38 NRO	171 D	DW 25 B	DW 23 B	708	1820	794	5447	875	STD
	VF 710/70 R 38	181 D	DW 24 B	DW 23 B ; DW 25 B	715	1961	843	5773	925	STD
	VF 710/75 R 38	183 D	DW 24 B	DW 23 B ; DW 25 B	720	2060	905	6151	950	STD
	VF 800/70 R 38 CFO	187 D	DW 28 B	DW 25 B ; DW 27 B ; DW 30 B	804	2085	890	6155	975	STD
	VF 900/60 R 38 NRO	187 D	DW 30 B	-	881	2045	882	6053	975	STD
Ø 42"	VF 480/80 R 42 CFO	168 D	DW 16 L	DW 15 L	479	1840	826	5465	875	STD
	VF 520/85 R 42 CFO	180 D	DW 18 L	-	535	1951	876	5841	925	STD
	VF 580/85 R 42 CFO	183 D	DW 20 B	DW 18 B ; MW 20 B	606	2058	923	6166	975	STD
	VF 580/85 R 42 CFO	183 D	DW 20 B	DW 18 B ; MW 20 B	606	2058	923	6166	975	SPL
	VF 620/70 R 42	175 D	DW 21 B	DW 20 B ; DW 23 B	620	1935	849	5795	925	STD
	VF 620/70 R 42 CFO	175 D	DW 21 B	DW 20 B ; DW 23 B	620	1935	849	5795	925	SPL
	VF 650/60 R 42	174 D	DW 23 B	DW 21 B	660	1845	834	5564	875	STD
VF 650/65 R 42 NRO	174 D	DW 23 B	DW 21 B	650	1913	852	5773	925	STD	

STD: Standard - SPL: Special





	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 42"	VF 650/75 R 42 CFO	180 D	DW 23 B	DW 21 B	680	2055	895	6143	975	SPL
	VF 650/85 R 42 CFO	183 D	DW 23 B	DW 20 B ; DW 21 B	680	2160	938	6413	1025	SPL
	VF 710/60 R 42 NRO	173 D	DW 25 B	DW 23 B ; MW 25 B	710	1930	860	5786	925	STD
	VF 710/70 R 42	185 D	DW 25 B	DW 23 B ; DW 24 B	715	2061	921	6182	975	STD
	VF 710/70 R 42	193 D	DW 25 B	DW 23 B ; DW 24 B	720	2058	928	6233	975	SB
	VF 710/70 R 42 CFO	185 D	DW 25 B	DW 23 B ; DW 24 B	715	2061	921	6182	975	SPL
	VF 710/70 R 42 CFO	193 D	DW 25 B	DW 23 B ; DW 24 B	720	2058	928	6233	975	SB SPL
	VF 710/75 R 42	184 D	DW 24 B	DW 23 B ; DW 25 B	730	2150	937	6412	1000	STD
	VF 900/60 R 42 CFO	189 D	DW 30 B	-	900	2142	937	6390	1025	SPL
	VF 900/60 R 42 CFO	195 D	DW 30 B	-	900	2142	944	6410	1025	SB
VF 900/60 R 42 NRO	189 D	DW 30 B	-	900	2142	937	6390	1025	STD	
Ø 44"	VF 750/70 R 44	186 D	DW 25 B	DW 24 B	760	2175	958	6450	1025	STD
Ø 46"	VF 480/80 R 46 CFO	175 D	DW 16 L	DW 15 L	479	1940	892	5855	925	SB
	VF 520/85 R 46 CFO	173 D	DW 18 L	-	535	2052	911	6111	975	STD
	VF 710/60 R 46	174 D	DW 25 B	DW 27 B	715	2041	896	6092	975	STD

STD: Standard - SB: Steel Belted - SB SPL: Steel Belted Special - SPL: Special





Radial



# AGRIMAX V-FLECTO

RADIAL VF TECHNOLOGY TIRES

AGRIMAX V-FLECTO is BKT's response to the challenging demand of both technology and performance for high-power tractors. This tire is perfect for soil tillage and haulage applications thanks to reduced soil compaction and self-cleaning properties. With the innovative VF technology, AGRIMAX V-FLECTO can carry heavy loads with lower inflating pressure compared to standard and IF tires, reaching high speeds. It also features the Narrow Rim Option that allows mounting standard rims on the tire. BKT has designed this tire with optimized geometry to enhance driving comfort both in the fields and on the road reducing fuel consumption.

### Technologies



VF Technology



High Speed



Reinforced Bead



Narrow Rim Option

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Fuel Economy



Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 46"	VF 710/60 R 46 CFO	174 D	DW 25 B	DW 27 B	715	2041	896	6092	975	SPL
	VF 900/65 R 46	193 D	DW 30 B	-	920	2315	1003	6886	1100	STD
	VF 900/65 R 46	193 D	DW 30 B	-	900	2338	1006	7003	1100	SB
	VF 900/65 R 46 CFO	193 D	DW 30 B	-	920	2315	1003	6886	1100	SPL
	VF 900/65 R 46 CFO	193 D	DW 30 B	-	900	2338	1006	7003	1100	SB SPL
Ø 50"	VF 480/80 R 50 CFO	179 D	DW 16 L	DW 15 L	479	2038	938	6195	975	SB
	VF 520/85 R 50 CFO	177 D	DW 18 L	DW 16 L	535	2160	972	6493	1025	SB

STD: Standard - SB: Steel Belted - SB SPL: Steel Belted Special - SPL: Special



**AGRI MAX V-FLECTO**

**W**  
**K**  
**F**

BY 210 / BY 200  
IF / WF STANDARD  
BY 16L  
(160. narrow flange option)

**B**  
**K**  
**F**

VF600/60R30 NFO  
R1W RADIAL

158D  
ALL TREAD PATENTED IN USA  
ALL TREAD PATENTED IN USA

USELESS  
IF USED WITH  
INSTEAD OF





Radial

R-1

D

189

# AGRIMAX SPARGO

RADIAL VF SPRAYER TIRES



AGRIMAX SPARGO is the special BKT tire for row crop applications. It has been designed for enhanced productivity in the fields and for preserving the soil in the long term. Thanks to VF technology, the tire provides higher load capacity at standard pressure. Thanks to a strong casing and an increased number of lugs, AGRIMAX SPARGO ensures outstanding durability along with strong stability both in the fields and during road transfers.

### Technologies



VF Technology



Strong Casing



More Lugs

### Performance



High Load Capacity



Durability





Stability

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 34"	VF 380/85 R 34	160 D	W 13 A	W 12	380	1500	678	4514	725	STD
Ø 38"	VF 380/85 R 38	161 D	W 13 A	W 12	380	1602	730	4830	775	STD
Ø 42"	VF 320/90 R 42	163 D	W 11	W 10 ; DW 10 ; W 10 L ; DW 11	323	1642	764	4995	775	STD
	VF 480/80 R 42	176 D	DW 16 L	DW 15 L	479	1835	838	5572	875	STD
Ø 46"	VF 320/90 R 46	165 D	W 11	W 10 ; DW 10 ; W 10 L ; DW 11	323	1743	810	5316	825	STD
	VF 380/90 R 46	173 D	DW 13 A	W 13 A ; DW 12	390	1852	846	5611	875	STD
	VF 380/90 R 46	175 D	DW 13 A	W 13 A ; DW 12	390	1852	848	5582	875	STD
	VF 480/80 R 46	177 D	DW 16 L	DW 15 L	479	1936	892	5907	925	STD
	VF 750/60 R 46	189 D	DW 27 B	-	755	2086	940	6337	1000	SB
Ø 50"	VF 320/90 R 50	169 D	W 11	W 10 ; DW 10 ; W 10 L ; DW 11	323	1846	865	5650	875	STD
	VF 380/90 R 50	175 D	W 13 B	W 12 B	390	1950	893	5950	925	STD
	VF 380/105 R 50	179 D	W 13 A	W 12 ; DW 12 ; DW 13 ; DW 13 L	400	2050	934	6211	975	STD
	VF 420/95 R 50	177 D	DW 14	DW 13 ; W 13 ; W 14	419	2068	943	6210	975	STD

STD: Standard - SB: Steel Belted



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 50"	VF 480/80 R 50	179 D	DW 16 L	DW 15 L	479	2038	947	6224	975	STD
	VF 480/95 R 50	181 D	DW 16 L	DW 15 L	479	2182	991	6606	1025	STD
Ø 54"	VF 320/90 R 54 CFO	168 D	W 11	W 10 ; DW 10 ; W 10 L ; DW 11	323	1948	910	5946	925	STD
	VF 380/90 R 54	176 D	W 13	DW 13 ; DW 12 ; W 12	383	2056	948	6232	975	STD
	VF 380/105 R 54	180 D	W 13 A	W 12 ; DW 12 ; DW 13 ; DW 13 L	400	2140	984	6503	1025	STD
	VF 480/95 R 54 CFO	180 D	DW 16 L	DW 15 L	509	2300	1033	6956	1075	STD

STD: Standard





Radial



176



# AGRIMAX SPARGO SB

RADIAL VF SPRAYER TIRES

AGRIMAX SPARGO SB is a special row crop tire that is particularly suitable for tractors and sprayers in open-field spraying and row crop applications, or for specialized tractors in orchards and vineyards. Thanks to its advanced VF-technology (Very Increased Flexion), the tire is able to carry 40% heavier load compared to a standard tire of the same size at the same inflation pressure. The wide footprint ensures uniform weight distribution as well as low soil compaction in the fields. AGRIMAX SPARGO SB stands for excellent performance and high speed-efficiency both on and off the road, up to 65 km/h. Moreover, the robust polyester casing provides improved durability, better handling and dimensional stability as well as enhanced equipment stability and control both in the fields and on the road, thus avoiding the risk of tire slippage and reducing fuel consumption. AGRIMAX SPARGO SB features a special sidewall design that provides tire flexibility and reduces vibrations - essential for operations with precision sprayers. Finally, the steel-belted construction guarantees excellent puncture resistance plus outstanding support of heavy loads, while the extraordinarily strong lug design stands for improved traction. The combination of all these features results in a lower economic and environmental impact, increasing productivity and operator comfort at the same time.

## Technologies



VF Technology



Steel Belted



Strong Casing



Larger Footprint



High Speed

## Performance



On/Off Road



Self-Cleaning



Handling and Comfort



Stability

Ø	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
32"	VF 270/95 R 32	148 D	W 9	-	280	1339	617	4080	650	SB
34"	VF 420/85 R 34	165 D	DW 15 L	DW 14 L	429	1578	716	4779	750	SB
36"	VF 270/95 R 36	150 D	W 9	-	280	1441	664	4397	700	SB
38"	VF 270/95 R 38	151 D	W 9	-	280	1491	692	4546	725	SB
	VF 380/95 R 38	165 D	W 13	W 12	395	1690	767	5116	800	SB
46"	VF 380/90 R 46 CFO	173 D	W 13	W 12 ; DW 13	400	1852	856	5668	875	SB
48"	VF 270/95 R 48	155 D	W 9	-	280	1745	815	5373	850	SB
50"	VF 380/90 R 50 CFO	175 D	W 13	W 12 ; DW 13	400	1954	903	5986	925	SB
54"	VF 270/95 R 54	157 D	W 9	-	280	1900	895	5843	900	SB
	VF 320/90 R 54	168 D	W 11	W 10 ; DW 10 A ; DW 11	323	1960	918	6031	925	SB
	VF 380/90 R 54	176 D	W 13	W 12 ; DW 12 ; W 13 A ; DW 13 ; DW 13 A	395	2060	957	6310	975	SB

SB: Steel Belted





Radial



165



# AGRIMAX PROCROP

AGRIMAX PROCROP is precisely engineered to meet modern farming demand in row crop and spraying applications. The advanced VF (Very High Flexion) technology allows AGRIMAX PROCROP to carry 40% more load compared to standard tires with same tire pressure. At the same time, the wide footprint of AGRIMAX PROCROP ensures low soil compaction and excellent load distribution that avoids damage to crops. The lug block design of AGRIMAX PROCROP is optimized to enhance traction on less compact soils, such as sandy or freshly plowed fields. This feature allows the tire to perform effectively in challenging conditions, ensuring excellent grip and reducing the risk of slippage. On asphalt, good roadability is guaranteed by the closed tread center and the strong sidewall that gives high lateral stability while travelling on the road. AGRIMAX PROCROP ensures superior performance even at high speed of 65 km/h. The strong polyester structure of the tire provides improved durability, better handling as well as dimensional stability enhancing vehicle stability and control. The steel belts offer excellent puncture resistance.

## Technologies



VF Technology



Larger Footprint



High Speed



Steel Belted



Strong Casing

## Performance



Reduced Soil Compaction



Field Protection



High Load Capacity



Stability



Traction



Self-Cleaning



Durability



Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 32"	VF 270/95 R 32	148 D	W 9	-	280	1339	618	4056	650	SB
Ø 36"	VF 270/95 R 36	150 D	W 9	-	280	1441	665	4393	700	SB
Ø 38"	VF 270/95 R 38	151 D	W 9	-	280	1491	695	4541	725	SB
Ø 46"	VF 320/90 R 46 CFO	165 D	DW 11	W 11 ; DW 10	323	1750	817	5345	825	SB
Ø 48"	VF 230/95 R 48	148 D	W 8	W 7	233	1660	785	5100	800	SB
	VF 270/95 R 48	155 D	W 9	-	280	1745	815	5330	850	SB
Ø 54"	VF 270/95 R 54	157 D	W 9	-	280	1900	895	5830	925	SB

SB: Steel Belted





# AGRIMAX PROHARVEST

AGRIMAX PROHARVEST is BKT's response to the current market needs in terms of combines and harvesting machines. The advanced VF (Very High Flexion) technology allows AGRIMAX PROHARVEST to carry 40% more load compared to standard tires with the same tire pressure minimizing soil compaction. Moreover, the three layers of steel belts combined with the cut and chip resistant compound ensure excellent puncture resistance, even on case of stubbles or crops leftovers on the field. The structure of the tire with a reinforced bead and a strong polyester carcass is synonym of durability and stability of the tire even during heavy duty operation. The tire casing, engineered to guarantee high load capacity, combined with the CFO (Cyclic Field Operation) technology allows AGRIMAX PROHARVEST to handle temporary overloads during operations like harvesting, reducing stress and wear on the tire. Once the load is reduced, the tire returns to its standard operating condition, thus extending its service life and improving operational efficiency. The open shoulder design improves traction on rough and wet terrain while facilitating the ejection of mud and debris, ensuring smooth transitions from field to road and enhancing safety. On the field and on the road AGRIMAX PROHARVEST can reach up to 65km/h making your transit operation easier and faster thus improving overall productivity.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 32"	VF 800/70 R 32 CFO	187 D	DW 28 B	DW 27 B ; DW 30 B	804	1933	846	5817	925	SB
	VF 900/60 R 32 CFO	193 D	DW 30 B	-	881	1900	837	5712	900	SB
	VF 1000/55 R 32 CFO	197 D	36.00 VA (multi-piece)	-	1006	1900	841	5703	900	SB
Ø 38"	VF 1020/55 R 38 CFO <b>UPCOMING SIZE</b>	200 D	36.00 VA	-	1010	2060	-	-	975	SB

SB: Steel Belted



Radial



D



200

## Technologies



VF Technology



Steel Belted



Reinforced Bead



Reinforced Shoulder



Strong Casing



High Speed

## Performance



Cut and Chip Resistance



Self-Cleaning



Traction



Durability



High Load Capacity



Radial

R-1W



D



192

Technologies



IF Technology



High Speed



Reinforced Bead

Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Fuel Economy



Handling and Comfort



# AGRIMAX FORCE



RADIAL IF TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters, ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy in addition to a comfortable riding experience.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD
	IF 710/55 R 28 CFO	165 D	DW 25 B	-	716	1493	663	4442	700	STD
Ø 30"	IF 600/70 R 30 CFO	165 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1602	708	4800	750	STD
	IF 600/70 R 30 CFO	165 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1602	708	4800	750	SPL
	IF 620/75 R 30 CFO	169 D	DW 23 B	DW 21 B	650	1703	759	5100	800	STD
	IF 710/55 R 30 CFO	166 D	DW 25 B	-	716	1544	686	4616	725	STD
	IF 710/60 R 30 CFO	168 D	DW 25 B	-	708	1614	714	4814	775	STD
Ø 34"	IF 600/70 R 34	167 D	DW 21 B ; DW 21 A	DW 20 A ; DW 20 B	603	1704	757	5070	800	STD
	IF 650/60 R 34	165 D	DW 23 B	DW 21 B	650	1644	746	4954	775	STD
	IF 650/65 R 34 CFO	161 D	DW 23 B	DW 20 B	650	1710	764	5078	825	SPL
	IF 650/65 R 34 CFO	161 D	DW 23 B	DW 20 B	650	1710	764	5078	825	STD
	IF 710/55 R 34 CFO	170 D	DW 25 B	-	716	1646	746	4962	775	STD
	IF 710/60 R 34 CFO	170 D	DW 25 B	-	708	1716	763	5126	825	SPL
	IF 710/60 R 34 CFO	170 D	DW 25 B	-	708	1716	763	5126	825	STD

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
<b>Ø 34"</b>	<b>IF 710/75 R 34 CFO</b>	178 D	DW 25 B	DW 23 B	716	1929	870	5775	900	STD
<b>Ø 38"</b>	<b>IF 380/80 R 38</b>	149 D	W 12	W 11 ; W 13	380	1573	725	4793	750	STD
	<b>IF 420/85 R 38</b>	155 D	DW 14 L	DW 15 L	419	1670	780	5017	800	STD
	<b>IF 650/65 R 38 CFO</b>	169 D	DW 23 B	-	650	1830	830	5510	875	STD
	<b>IF 650/75 R 38 CFO</b>	175 D	DW 23 B	DW 21 B	651	1941	866	5802	925	SPL
	<b>IF 650/75 R 38 CFO</b>	175 D	DW 23 B	DW 21 B	651	1941	866	5802	925	STD
	<b>IF 650/85 R 38 CFO</b>	179 D	DW 23 B	DW 20 B ; DW 21 B	663	2071	927	6106	975	STD
	<b>IF 710/60 R 38</b>	172 D	DW 25 B	-	708	1817	812	5405	875	STD
	<b>IF 800/70 R 38 CFO</b>	184 D	DW 27 B	DW 25 B ; DW 28 B ; DW 30 B	794	2085	923	6184	975	STD
	<b>IF 900/60 R 38 CFO</b>	184 D	DW 30 A ; DW 30 B	TW 31 B	916	2045	904	6107	975	STD
<b>Ø 42"</b>	<b>IF 650/85 R 42 CFO</b>	180 D	DW 23 B	-	650	2173	965	6400	1025	STD
	<b>IF 710/70 R 42 CFO</b>	179 D	DW 25 B	DW 23 B	716	2061	919	6168	975	STD
	<b>IF 710/70 R 42 CFO</b>	179 D	DW 25 B	DW 23 B	716	2061	919	6168	975	SPL
	<b>IF 710/75 R 42 CFO</b>	181 D	DW 25 B	DW 23 B	716	2133	967	6403	1000	STD

STD: Standard - SPL: Special





Radial

R-1W

D

192



# AGRIMAX FORCE

RADIAL IF TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters, ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy in addition to a comfortable riding experience.

### Technologies



IF Technology



High Speed



Reinforced Bead

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Fuel Economy



Handling and Comfort



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 42"	IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	716	2133	967	6403	1000	SPL
	IF 800/70 R 42 CFO	186 D	DW 27 B	DW 25 B ; DW 28 B ; DW 30 B	794	2150	950	6400	1025	STD
	IF 800/70 R 42 CFO	192 D	DW 27 B	DW 25 B ; DW 28 B ; DW 30 B	794	2150	950	6400	1025	STD
	IF 900/50 R 42 CFO	180 D	DW 30 B	TW 30 B	881	1955	872	5830	950	STD
	IF 900/60 R 42 CFO	186 D	DW 30 B	TW 30 B	916	2147	950	6416	1025	STD
Ø 46"	IF 750/75 R 46 CFO	186 D	DW 25 B	-	742	2294	1032	6802	1075	STD
Ø 50"	IF 480/95 R 50	170 D	DW 16 B	-	479	2170	1002	6574	1025	STD

STD: Standard



# RIDEMAX FROST

RIDEMAX FROST is engineered by BKT for tractors operating in transport and municipal maintenance during snow and ice conditions. With a cold-resistant, specially formulated compound, the tire maintains flexibility and elasticity even at sub-zero temperatures, ensuring optimal grip in extreme winter environments. The tread, featuring multiple sipes, delivers excellent traction on snowy and icy surfaces, creating micro-edges and partial vacuum in the slit that improve grip and reduce the risk of slippage. Additionally, the tread design incorporates snow, utilizing snow-to-snow adhesion to further enhance traction. The compound, made from natural rubber and specific additives, ensures the tire remains flexible and durable in harsh conditions. These specialized compounds also protect the rubber from degradation caused by low temperatures, UV rays, and ozone, prolonging the tire's lifespan. Silica reinforcements increase resistance to cuts and tears on rough or icy terrain, without compromising flexibility. Moreover, RIDEMAX FROST provides superior driving comfort, reducing vibrations and driver fatigue, ensuring safe and efficient operations even during long working hours in winter.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 24"	440/80 R 24	-	-	-	-	-	-	-	-	-
	<b>UPCOMING SIZE</b>									
Ø 28"	440/80 R 28	-	-	-	-	-	-	-	-	-
	<b>UPCOMING SIZE</b>									
	440/80 R 28 IND	156 A8/151 D	DW 14 L	DW 15 L	441	1419	642	4296	675	SB
Ø 38"	480/80 R 38	-	-	-	-	-	-	-	-	-
	<b>UPCOMING SIZE</b>									
	540/80 R 38 IND	172 A8/167 D	DW 18 L	DW 16 L	550	1835	842	5591	875	SB

SB: Steel Belted



Radial



D



172

### Technologies



Snow Pattern



Stability

### Performance



Ice and Snow



Comfort



Traction



Radial



# AGRIMAX SIRIO

FAST SPEED RADIAL TIRES



AGRIMAX SIRIO is a high-speed tire (up to 70 km/h - 45 mph) developed by BKT for high-performance tractors. Its design is perfect for both haulage and soil tillage applications. The high sidewall flexibility ensures outstanding stability, handling and comfort to improve the driving experience. It is also available with IF technology that allows to carry heavy loads at a low inflating pressure. The reinforced casing and the high number of belts guarantee great traction on the field whereas the low rolling resistance contributes to better fuel economy.

### Technologies



IF Technology



High Speed



Reinforced Carcass



More Belts

### Performance



Handling and Comfort



Fuel Economy



Stability



Traction



High Load Capacity

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 30"	540/65 R 30	150 D/147 E	W 16 L	W 18	530	1464	669	4400	700	HS
	IF 600/70 R 30	165 D/162 E	DW 21 B	DW 20 B	603	1602	713	4759	750	HS
Ø 34"	540/65 R 34	152 D/149 E	W 16 L	W 18	530	1566	721	4735	750	HS
Ø 38"	540/65 R 38	153 D/150 E	W 16 L	W 18 L	530	1667	769	5050	800	HS
	710/70 R 38	171 D/168 E	DW 23 B	DW 25 B	716	1959	887	5840	925	HS

HS: High Speed







# AGRIMAX FORTIS

RADIAL EXTRA LARGE TIRES

AGRIMAX FORTIS is your reliable partner for all preparation, soil tillage and haulage operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads reaching up to 65 km/h (40 MPH). It ensures outstanding traction along with top handling and best comfort for a perfect driving experience. The tire has been designed with a reinforced nylon casing for enhanced productivity in the fields preserving the soil thanks to reduced compaction.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 30"	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L ; W 18 L	611	1602	724	4810	750	STD
	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L ; W 18 L	611	1602	724	4810	750	SPL
Ø 34"	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B ; W 18 L	591	1704	761	5109	800	STD
	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B ; W 18 L	591	1704	761	5109	800	SPL
Ø 38"	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B ; DW 20 B	675	2071	935	6184	975	STD
	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B ; DW 20 B	675	2071	935	6184	975	SPL
	800/70 R 38	178 D/181 A8	DW 25 B	DW 27 B	798	2085	912	6202	975	STD
Ø 42"	710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6406	1000	STD
	710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6406	1000	SPL

STD: Standard - SPL: Special



Radial



### Technologies



High Speed



Reinforced Carcass

### Performance



Traction



High Load Capacity



Handling and Comfort



Reduced Soil Compaction



Radial



# AGRIMAX RT 657

RADIAL TRACTOR TIRES



AGRIMAX RT 657 is the ideal tire for on-the-road usage and soil tillage; some sizes are also suitable for vineyard harvesting. This tire guarantees excellent driving comfort as well as significant fuel savings. It has a high load capacity also at high speed levels. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.

### Technologies



High Speed

### Performance



Reduced Soil Compaction



Handling and Comfort



Fuel Economy



Traction





High Load Capacity

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	
			Rec.	Alt.							
Ø 16"	320/65 R 16	117 D/120 A8	W 10	W 9 ; W 11	319	822	366	2466	390	STD	
	Ø 18"	320/65 R 18	109 A8/B	W 10	W 9 ; W 11	319	873	392	2587	425	STD
		320/65 R 18	125 A8/B	W 10	W 9 ; W 11	310	885	400	2667	425	STD
Ø 20"	340/65 R 18	113 A8/B	W 11	W 10 ; W 12	343	899	400	2667	425	STD	
	Ø 20"	340/65 R 20	124 D/127 A8	W 11	W 10 ; W 12	343	950	430	2892	450	STD
		420/65 R 20	135 D/138 A8	W 13	W 11 ; W 12	418	1054	468	3162	500	STD
Ø 24"	440/65 R 20	138 D/141 A8	W 14 L	W 13 ; W 15 L	441	1080	479	3240	525	STD	
	Ø 24"	420/65 R 24	138 D/141 A8	W 13	W 11 ; W 12	418	1156	519	3468	550	STD
		440/65 R 24	135 D/138 A8	W 14 L	W 13 ; W 15 L	441	1182	538	3546	575	STD
Ø 24"	440/65 R 24	135 D/138 A8	W 14 L	W 13 ; W 15 L	441	1182	538	3546	575	SPL	
	480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	STD	
	480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	SPL	
	540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	STD	
	540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	SPL	

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 28"	<b>420/65 R 28</b>	135 D/138 A8	W 13	W 11 ; W 12	418	1257	584	3824	600	STD
	<b>440/65 R 28</b>	138 D/141 A8	W 14 L	W 13 ; W 15 L	441	1283	590	3927	625	STD
	<b>480/65 R 28</b>	142 D/145 A8	W 15 L	W 14 L	479	1335	610	4091	650	STD
	<b>540/65 R 28</b>	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	STD
	<b>540/65 R 28</b>	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	SPL
	<b>600/65 R 28</b>	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	STD
	<b>600/65 R 28</b>	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	SPL
Ø 30"	<b>420/65 R 30</b>	136 D/139 A8	W 13	W 11 ; W 12	418	1308	606	3952	625	STD
	<b>540/65 R 30</b>	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	STD
	<b>540/65 R 30</b>	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	SPL
	<b>600/65 R 30</b>	155 D/158 A8	DW 20 B	W 18 L	611	1542	697	4609	725	STD
Ø 34"	<b>540/65 R 34</b>	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	STD
	<b>540/65 R 34</b>	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	SPL
	<b>600/65 R 34</b>	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	STD

STD: Standard - SPL: Special





Radial



# AGRIMAX RT 657

RADIAL TRACTOR TIRES



AGRIMAX RT 657 is the ideal tire for on-the-road usage and soil tillage; some sizes are also suitable for vineyard harvesting. This tire guarantees excellent driving comfort as well as significant fuel savings. It has a high load capacity also at high speed levels. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.

### Technologies



High Speed

### Performance



Reduced Soil Compaction



Handling and Comfort



Fuel Economy



Traction



High Load Capacity

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 34"	600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	SPL
Ø 38"	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	STD
	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	SPL
	600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825	SPL
	600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825	STD
	650/65 R 38	163 D/166 A8	DW 20 B	DW 21 B ; DW 23 B	645	1811	830	5483	875	SPL
	650/65 R 38	163 D/166 A8	DW 20 B	DW 21 B ; DW 23 B	645	1811	830	5483	875	STD
	650/65 R 38	178 A8/175 B	DW 20 B	DW 21 B ; DW 23 B	645	1816	827	5488	875	SB
900/55 R 38	179 D/181 A8	DW 27 B	DW 30 B	880	1950	880	5842	925	STD	
Ø 42"	650/65 R 42	165 D/168 A8	DW 20 B	DW 21 B ; DW 23 B	645	1913	878	5810	925	STD

STD: Standard - SPL: Special - SB: Steel Belted







# AGRIMAX RT 765

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 16"	200/70 R 16	94 A8/B	W 6	-	197	686	315	2060	330	STD
	220/70 R 16	99 A8/B	W 7	W 8	221	715	324	2145	340	STD
	240/70 R 16	104 A8/B	W 8	W 8 L; W 9 L	244	742	335	2176	350	STD
	260/70 R 16	109 A8/B	W 8	W 8 L; W 9 L	258	770	346	2283	370	STD
	280/70 R 16	112 A8/B	W 9	W 8; W 8 L; W 10	282	798	356	2370	380	STD
Ø 18"	280/70 R 18	114 A8/B	W 9	W 8; W 10	275	849	381	2547	400	STD
Ø 20"	260/70 R 20	113 A8/B	W 8	9; W 9	258	872	402	2639	425	STD
	260/70 R 20	113 A8/B	W 8	9; W 9	258	872	402	2639	425	SPL
	280/70 R 20	116 A8/B	W 9	W 8; W 10	275	900	408	2705	450	STD
	280/70 R 20	116 A8/B	W 9	W 8; W 10	275	900	408	2705	450	SPL
	300/70 R 20	120 A8/B	W 9	W 10	295	952	428	2854	450	STD
	320/70 R 20	123 A8/B	W 10	W 9; W 11	319	982	445	2938	475	STD
	360/70 R 20	129 A8/B	W 11	W 10; W 12	357	1042	469	3122	475	STD
	380/70 R 20	132 A8/B	W 12	W 11; W 13	380	1082	482	3213	525	STD

STD: Standard - SPL: Special



Radial

R-1W

D

180

Technologies



High Speed



Steel Belted

Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Handling and Comfort





Radial

R-1W

D

180

# AGRIMAX RT 765

RADIAL TRACTOR TIRES



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.

### Technologies



High Speed



Steel Belted

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 24"	320/70 R 24	116 D	W 10	W 9 ; W 11	319	1094	502	3245	525	STD
	320/70 R 24	116 D	W 10	W 9 ; W 11	319	1094	502	3245	525	SPL
	360/70 R24	122 D	W 11	W 10 ; W 12	357	1152	519	3395	550	STD
	360/70 R 24	122 D	W 11	W 10 ; W 12	357	1152	519	3395	550	SPL
	380/70 R 24	125 D	W 12	W 11 ; W 13	380	1190	538	3560	575	STD
	380/70 R 24	125 D	W 12	W 11 ; W 13	380	1190	538	3560	575	SPL
	420/70 R 24	130 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	STD
	420/70 R 24	130 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	SPL
	420/70 R 24	134 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	STD
	420/70 R 24	134 D	W 13	W 12 ; W 14 L	418	1248	554	3680	600	SPL
	480/70 R 24	138 D	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	STD
	480/70 R 24	138 D	W 15 L	W 14 L ; W 16 L	479	1316	580	3894	625	SPL
Ø 28"	360/70 R 28	125 D	W 11	W 10 ; W 12	357	1251	579	3767	600	STD
	360/70 R 28	125 D	W 11	W 10 ; W 12	357	1251	579	3767	600	SPL

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 28"	380/70 R 28	127 D	W 12	W 11 ; W 13	380	1293	586	3883	625	STD
	380/70 R 28	127 D	W 12	W 11 ; W 13	380	1293	586	3883	625	SPL
	420/70 R 28	133 D	W 13	W 12 ; W 14 L	418	1349	604	4020	650	STD
	420/70 R 28	133 D	W 13	W 12 ; W 14 L	418	1349	604	4020	650	SPL
	480/70 R 28	140 D	W 15 L	W 14 L ; W 16 L	479	1421	634	4185	675	STD
	480/70 R 28	140 D	W 15 L	W 14 L ; W 16 L	479	1421	634	4185	675	SPL
	600/70 R 28	157 D	DW 18 L	DW 20 B	591	1551	696	4692	725	STD
Ø 30"	420/70 R 30	134 D	W 13	W 12 ; W 14 L	418	1398	631	4172	675	STD
	420/70 R 30	134 D	W 13	W 12 ; W 14 L	418	1398	631	4172	675	SPL
	480/70 R 30	141 D	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	STD
	480/70 R 30	141 D	W 15 L	W 14 L ; W 16 L	479	1478	659	4372	700	SPL
	600/70 R 30	152 D	DW 20 B	DW 18 L ; W 18 L	611	1602	711	4774	750	STD
	600/70 R 30	152 D	DW 20 B	DW 18 L ; W 18 L	611	1602	711	4774	750	SPL
Ø 34"	480/70 R 34	149 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4772	750	STD

STD: Standard - SPL: Special





Radial

R-1W

D

180

# AGRIMAX RT 765

RADIAL TRACTOR TIRES



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.

### Technologies



High Speed



Steel Belted

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 34"	480/70 R 34	149 D	W 15 L	W 14 L ; W 16 L	479	1580	711	4772	750	SPL
	480/70 R 34	155 D	W 15 L	W 14 L ; W 16 L	479	1580	728	4788	750	STD
	480/70 R 34	155 D	W 15 L	W 14 L ; W 16 L	479	1580	728	4788	750	SPL
	520/70 R 34	148 D	W 16 L	W 15 L ; W 18 L	516	1640	739	4927	775	STD
	520/70 R 34	148 D	W 16 L	W 15 L ; W 18 L	516	1640	739	4927	775	SPL
Ø 38"	480/70 R 38	145 D	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	STD
	480/70 R 38	145 D	W 15 L	W 14 L ; W 16 L	479	1681	764	5055	800	SPL
	520/70 R 38	150 D	W 16 L	W 15 L ; W 18 L	516	1749	793	5300	825	STD
	520/70 R 38	150 D	W 16 L	W 15 L ; W 18 L	516	1749	793	5300	825	SPL
	580/70 R 38	155 D	W 18 L	-	577	1827	821	5471	875	STD
	580/70 R 38	155 D	W 18 L	-	577	1827	821	5471	875	SPL
	580/70 R 38	180 A8	W 18 L	-	577	1827	821	5505	875	SB
	580/70 R 38	180 D	W 18 L	DW 18 L ; DD 18 L	577	1827	821	5505	875	SB
	620/70 R 38	170 D	DW 20 B	DW 18 L ; W 18 L	625	1833	828	5591	875	STD

STD: Standard - SPL: Special - SB: Steel Belted



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 38"	<b>620/70 R 38</b>	170 D	DW 20 B	DW 18 L ; W 18 L	625	1833	828	5591	875	SPL
	<b>650/75 R 38</b>	169 D	DW 21 B	DW 20 B ; DW 23 B	655	1941	874	5820	925	STD
	<b>710/70 R 38</b>	166 D	DW 23 B	-	716	1959	859	5751	925	STD
	<b>710/70 R 38</b>	166 D	DW 23 B	-	716	1959	859	5751	925	SPL
	<b>710/70 R 38</b>	171 D/174 A8	DW 23 B	-	716	1959	859	5751	925	STD
	<b>710/70 R 38</b>	175 D/178 A8	DW 23 B	-	716	1959	859	5751	925	STD
	<b>710/70 R 38</b>	175 D/178 A8	DW 23 B	-	716	1959	859	5751	925	SPL
Ø 42"	<b>620/70 R 42</b>	160 D	DW 20 B	DW 18 L	625	1935	876	5742	925	STD
	<b>620/70 R 42</b>	160 D	DW 20 B	DW 18 L	625	1935	876	5742	925	SPL
	<b>620/70 R 42</b>	166 D	DW 20 B	DW 18 L	625	1935	876	5801	925	STD
	<b>620/70 R 42</b>	166 D	DW 20 B	DW 18 L	625	1935	876	5801	925	SPL
	<b>620/70 R 42</b>	173 D	DW 20 B	DW 18 L	625	1935	876	5804	925	STD
	<b>620/70 R 42</b>	173 D	DW 20 B	DW 18 L	625	1935	876	5804	925	SPL
	<b>650/75 R 42</b>	170 D	DW 21 B	DW 20 B ; DW 23 B	655	2043	916	6147	975	STD

STD: Standard - SPL: Special





Radial



# AGRIMAX RT 765

RADIAL TRACTOR TIRES



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.

### Technologies



High Speed



Steel Belted

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



High Load Capacity



Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 42"	710/70 R 42	173 D/176 A8	DW 23 B	DW 25 B	716	2061	922	6174	975	STD
	710/70 R 42	176 D/179 A8	DW 23 B	DW 25 B	716	2061	922	6174	975	STD
	710/70 R 42	176 D/179 A8	DW 23 B	DW 25 B	716	2061	922	6174	975	SPL
Ø 46"	620/70 R 46	162 D	DW 20 B	-	625	2036	924	6106	975	STD
	620/70 R 46	162 D	DW 20 B	-	625	2036	924	6106	975	SPL

STD: Standard - SPL: Special





# AGRIMAX RT 855

RADIAL TRACTOR TIRES

AGRIMAX RT 855 provides excellent traction and comfort properties. Mainly designed for soil tillage and both field and road transport, some sizes are also suitable for spraying, and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

Ø	Tire size	LI/SS		RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
		DW	FR	Rec.	Alt.						
16"	180/95 R 16 (6.50 R 16)	105 A8/B		5.5 F	6.0 F	185	760	340	2265	350	STD
	210/95 R 16 (7.50 R 16)	-	116 A8	W 7	W 6 ; 6 LB	214	806	350	2353	370	IMP
	210/95 R 16 (7.50 R 16)	106 A8/B		W 7	W 6 ; 6 LB	214	806	360	2387	370	STD
18"	210/95 R 18 (7.50 R 18)	108 A8/B		W 7	W 6	214	855	385	2565	400	STD
	210/95 R 18 (7.50 R 18)	-	122 A8	W 7	W 6	214	855	378	2565	400	IMP
	250/80 R 18	125 A8/125 B		W 8	W 7 ; W 9	250	835	375	2539	410	STD
20"	210/90 R 20 (8.3 R 20)	110 A8/B		W 7	W 6	211	890	412	2681	425	STD
	210/95 R 20 (7.50 R 20)	110 A8/B		W 7	W 6	214	908	418	2749	425	STD
	250/85 R 20 (9.5 R 20)	116 A8/B		W 8	W 7 ; W 9	250	940	424	2812	450	STD
	280/85 R 20 (11.2 R 20)	112 A8/B		W 10	W 9	292	984	441	2952	475	STD
	280/85 R 20 (11.2 R 20)	122 A8/B		W 10	W 9	292	984	447	2977	475	STD
	320/85 R 20 (12.4 R 20)	119 A8/B		W 11	W 9 ; W 10	329	1052	467	3100	500	STD
22"	250/85 R 22 (9.5 R 22)	113 A8/B		W 8	W 7	251	985	453	2964	475	STD
	250/85 R 22	113 A8/B		W 8	W 7	251	985	453	2964	475	SPL
24"	250/85 R 24 (9.5 R 24)	109 A8/B		W 8	W 7 ; W 9	251	1036	475	3104	500	STD

STD: Standard - SPL: Special - IMP: Implement



Radial



### Performance





Radial

R-1W

D

176

# AGRIMAX RT 855

RADIAL TRACTOR TIRES



AGRIMAX RT 855 provides excellent traction and comfort properties. Mainly designed for soil tillage and both field and road transport, some sizes are also suitable for spraying, and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

### Performance



Traction



Self-Cleaning



High Load Capacity





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 24"	250/85 R 24 (9.5 R 24)	109 A8/B	W 8	W 7 ; W 9	251	1036	475	3104	500	SPL
	280/85 R 24 (11.2 R 24)	115 A8/B	W 10	W 9	292	1086	492	3224	525	STD
	280/85 R 24 (11.2 R 24)	115 A8/B	W 10	W 9	292	1086	492	3224	525	SPL
	320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 9 ; W 10	329	1154	519	3424	550	STD
	320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 9 ; W 10	329	1154	519	3424	550	SPL
	340/85 R 24 (13.6 R 24)	125 A8/B	W 12	W 11	353	1188	531	3540	575	STD
	340/85 R 24 (13.6 R 24)	125 A8/B	W 12	W 11	353	1188	531	3540	575	SPL
	380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 11 ; W 13	380	1256	554	3720	600	STD
	380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 11 ; W 13	380	1256	554	3720	600	SPL
	420/85 R 24 (16.9 R 24)	137 A8/B	W 15 L	W 14 L ; W 13	450	1324	582	3900	625	STD
420/85 R 24 (16.9 R 24)	137 A8/B	W 15 L	W 14 L ; W 13	450	1324	582	3900	625	SPL	
Ø 28"	250/85 R 28 (9.5 R 28)	112 A8/B	W 8	W 7 ; W 9	251	1137	519	3421	550	STD
	250/85 R 28 (9.5 R 28)	112 A8/B	W 8	W 7 ; W 9	251	1137	519	3421	550	SPL
	280/85 R 28 (11.2 R 28)	118 A8/B	W 10	W 9	292	1187	545	3558	575	STD
	280/85 R 28 (11.2 R 28)	118 A8/B	W 10	W 9	292	1187	545	3558	575	SPL

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 28"	<b>320/85 R 28 (12.4 R 28)</b>	124 A8/B	W 11	W 9 ; W 10	329	1255	569	3743	600	STD
	<b>320/85 R 28 (12.4 R 28)</b>	124 A8/B	W 11	W 9 ; W 10	329	1255	569	3743	600	SPL
	<b>340/85 R 28 (13.6 R 28)</b>	127 A8/B	W 12	W 11	353	1289	588	3890	625	STD
	<b>340/85 R 28 (13.6 R 28)</b>	139 A8/B	W 12	W 11	353	1315	603	3963	625	STD
	<b>340/85 R 28 (13.6 R 28)</b>	127 A8/B	W 12	W 11	353	1289	588	3890	625	SPL
	<b>380/85 R 28 (14.9 R 28)</b>	133 A8/B	W 12	W 11 ; W 13	380	1357	606	4015	650	STD
	<b>380/85 R 28 (14.9 R 28)</b>	133 A8/B	W 12	W 11 ; W 13	380	1357	606	4015	650	SPL
	<b>420/85 R 28 (16.9 R 28)</b>	139 A8/B	W 15 L	W 13 ; W 14 L	438	1425	638	4241	675	STD
	<b>420/85 R 28 (16.9 R 28)</b>	139 A8/B	W 15 L	W 13 ; W 14 L	438	1425	638	4241	675	SPL
Ø 30"	<b>380/85 R 30 (14.9 R 30)</b>	135 A8/B	W 12	W 11 ; W 13	380	1408	633	4190	675	STD
	<b>380/85 R 30 (14.9 R 30)</b>	135 A8/B	W 12	W 11 ; W 13	380	1408	633	4190	675	SPL
	<b>420/85 R 30 (16.9 R 30)</b>	140 A8/B	W 15 L	W 13 ; W 14 L	438	1475	661	4421	700	STD
	<b>420/85 R 30 (16.9 R 30)</b>	140 A8/B	W 15 L	W 13 ; W 14 L	438	1475	661	4421	700	SPL
	<b>460/85 R 30 (18.4 R 30)</b>	145 A8/B	W 16 L	W 14 L ; W 15 L	475	1544	680	4562	725	STD
	<b>460/85 R 30 (18.4 R 30)</b>	156 A8/B	W 16 L	W 14 L ; W 15 L	475	1544	680	4562	725	STD

STD: Standard - SPL: Special





Radial

R-1W

D

176

# AGRIMAX RT 855

RADIAL TRACTOR TIRES



AGRIMAX RT 855 provides excellent traction and comfort properties. Mainly designed for soil tillage and both field and road transport, some sizes are also suitable for spraying, and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

### Performance



Traction



Self-Cleaning



High Load Capacity





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 30"	460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 14 L ; W 15 L	475	1544	680	4562	725	SPL
Ø 32"	320/85 R 32 (12.4 R 32)	126 A8/B	W 11	W 9 ; W 10	329	1357	621	4081	650	STD
	320/85 R 32 (12.4 R 32)	126 A8/B	W 11	W 9 ; W 10	329	1357	621	4081	650	SPL
Ø 34"	320/85 R 34 (12.4 R 34)	141 A8/B	W 11	W 9 ; W 10	329	1408	645	4280	675	STD
	320/85 R 34 (12.4 R 34)	141 A8/B	W 11	W 9 ; W 10	329	1408	645	4280	675	SPL
	380/85 R 34 (14.9 R 34)	137 A8/B	W 12	W 11 ; W 13	380	1509	682	4504	725	STD
	380/85 R 34 (14.9 R 34)	137 A8/B	W 12	W 11 ; W 13	380	1509	682	4504	725	SPL
	420/85 R 34 (16.9 R 34)	147 A8/B	W 15 L	W 13 ; W 14 L	438	1578	728	4782	750	STD
	420/85 R 34 (16.9 R 34)	142 A8/B	W 15 L	W 13 ; W 14 L	438	1578	709	4702	750	STD
	420/85 R 34 (16.9 R 34)	142 A8/B	W 15 L	W 13 ; W 14 L	438	1578	709	4702	750	SPL
	460/85 R 34 (18.4 R 34)	147 A8/B	W 16 L	W 14 ; W 15 L	475	1646	721	4865	775	STD
	460/85 R 34 (18.4 R 34)	158 A8/B	W 16 L	W 14 L ; W 15 L	475	1646	721	4865	775	STD
	460/85 R 34 (18.4 R 34)	147 A8/B	W 16 L	W 14 L ; W 15 L	475	1646	721	4865	775	SPL
Ø 36"	320/85 R 36	147 D/150 A8	W 11	W 9 ; W 10	329	1458	672	4404	700	STD
	320/85 R 36 (12.4 R 36)	128 A8/B	W 11	W 9 ; W 10	329	1458	672	4404	700	STD

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 36"	<b>320/85 R 36</b> (12.4 R 36)	128 A8/B	W 11	W 9 ; W 10	329	1458	672	4404	700	SPL
	<b>340/85 R 36</b> (13.6 R 36)	132 A8/B	W 12	W 11	353	1492	689	4507	725	STD
	<b>340/85 R 36</b> (13.6 R 36)	132 A8/B	W 12	W 11	353	1492	689	4507	725	SPL
Ø 38"	<b>320/85 R 38</b> (12.4 R 38)	143 A8/B	W 11	W 9 ; W 10 ; DW 10 ; DW 11	329	1509	700	4580	725	STD
	<b>320/85 R 38</b> (12.4 R 38)	143 A8/B	W 11	W 9 ; W 10 ; DW 10	329	1509	700	4580	725	SPL
	<b>340/85 R 38</b> (13.6 R 38)	133 A8/B	W 12	W 11	353	1543	712	4668	750	STD
	<b>340/85 R 38</b> (13.6 R 38)	133 A8/B	W 12	W 11	353	1543	712	4668	750	SPL
	<b>380/85 R 38</b> (14.9 R 38)	139 A8/B	W 12	W 11 ; W 13	380	1611	736	4842	775	STD
	<b>380/85 R 38</b> (14.9 R 38)	139 A8/B	W 12	W 11 ; W 13	380	1611	736	4842	775	SPL
	<b>420/85 R 38</b> (16.9 R 38)	144 A8/B	W 15 L	W 13 ; W 14 L	438	1679	763	5014	800	STD
	<b>420/85 R 38</b> (16.9 R 38)	144 A8/B	W 15 L	W 13 ; W 14 L	438	1679	763	5014	800	SPL
	<b>460/85 R 38</b> (18.4 R 38)	149 A8/B	W 16 L	W 14 L ; W 15 L	475	1747	785	5205	825	STD
	<b>460/85 R 38</b> (18.4 R 38)	149 A8/B	W 16 L	W 14 L ; W 15 L	475	1747	785	5205	825	SPL
	<b>480/80 R 38</b> (18.4 R 38)	149 A8/B	DW 16 L	W 14 L ; W 15 L	475	1747	785	5161	825	STD
	<b>520/85 R 38</b> (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5466	875	STD

STD: Standard - SPL: Special





Radial



# AGRIMAX RT 855

RADIAL TRACTOR TIRES



AGRIMAX RT 855 provides excellent traction and comfort properties. Mainly designed for soil tillage and both field and road transport, some sizes are also suitable for spraying, and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.

### Performance



Traction



Self-Cleaning



High Load Capacity





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 38"	520/85 R 38 (20.8 R 38)	170 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	847	5595	875	STD
	520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	813	5466	875	SPL
	520/85 R 38	170 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	847	5595	875	SPL
Ø 42"	480/80 R 42 (18.4 R 42)	151 A8/B	W 16 A ; DD 16 ; DW 16 A	DD 16 L ; DW 16 L ; W 16 L	479	1835	835	5495	875	STD
	520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 L ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	STD
	520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 L ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	STD
	520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 L ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	SPL
	520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 L ; W 16 A ; DD 16	DW 18 A ; DD 18 ; W 18 A ; DD 18 L	516	1951	858	5782	925	SPL
Ø 46"	420/80 R 46 (16.9 R 46)	159 D/ 170 A2	W 13	W 12	418	1840	863	5641	900	STD
	420/80 R 46 (16.9 R 46)	151 D/ 162 A2	W 13	W 12	418	1840	863	5641	900	STD
	420/80 R 46 (16.9 R 46)	159 D/ 170 A2	W 13	W 12	418	1840	863	5641	900	SPL
	480/80 R 46 (18.4 R 46)	158 A8/B	DW 16 A ; W 16 A ; DD 16	W 16 L ; DD 16 L ; DW 16 L	479	1936	895	5871	925	STD
	480/80 R 46 (18.4 R 46)	164 A8/B	DW 16 A ; W 16 A ; DD 16	W 16 L ; DD 16 L ; DW 16 L	479	1936	895	5871	925	STD
	520/85 R 46 (20.8 R 46)	158 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2052	930	6157	975	STD
	520/85 R 46 (20.8 R 46)	173 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2075	964	6310	975	STD

STD: Standard - SPL: Special



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
<b>Ø 46"</b>	<b>520/85 R 46</b>	158 A8/B	DW 16 L ; W 16 A ; W 16 L ; DD 16	DW 18 L ; W 18 L ; W 18 A	516	2052	930	6157	975	SPL
<b>Ø 50"</b>	<b>420/80 R 50 (16.9 R 50)</b>	165 A8/B	W 13	W 12	418	1951	915	5955	950	SB
	<b>480/80 R 50 (18.4 R 50)</b>	159 A8/B	DW 16 L	DW 15 L ; W 15 L	489	2036	941	6183	975	STD
	<b>480/80 R 50 (18.4 R 50)</b>	176 A8	DW 16 L	DW 15 L ; W 15 L	489	2036	945	6183	975	SB
	<b>520/85 R 50 (20.8 R 50)</b>	165 A8/B	DW 16 L	DW 18 L	516	2154	992	6472	1025	STD

STD: Standard - SB: Steel Belted - SPL: Special





Radial

R-1W

D

160

# AGRIMAX RT 945

RADIAL TRACTOR TIRES



AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. Its strong carcass gives the tire excellent stability, outstanding traction, and exceptional durability.

### Technologies



Strong Casing

### Performance



High Load Capacity



Durability



Stability



Self-Cleaning



Traction



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 30"	420/90 R 30	147 A8/B	DW 13	W 14 L	418	1518	684	4571	700	STD
Ø 42"	320/90 R 42 (12.4 R 42)	139 A8/B	W 10	W 9 ; W 11	319	1643	760	4944	775	STD
Ø 46"	320/90 R 46 (12.4 R 46)	146 A8/B	W 10	W 9 ; W 11	319	1744	810	5232	825	STD
	320/90 R 46 (12.4 R 46)	148 D/151 A8	W 10	W 9 ; W 11	319	1744	810	5232	825	STD
	380/90 R 46 (14.9 R 46)	155 A8/B	W 12	W 11 ; W 13	380	1852	866	5648	875	STD
	380/90 R 46 (14.9 R 46)	159 A8/B	W 12	W 11 ; W 13	380	1852	859	5699	875	STD
Ø 50"	320/90 R 50 (12.4 R 50)	150 A8/B	W 10	W 9 ; W 11	319	1846	873	5618	875	STD
	380/90 R 50 (14.9 R 50)	151 A8/B	W 12	W 11 ; W 13	380	1954	906	5900	925	STD
	380/90 R 50 (14.9 R 50)	160 A8/B	W 12	W 11 ; W 13	390	1954	921	5958	925	STD
Ø 54"	320/90 R 54 (12.4 R 54)	156 A8/B	W 10	W 9 ; W 11	319	1948	930	6021	925	STD
	380/90 R 54 (14.9 R 54)	158 A8/B	W 12	W 11 ; W 13	380	2056	962	6232	975	STD

STD: Standard



# AGRIMAX ELOS

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 28"	420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13 ; W 14 L	438	1467	665	4349	675	STD
Ø 34"	480/70 R 34	155 A8/155 B	W 15 L	W 16 L ; W 14 L	500	1605	733	4868	750	STD
Ø 38"	340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1602	735	4774	750	STD
	380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11 ; W 13	380	1662	772	4994	775	STD
	420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13 ; W 14 L	438	1735	785	5135	800	STD
	480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 15 L ; DW 16 L	489	1803	821	5356	825	STD
	710/70 R 38	178 A8/B	DW 23 B	DW 25 B	716	2019	915	6103	925	STD
Ø 42"	480/80 R 42 (18.4 R 42)	151 A8/B	DW 16 L	DD 16 L ; W 16 L	489	1890	857	5629	875	STD
	520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 L	DD 18 L ; DW 18 L	516	1988	904	5865	925	STD
	520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 L	DD 18 L ; DW 18 L	516	1988	920	6095	925	STD
Ø 46"	520/85 R 46	169 A8/169 B	DW 16 L	DW 15 L ; DW 18 L ; W 15 L ; W 16 L ; W 18 L ; DD 16 L ; DD 18 L	530	2075	957	6293	975	STD

STD: Standard



Radial



Technologies



Extra Deep Tread

Performance



For muddy ground



Traction



Self-Cleaning



Radial

R-1

D

154

Technologies



Strong Casing

Performance



High Load Capacity



Durability



Stability



Self-Cleaning



Traction



# AGRIMAX RT 955



RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying and vineyards. The special tread design with a rounded shoulder provides excellent traction performance, stability and self-cleaning properties. Thanks to its strong casing, AGRIMAX RT 955 has a high load capacity.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 24"	210/90 R 24 (8.3 R 24)	107 A8/B	W 7	W 6	214	1010	462	3027	475	STD
Ø 28"	210/95 R 28 (8.3 R 28)	116 A8/B	W 7	W 6	214	1111	513	3364	525	STD
Ø 32"	210/95 R 32 (8.3 R 32)	120 A8/B	W 7	W 6	214	1213	571	3703	575	STD
	230/95 R 32 (9.5 R 32)	128 A8/B	W 7	W 8	228	1251	585	3810	600	STD
	270/95 R 32 (11.2 R 32)	136 A8/B	W 9	W 8 ; W 10	275	1327	614	4076	625	STD
Ø 36"	230/95 R 36 (9.5 R 36)	130 A8/B	W 7	W 8	228	1352	639	4112	650	STD
	270/80 R 36	134 A8/B	W 9	W 8 ; W 10	275	1346	629	4090	650	STD
	270/95 R 36 (11.2 R 36)	139 A8/B	W 9	W 8 ; W 10	275	1428	665	4335	675	STD
Ø 38"	270/95 R 38 (11.2 R 38)	140 A8/B	W 9	W 8 ; W 10	275	1479	697	4510	700	STD
Ø 40"	230/95 R 40 (9.5 R 40)	132 A8/B	W 7	W 8	228	1454	690	4445	700	STD
Ø 42"	230/95 R 42 (9.5 R 42)	133 A8/B	W 7	W 8	228	1506	714	4595	725	STD
	300/85 R 42 (11.2 R 42)	144 A8/B	W 9	W 10 ; W 11	295	1577	745	4850	750	STD
Ø 44"	210/95 R 44 (8.3 R 44)	120 A8/B	W 7	W 6	214	1518	721	4653	725	STD

STD: Standard



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 44"	<b>230/95 R 44</b> (9.5 R 44)	134 A8/B	W 7	W 8	228	1556	739	4788	750	STD
	<b>270/95 R 44</b> (11.2 R 44)	142 A8/B	W 9	W 8 ; W 10	275	1632	764	4983	775	STD
Ø 46"	<b>270/95 R 46</b> (11.2 R 46)	143 A8/B	W 9	W 8 ; W 10	275	1683	792	5169	800	STD
	<b>300/95 R 46</b> (12.4 R 46)	148 A8/B	W 9	W 10 ; W 11 ; DW 10 ; DW 11	295	1738	812	5318	825	STD
	<b>300/95 R 46</b> (12.4 R 46)	148 D/ 151 A8	W 9	W 10 ; W 11 ; DW 10 ; DW 11	295	1738	812	5318	825	STD
	<b>340/85 R 46</b> (13.6 R 46)	150 A8/B	W 12	W 11	353	1746	826	5346	850	STD
Ø 48"	<b>230/95 R 48</b> (9.5 R 48)	136 A8/B	W 7	W 8	228	1656	792	5085	800	STD
	<b>230/95 R 48</b> (9.5 R 48)	136 D/ 139 A8	W 7	W 8	228	1656	792	5085	800	STD
	<b>270/95 R 48</b> (11.2 R 48)	144 A8/B	W 9	W 8 ; W 10	275	1733	820	5351	825	STD
	<b>340/85 R 48</b> (13.6 R 48)	152 A8/B	W 12	W 11	353	1797	855	5572	875	STD
	<b>340/85 R 48</b> (13.6 R 48)	151 D/ 154 A8	W 12	W 11	353	1797	855	5572	875	STD
Ø 52"	<b>300/95 R 52</b> (12.4 R 52)	151 A8/B	W 9	W 10 ; W 11 ; DW 10 ; DW 11	295	1891	889	5774	900	STD
Ø 54"	<b>270/95 R 54</b> (11.2 R 54)	146 A8/B	W 9	W 8 ; W 10	275	1885	894	5815	900	STD

STD: Standard



Radial

R-1W



B



149

# AGRIMAX TURF RT 333

RADIAL TRACTOR TIRES



AGRIMAX TURF RT 333 (R-3+) is a radial tire designed for small tractors in gardening, vineyards and orchards applications. Its rounded shoulder design provides low soil compaction and makes it extremely delicate on the ground. Its unique extra-deep tread (R-3+) and the special design with directional blocks stand for excellent traction both in the field and on the road, and an extended tire life cycle. AGRIMAX TURF RT 333 (R-3+) ensures great self-cleaning properties and thanks to its low rolling resistance, allows for significant fuel saving.

### Technologies



Extra Deep Tread



Block Pattern

### Performance



Durability



Reduced Soil Compaction



Traction



Self-Cleaning





Low Rolling Resistance

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 12"	220/55 R 12	82 A8/B	7	-	221	550	249	1645	260	STD
	240/60 R 12	89 A8/B	7	-	242	592	269	1777	-	STD
Ø 14"	215/65 R 14	90 A8/ 90 B	W 7	W 6	220	630	290	1906	310	STD
Ø 16"	200/65 R 16	94 A8/B	W 6	-	202	666	309	2000	320	STD
	200/70 R 16	94 A8/B	W 6	-	200	686	317	2054	330	STD
	240/70 R 16	104 A8/B	W 8	W 8 L; W 9	244	742	340	2213	350	STD
	260/70 R 16	109 A8/ 109 B	W 8	W 8 L; W 9	258	770	348	2287	370	STD
Ø 18"	280/70 R 16	112 A8/ 112 B	W 9	W 8; W 10	289	800	359	2371	380	STD
	280/70 R 18	114 A8/ 114 B	W 9	W 8; W 10	289	840	390	2550	400	STD
	320/65 R 18	109 A8/ 109 B	W 10	W 9; W 11	319	873	394	2591	425	STD
Ø 20"	300/70 R 20	110 A8/ 110 B	W 9	W 10	295	952	431	2826	450	STD
	320/70 R 20	113 A8/ 113 B	W 10	W 9; W 11	319	982	441	2916	475	STD
	380/70 R 20	122 A8/ 122 B	W 12	W 11; W 13	380	1082	486	3213	525	STD

STD: Standard



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 24"	360/70 R 24	122 A8/ 122 B	W 11	W 10 ; W 12	357	1152	518	3409	550	STD
	380/70 R 24	125 A8/ 125 B	W 12	W 11 ; W 13	380	1190	534	3538	550	STD
	420/70 R 24	130 A8/ 130 B	W 13	W 12 ; W 14 L	418	1248	557	3728	600	STD
	420/85 R 24	137 A8/ 137 B	W 15 L	DW 15 L ; DW 14 L	435	1324	594	3957	625	STD
Ø 28"	340/85 R 28	127 A8/ 127 B	W 12	W 11 ; DW 11 ; DW 12	370	1289	585	3874	625	STD
	480/70 R 28	140 A8/ 140 B	W 15 L	W 14 L ; W 16 L	479	1421	631	4228	675	STD
Ø 30"	480/70 R 30	141 A8/ 141 B	W 15 L	W 14 L ; W 16 L	479	1478	660	4396	700	STD
Ø 34"	480/70 R 34	149 A8/ 149 B	W 15 L	W 14 L ; W 16 L	490	1580	723	4785	750	STD

STD: Standard





Radial

R-1

B

119

Performance



Reduced Soil Compaction



Traction



High Load Capacity



# RT 851

RT 851 is a R-1 tire specially engineered for tractors in grassland applications. The special rounded lug design has been developed to reduce any damage to grassland and emerging crops as well as soil compaction. The strong nylon casing with rugged polyester belts provides extraordinary traction as well as increased load capacity.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 20"	14.9 L R 20 (375/75 R 20)	119 A8/B	W 13	W 11 ; W 12 ; W 14	378	1100	498	3286	525	STD



STD: Standard





# RT 853

RT 853 is a R-1 tire for tractors and vineyard harvesters in soil tillage and vineyard harvesting applications. It features great traction, load capacity and self-cleaning properties.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
<b>Ø 38"</b>	<b>480/80 R 38 (18.4 R 38)</b>	149 A8/B	W 16 L	W 15 L ; W 14 L	475	1747	793	5300	825	STD
	<b>520/85 R 38 (20.8 R 38)</b>	155 A8/B	DW 16 L	DW 18 L ; DD 16 L	516	1849	830	5592	875	STD

STD: Standard



Radial



## Performance



Traction



High Load Capacity



Self-Cleaning



Radial

R-1

A8/B

145

Technologies



Strong Casing



Special Compound

Performance



Cut and Chip Resistance



Durability



Traction



High Load Capacity



# RT 857

RT 857 is a tire designed for soil tillage applications. Its strong casing offers excellent durability and traction. The stubble-resistant tread compound features high cut-and-chip resistance.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 24"	320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 10 ; W 9	329	1154	528	3449	550	STD
	380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 13 ; W 11	380	1256	566	3783	600	STD
Ø 26"	420/85 R 26 (16.9 R 26)	138 A8/B	DW 15 L	W 14 L ; W 15 L ; W 16 L ; DW 16 L	450	1374	616	4115	650	STD
	460/85 R 26 (18.4 R 26)	143 A8/B	DW 15 L	W 15 L ; W 16 L ; DW 16 L	465	1442	642	4297	675	STD
Ø 28"	320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9 ; W 10	329	1255	577	3779	600	STD
	340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	599	3908	625	STD
	380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11 ; W 13	390	1357	617	4127	650	STD
	420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 14 L ; W 13	450	1425	640	4276	675	STD
Ø 30"	420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 14 L ; W 13	450	1476	656	4398	700	STD
	460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 15 L ; W 14 L	475	1544	697	4648	725	STD

STD: Standard







# RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design and a wide footprint that provides excellent grip for road applications. The tire is best suitable for transport and municipality/maintenance applications thanks to its high-speed feature and strong casing. The tread design has been specifically developed for heavy-duty services and ensures a low rolling resistance that provides fuel economy plus great stability.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 16"	240/70 R 16 IND	107 A8/107 B	W 8	W 9	244	742	343	2226	350	STD
Ø 18"	340/80 R 18 IND	143 A8/138 D	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC	343	1001	458	2980	475	STD
Ø 20"	360/80 R 20 IND	143 D/147 A8	11	W 10 ; W 11 ; 12 ; W 12	357	1084	488	3235	525	STD
Ø 24"	300/80 R 24 IND (11.2 R 24)	133 A8/128 D	DW 10	-	295	1090	501	3296	525	STD
	340/80 R 24 IND (12.4 R 24)	140 A8/135 D	DW 11	W 10 ; W 12 ; DW 10	343	1154	521	3444	550	STD
	360/80 R 24 IND (13.6 R 24)	143 A8/138 D	DW 11	W 12 ; W 10	343	1186	537	3556	575	STD
	400/80 R 24 IND (14.9 R 24)	149 A8/144 D	DW 13	W 12 ; W 14 L	404	1250	558	3760	600	STD
	420/65 R 24 IND	146 D/151 A8	DW 13 L ; W 13	DW 15 L ; DW 14 L	418	1158	530	3483	550	STD
	440/80 R 24 IND (16.9 R 24)	154 A8/149 D	DW 14 L	DW 15 L ; DW 13	441	1314	590	3939	625	STD
	460/65 R 24 IND	151 D/156 A8	DW 14 L	DW 15 L ; DW 13	455	1214	549	3644	600	STD
	500/70 R 24 IND	157 A8/152 D	DW 16 L	DW 15 L ; DW 18 L	503	1310	602	3954	625	STD
	500/70 R 24 IND	164 A8/159 D	DW 16 L	DW 15 L ; DW 18 L	503	1310	602	3954	625	STD
Ø 28"	400/80 R 28 IND (14.9 R 28)	151 A8/146 D	W 13	W 12 ; W 14 L	404	1352	615	4048	650	STD
	440/80 R 28 IND (16.9 R 28)	156 A8/151 D	W 14 L	W 15 L	441	1415	634	4288	675	STD

STD: Standard



Radial



D



173

### Technologies



High Speed



Strong Casing



Larger Footprint



Block Pattern

### Performance



Road Oriented



Durability



Stability



Fuel Economy



Heavy Duty





Radial



173



# RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design and a wide footprint that provides excellent grip for road applications. The tire is best suitable for transport and municipality/maintenance applications thanks to its high-speed feature and strong casing. The tread design has been specifically developed for heavy-duty services and ensures a low rolling resistance that provides fuel economy plus great stability.

### Technologies



High Speed



Strong Casing



Larger Footprint



Block Pattern

### Performance



Road Oriented



Durability



Stability



Fuel Economy



Heavy Duty

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 30"	440/80 R 30 IND (16.9 R 30)	157 A8/153 D	W 14 L	W 15 L	441	1466	668	4456	700	STD
	480/80 R 30 IND (18.4 R 30)	162 A8/157 D	W 15 L	W 16 L	479	1530	687	4577	725	STD
Ø 34"	440/80 R 34 IND (16.9 R 34)	159 A8/155 D	DW 14 L	DW 15 L ; DW 16 L	441	1567	704	4775	750	STD
	480/80 R 34 IND (18.4 R 34)	164 A8/159 D	W 15 L	W 16 L	479	1632	728	4894	775	STD
Ø 38"	480/80 R 38 IND (18.4 R 38)	166 A8/161 D	W 15 L	W 16 L	479	1733	780	5213	825	STD
	540/80 R 38 IND	172 A8/167 D	W 18 L	W 16 L	550	1829	833	5537	875	STD
Ø 42"	540/80 R 42 IND	168 D/173 A8	W 18 L	W 16 L	560	1931	879	5875	925	STD

STD: Standard







# RIDEMAX IT 697 (M+S)

RADIAL TRANSPORT TIRES

RIDEMAX IT 697 M+S represents the best response to the needs of modern farming contractors during winter operations. It is perfect for haulage and municipality applications. This winter tire for tractors ensures extraordinary grip for all operations on icy and snowy roads without the need of snow chains being mounted. Thanks to the tread grooves and the strong casing, a tractor can be driven in full stability, also at high speed levels. The tread design has been specially developed for heavy-duty services and ensures a low rolling resistance that provides fuel economy plus great stability.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 24"	460/70 R 24 IND	157 A8/152 D	DW 15 L	DW 14 L ; DW 16 L	465	1254	571	3772	600	STD
	540/70 R 24 IND	170 D/175 A8	DW 16 L	DW 18 L	535	1370	625	4181	650	STD
Ø 28"	480/65 R 28 IND	149 D/154 A8	DW 15 L	DW 14 L ; DW 16 L	480	1335	615	4088	650	STD
	540/65 R 28 IND	155 D/160 A8	W 16 L	W 18	530	1413	642	4276	675	STD
	600/65 R 28 IND	165 A8/160 D	W 18 L	DW 20 B	591	1491	684	4509	700	STD
Ø 30"	540/65 R 30 IND	156 D/161 A8	W 16 L	W 18	530	1464	672	4445	700	STD
	600/70 R 30 IND	166 D/171 A8	DW 18 L	DW 20 B	600	1600	688	4820	750	STD
Ø 38"	600/65 R 38 IND	166 D/170 A8	DW 18 L	DW 20 B	590	1745	795	5315	825	STD
	650/65 R 38 IND	170 D/175 A8	DW 20 B	DW 18 L	645	1811	823	5514	875	STD
	650/85 R 38 IND	178 D/183 A8	DW 23 B	DW 20 B ; DW 21 B	709	2071	974	6280	975	STD
	710/70 R 38 IND	177 D/182 A8	DW 23 B	DW 25 B	716	1959	900	5950	925	STD
Ø 42"	650/65 R 42 IND	171 D/176 A8	DW 20 B	DW 18 L	645	1920	880	5869	925	STD
	710/70 R 42 IND	180 D/185 A8	DW 23 B	-	716	2068	926	6264	975	STD

STD: Standard



Radial



185

### Technologies



High Speed



Strong Casing



Larger Footprint



Block Pattern

### Performance



Road Oriented



Ice and Snow



Durability



Stability



Fuel Economy



Heavy Duty



Radial



# AGRIMAX RT 600

RADIAL TRACTOR TIRES

AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spreading applications. Thanks to its large contact area, AGRIMAX RT 600 ensures an excellent pressure distribution on the land reducing damage on grassland and protecting your soil. Thanks to its round shoulder technology, the reinforced bead and increased number of lugs, it guarantees great stability and traction.

### Technologies



Reinforced Bead



Rounded Shoulder Technology



More Lugs

### Performance



Ideal for grassland



Stability



Traction

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 26"	620/75 R 26 (23.1 R 26)	167 A8/B	DW 20 B	-	625	1590	730	4851	750	STD
	750/65 R 26	171 A8/B	DW 24 B	DW 23 B ; DW 25 B	750	1636	737	4987	775	STD
	750/70 R 26	172 A8/B	DW 25 B	DW 24 B	780	1750	785	5269	825	STD
Ø 28"	540/65 R 28	142 D/145 A8	W 16 L	W 18 L	530	1413	642	4202	675	STD
Ø 32"	650/75 R 32	172 A8/B	DW 21 B	DW 20 B ; DW 23 B	655	1789	807	5416	850	STD
	800/65 R 32 (30.5 L R 32)	176 A8/173 B	DW 27 B	DH 27 B ; DW 25 B	775	1820	823	5558	875	STD
	800/65 R 32 (30.5 L R 32)	181 A8/178 B	DW 27 B	DH 27 B ; DW 25 B	775	1820	823	5558	875	STD
	900/60 R 32	181 A8/178 B	DW 27 B	DW 28 B ; DW 30 B	896	1893	841	5697	900	STD
	1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1863	826	5700	875	STD
	IF 680/85 R 32 CFO	179 D	DW 23 B	DW 21 B	682	1960	846	5860	925	STD
	IF 1250/50 R 32 CFO	201 B	DH 44 B/1.3 (multipiece)	-	1247	2063	897	6136	975	SB
	IF 1250/50 R 32 CFO	201 B	VA 44/1.7 (multipiece)	-	1247	2063	897	6136	975	SB
Ø 34"	IF 710/75 R 34 CFO	184 A8/B	DW 25 B	DW 23 B	715	1920	856	5771	900	SB
Ø 38"	650/65 R 38	157 D/160 A8	DW 20 B	-	645	1811	833	5443	875	STD
	710/70 R 38	178 D/181 A8	DW 23 B	DW 25 B	706	1959	881	5926	925	STD

STD: Standard - SB: Steel Belted



# TRAC SUPER

TRAC SUPER is the first radial tire introduced in BKT's municipality segment. The steel-belted tire structure ensures an excellent smooth drive combined with best traction performance. As a result, it is particularly suitable for applications on large lawn surfaces such as parks and roadsides.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 15"	400/50 R 15	118 A8	13.00	-	380	775	329	2269	370	STD
Ø 17"	440/50 R 17	135 D	14.00	13.00	441	872	395	2674	410	STD
	500/50 R 17	147 D	16.00	-	490	940	425	2850	450	STD

STD: Standard



Radial



147

## Technologies



Steel Belted

## Performance



Stability



Traction



Radial



185



# AGRIMAX TERIS

RADIAL TRACTOR TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations. Excellent traction properties and high load capacity are its essential features providing best performance in all harvesting operations. The special sidewall protection and a reinforced shoulder increase resistance – thus extending the product life-cycle – also in harsh conditions and if there are stubbles in the fields.

### Technologies



Reinforced Shoulder



Special Compound



Reinforced Bead

### Performance



Traction



High Load Capacity



High Puncture Resistance



Stability





Handling and Comfort

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 26"	620/75 R 26 CHO	166 A8/B	DW 20 B	-	625	1590	730	4851	750	STD
	750/65 R 26 CHO (28 L R 26)	166 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
	750/65 R 26 CHO (28 L R 26)	171 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD
Ø 28"	710/55 R 28 CHO	164 A8/B	DW 23 B	-	716	1493	663	4442	700	STD
Ø 30"	620/75 R 30 CHO	168 A8/B	DW 20 B	-	625	1692	779	5169	800	STD
Ø 32"	650/75 R 32 CHO	172 A8/B	DW 21 B	DW 20 B ; DW 23 B	670	1795	816	5378	850	STD
	IF 710/75 R 32 CFO	183 A8/B	DW 25 B	DW 23 B	716	1879	851	5653	875	STD
	800/65 R 32 CHO (30.5 L R 32)	178 A8/175 B	DW 27 B	DW 25 B ; DH 27 B	818	1853	838	5551	875	STD
	900/60 R 32 CHO	181 A8/178 B	DW 27 B	DW 28 B ; DW 30 B	886	1910	854	5700	900	STD
	900/60 R 32 CHO	185 A8/182 B	DW 27 B	DW 28 B ; DW 30 B	875	1910	875	5775	900	STD
	1050/50 R 32 CHO	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	STD
	1050/50 R 32 CHO	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	HD

STD: Standard



	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 34"	IF 580/80 R 34 CFO	177 D	DW 20 B ; DW 20 A	DW 21 A ; DW 21 B	586	1792	810	5422	850	STD
	IF 710/75 R 34 CFO	184 A8/B	DW 25 B	-	716	1930	870	5852	900	STD
Ø 42"	520/85 R 42	168 D	DW 16 L	W 15 L ; DW 15 L ; DD 16 L ; W 16 L ; DD 18 L ; DW 18 L ; W 18 L	516	1951	890	5851	925	STD

STD: Standard





Radial



# FL 635

FL 635 is a radial flotation tire suitable for both road and field usage. The special block pattern has been designed for hay baler applications. FL 635 ensures a great pressure distribution on the ground across the footprint and drastically reduces soil compaction to preserve the value of the crops. The tire ensures great self-cleaning properties, durability and traction along with excellent speed features.

### Technologies



Reinforced Bead



High Speed

### Performance



Reduced Soil Compaction



Traction



Self-Cleaning



Durability

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 22.5"	500/45 R 22.5	136 D	AG 16.00	-	490	1022	461	3086	500	STD
	620/40 R 22.5	154 D	AG 20.00	-	625	1068	470	3249	500	STD
	650/55 R 22.5	167 D	AG 20.00	-	645	1287	568	3901	600	STD
	710/40 R 22.5	161 D	AG 24.00	-	727	1140	510	3467	550	STD
	750/45 R 22.5	168 D	AG 24.00	-	754	1247	555	3810	600	STD



STD: Standard





# RM 500

RM 500 is a steel-belted radial tire suitable for harvester implement applications. It features a strong casing and a special tread design providing high load capacity and particular cut-and-chip resistance. Thanks to its large footprint, RM 500 ensures great pressure distribution on the ground with reduced soil compaction in addition to excellent traction.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 24"	500/70 R 24	167 A8/155 A8	W 16 L	W 15 L	502	1310	572	3907	625	SB
	500/85 R 24	182 A8/170 A8	W 16 L	W 15 L	520	1460	622	4382	700	SB
	500/85 R 24	182 A8/170 A8	W 16 L	W 15 L	520	1460	622	4382	700	SB
Ø 28"	500/80 R 28	176 A8/164 A8	W 16 L	W 15 L	503	1495	635	4355	700	SB
	600/65 R 28	168 A8/156 A8	W 18 L	W 20 L	590	1486	640	4340	700	SB
	600/65 R 28	177 A8/165 A8	W 18 L	W 20 L	590	1486	640	4340	700	SB
Ø 30"	500/85 R 30	176 A8/164 A8	W 16 L	W 15 L	535	1610	674	4745	775	SB

SB: Steel Belted



Radial



A8



182

### Technologies



Steel Belted

### Performance



High Load Capacity



Stability



Traction



High Puncture Resistance



# Load index

The load index is a code that defines a tire's maximum weight capacity at the speed given by its speed index provided that the usage conditions recommended by the Manufacturer are fully complied with.

## Corresponding values of load index (LI) and load capacity per wheel (kg / lbs)

LI	lbs	kg	LI	lbs	kg	LI	lbs	kg	LI	lbs	kg
50	420	190	85	1135	515	120	3085	1400	155	8540	3875
51	430	195	86	1170	530	121	3195	1450	156	8820	4000
52	440	200	87	1200	545	122	3305	1500	157	9095	4125
53	455	206	88	1235	560	123	3415	1550	158	9370	4250
54	465	212	89	1280	580	124	3525	1600	159	9645	4375
55	480	218	90	1325	600	125	3635	1650	160	9920	4500
56	495	224	91	1355	615	126	3750	1700	161	10195	4625
57	505	230	92	1390	630	127	3860	1750	162	10470	4750
58	520	236	93	1435	650	128	3970	1800	163	10745	4875
59	535	243	94	1475	670	129	4080	1850	164	11025	5000
60	550	250	95	1520	690	130	4190	1900	165	11355	5150
61	565	257	96	1565	710	131	4300	1950	166	11685	5300
62	585	265	97	1610	730	132	4410	2000	167	12015	5450
63	600	272	98	1655	750	133	4540	2060	168	12345	5600
64	615	280	99	1710	775	134	4675	2120	169	12785	5800
65	640	290	100	1765	800	135	4805	2180	170	13225	6000
66	660	300	101	1820	825	136	4940	2240	171	13560	6150
67	675	307	102	1875	850	137	5070	2300	172	13890	6300
68	695	315	103	1930	875	138	5205	2360	173	14330	6500
69	715	325	104	1985	900	139	5355	2430	174	14770	6700
70	740	335	105	2040	925	140	5510	2500	175	15210	6900
71	760	345	106	2095	950	141	5675	2575	176	15650	7100
72	785	355	107	2150	975	142	5840	2650	177	16095	7300
73	805	365	108	2205	1000	143	6005	2725	178	16535	7500
74	825	375	109	2270	1030	144	6175	2800	179	17085	7750
75	855	387	110	2335	1060	145	6395	2900	180	17635	8000
76	880	400	111	2405	1090	146	6615	3000	181	18185	8250
77	910	412	112	2470	1120	147	6780	3075	182	18740	8500
78	935	425	113	2535	1150	148	6945	3150	183	19290	8750
79	965	437	114	2600	1180	149	7165	3250	184	19840	9000
80	990	450	115	2680	1215	150	7385	3350	185	20390	9250
81	1020	462	116	2755	1250	151	7605	3450	186	20945	9500
82	1045	475	117	2835	1285	152	7825	3550	187	21495	9750
83	1075	487	118	2910	1320	153	8045	3650	188	22045	10000
84	1100	500	119	3000	1360	154	8265	3750	189	22705	10300

LI	lbs	kg	LI	lbs	kg	LI	lbs	kg
190	23370	10600	200	30865	14000	210	41885	19000
191	24030	10900	201	31965	14500	211	42990	19500
192	24690	11200	202	33070	15000	212	44090	20000
193	25350	11500	203	34170	15500	213	45415	20600
194	26015	11800	204	35270	16000	214	46735	21200
195	26785	12150	205	36375	16500	215	48060	21800
196	27555	12500	206	37475	17000	216	49380	22400
197	28330	12850	207	38580	17500	217	50705	23000
198	29100	13200	208	39680	18000	218	52025	23600
199	29980	13600	209	40785	18500	219	53570	24300

## Speed index

The speed index is a value that indicates the maximum admitted speed at which the tire can carry the weight corresponding to its load index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Speed index	A2	A4	A6	A8	B	C	D	E	F	G	J	K
km/h	10	20	30	40	50	60	65	70	80	90	100	110
mph	5	10	20	25	30	35	40	45	50	55	62	68







## Corporate Office

**Balkrishna Industries Ltd.**

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India  
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

### **BKT Europe srl**

Viale Della Repubblica, 133  
20831 Seregno (MB), Italy  
Tel: (+39) 0362 33 03 28  
(+39) 0362 32 51 07  
Fax: (+39) 0362 23 24 72

### **BKT USA Inc.**

202 Montrose West Ave. Suite 240  
Tel: (+1) 330 836 1090  
Fax: (+1) 330 836 1091

### **BKT Tires (CANADA) Inc.**

55 York Street, Suite 401  
Toronto, Ontario M5J 1R7, Canada  
Tel: AG/IND (+1) 514 792 9220  
OTR (+1) 780 888 5667  
Fax: (+1) 416 229 1711



**bkt-tires.com**