

KENDA

P O W E R S P O R T S





Kenda is a name people trust; from wheels on baby strollers to tires on heavy equipment, Kenda is meeting the needs of millions of people worldwide. Since 1962, Kenda has been offering high-quality rubber products for cars, light trucks, bicycles, motorcycles, ATVs, trailers, karts, golf cars, lawn and garden, wheelchairs, and skid loader/agricultural vehicles. Operating in Asia, North America, and Europe, Kenda distributes its products in over 150 countries and employs more than 10,000 people. Kenda was named 'one' of the world's largest tire manufacturers.

All seven of our factories have achieved ISO 9001 certification; even so, Kenda has continually upgraded its manufacturing equipment in order to improve production efficiency so we may offer the most cost competitive products and pass the savings on to consumers. At Kenda, we understand that only the best performance will yield the highest efficiencies and keep us in the forefront of today's competitive market.

INDEX

STREET

P01

OFF-ROAD

P15

**LIGHTWEIGHT /
MOPED / SCOOTER**

P29

ATV / UTV

P73

TUBES

P87

FACTORY LOCATION ITEMS

P88

INFORMATION

P97

**TIRE LOAD INDEX &
SPEED SYMBOL TABLE**

P98



KM1

- State-of-the-art construction and advanced rubber compound technology combine to create Kenda's first sport-touring radial.
- Optimized apex geometry delivers perfect balance of high-speed stability and lightning fast turn-in.
- Proprietary compound reaches target operating temperature faster than competitors.
- Excellent wet grip and increased siping combine to provide ultimate confidence in adverse conditions.
- Long-wearing compound promises more miles without sacrificing performance.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
110/70R17	54H	TL	4.3 / 110	23.1 / 586	467 / 212	42 / 2.9	3.00X17	*	*
120/60ZR17	(55W)	TL	4.8 / 122	22.7 / 576	481 / 218	42 / 2.9	3.50X17	*	*
120/70ZR17	(58W)	TL	4.9 / 125	23.6 / 600	520 / 236	42 / 2.9	3.50X17	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
140/70R17	66H	TL	5.5 / 139	24.7 / 628	661 / 300	42 / 2.9	3.75X17	*	*
150/60R17	66H	TL	5.9 / 151	24.1 / 612	661 / 300	42 / 2.9	4.25X17	*	*
160/60ZR17	(69W)	TL	6.3 / 161	24.6 / 624	716 / 325	42 / 2.9	4.50X17	*	*
180/55ZR17	(73W)	TL	7.0 / 178	24.8 / 630	805 / 365	42 / 2.9	5.50X17	*	*
190/50ZR17	(73W)	TL	7.48 / 190	24.8 / 630	805 / 365	42 / 2.9	6.00X17	*	*
190/55ZR17	(75W)	TL	7.48 / 190	25.3 / 642	853 / 387	42 / 2.9	6.00X17	*	*





KR20 KANINE

- First and only aftermarket tire designed specifically for the Can-Am Spyder and Harley-Davidson Trike.
- Greater mileage than stock, better handling than passenger car replacements.
- Performance pattern reduces rolling resistance while keeping maximum lateral traction.
- Engineered with increased siping to evacuate standing water for excellent wet weather performance.
- MC-spec, DOT, and E-Mark approved.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
165/55R15	55H	TL	6.5 / 165	22.5 / 573	481 / 218	44 / 3.1	5.00X15	*	*
145/60R16	66T	TL	5.9 / 150	22.8 / 580	661 / 300	44 / 3.1	4.50X16	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
205/55R15	81T	TL	8.5 / 217	24.0 / 610	1019 / 462	44 / 3.1	6.50X15	*	*
225/50R15	76H	TL	8.9 / 228	24.0 / 611	882 / 400	44 / 3.1	7.00X15	*	*
K205/65R15	92T	TL	8.3 / 212	25.4 / 645	1389 / 630	44 / 3.1	5.50X15	*	*
205/45R16	77T	TL	8.1 / 206	23.2 / 590	908 / 412	44 / 3.1	6.50X16	*	*
K215/45R18	83T	TL	8.2 / 208	25.7 / 653	1074 / 487	44 / 3.1	7.00X18	*	*





GENERAL INFORMATION FOR STREET TIRES

- It is essential that you refer to your motorcycle manufacturer when buying and fitting replacement tires and/or tubes. Changes in tire size, model, construction and wheel assembly should not be made without consulting with the motorcycle or tire manufacturer, since fitting the wrong tire or tube may have an effect on handling, safety and wear.
- **Load Carrying Capacity:**
Carefully consider the weight of the motorcycle, the weight of any optional equipment, and whether it will carry a passenger. Remember, the load carrying capacity of tires is also reduced by underinflation. It is possible to overload a tire even if it is the correct size for the motorcycle.
- **Tire Pressure:**
Underinflated tires can result in imprecise cornering, higher running temperatures, irregular tread wear at the edge of the contact patch, fatigue, cracking, overstressing and eventually failure of the tire carcass.
- When new tires are fitted they should not be subjected to sudden acceleration, hard cornering, maximum power or unnecessary hard braking for at least 100 miles. Doing so may result in loss of control or serious injury. The 100-mile run-in is required to adjust to the feel of new tires versus worn tires.
- When fitting a new tire on a rim requiring a tube, a new tube and rim strip should be fitted at the same time. Always check the size marking and valve type on the new tube to ensure proper replacement fit. Old tubes can become stretched, increasing the chance of tube failure .

WARNING: Always refer to your motorcycle manufacturer for their recommended replacement tire to ensure you have chosen the correct tire. This tire may not be suitable for your motorcycle if it does not meet the manufacturer's required load carrying capacity.



K6318

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
120/80-16	4PR	60P	TT	4.7 / 119	23.5 / 598	551 / 250	33 / 2.3	2.75X16	*	*
100/80-17	4PR	52P	TT	4.0 / 101	23.3 / 592	441 / 200	33 / 2.3	2.50X17	*	*
130/80-17	4PR	65P	TT	5.1 / 129	25.2 / 640	639 / 290	33 / 2.3	3.00X17	*	*
130/70-18	4PR	63P	TT	5.1 / 129	25.1 / 639	600 / 272	33 / 2.3	3.50X18	*	*
90/90-19	4PR	52P	TT	3.5 / 90	25.4 / 645	441 / 200	33 / 2.3	2.15X19	*	*
100/90-19	4PR	57P	TT	4.0 / 101	26.1 / 663	507 / 230	33 / 2.3	2.50X19	*	*



K657 CHALLENGER

- Excellent choice for small displacement motorcycles.
- Tread pattern designed for all-weather riding.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-16	74H	TL	5.1 / 129	25.2 / 640	827 / 375	40 / 2.8	3.00X16	*	*
100/90-18	56H	TL	4.0 / 101	25.1 / 637	494 / 224	40 / 2.8	2.50X18	*	*
100/90-19	57H	TL	4.0 / 101	26.1 / 663	507 / 230	40 / 2.8	2.50X19	*	*
110/90-19	68H	TL	4.3 / 109	26.8 / 681	694 / 315	40 / 2.8	2.50X19	*	*
90/100-21	56H	TL	3.5 / 90	28.1 / 713	494 / 224	40 / 2.8	2.15X21	*	*

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-15	66H	TL	5.1 / 129	24.2 / 615	661 / 300	40 / 2.8	3.00X15	*	*
140/90-15	70H	TL	5.6 / 142	24.9 / 633	738 / 335	40 / 2.8	3.50X15	*	*
120/90-16	63H	TL	4.7 / 119	24.5 / 622	600 / 272	40 / 2.8	2.75X16	*	*
130/90-16	74H	TL	5.1 / 129	25.2 / 640	827 / 375	40 / 2.8	3.00X16	*	*
140/90-16	77H	TL	5.6 / 142	25.9 / 658	908 / 412	40 / 2.8	3.50X16	*	*
150/80-16	71H	TL	9.0 / 150	25.4 / 646	761 / 345	40 / 2.8	3.50X16	*	*
130/90-17	68H	TL	5.1 / 129	26.2 / 666	694 / 315	40 / 2.8	3.00X17	*	*
110/90-18	61H	TL	4.3 / 109	25.8 / 655	567 / 257	40 / 2.8	2.50X18	*	*
120/90-18	65H	TL	4.7 / 119	26.5 / 673	639 / 290	40 / 2.8	2.75X18	*	*
130/70-18	63H	TL	5.1 / 129	25.2 / 639	600 / 272	42 / 2.9	3.50X18	*	*
130/90-18	69H	TL	5.1 / 129	27.2 / 691	716 / 325	40 / 2.8	3.00X18	*	*



K671 CRUISER S/T

- One of the most popular choices on the market for heavy cruisers and tourers.
- Deep offset tread grooves for all-weather riding.
- Tubeless construction.
- DOT approved / H-rated.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-16	54H	TL	4.0 / 101	23.1 / 586	467 / 212	40 / 2.8	2.50X16	*	*
110/70-16	52P	TL	4.3 / 110	22.0 / 560	441 / 200	33 / 2.3	3.00X16	*	*
110/70-16	52S	TL	4.3 / 110	22.0 / 560	441 / 200	33 / 2.3	3.00X16	*	*
110/70-17	54H	TL	4.3 / 110	23.1 / 586	467 / 212	40 / 2.8	3.00X17	*	*
110/80-17	57P	TL	4.3 / 109	23.9 / 608	507 / 230	33 / 2.3	2.50X17	*	*
110/80-17	57H	TL	4.3 / 109	23.9 / 608	507 / 230	40 / 2.8	2.50X17	*	*
90/90-18	51H	TL	3.5 / 90	24.4 / 619	430 / 195	40 / 2.8	2.15X18	*	*
100/90-19	57H	TL	4.0 / 101	26.1 / 663	507 / 230	40 / 2.8	2.50X19	*	*

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-15	66H	TL	5.1 / 129	24.2 / 615	661 / 300	40 / 2.8	3.00X15	*	*
170/80-15	77H	TL	6.7 / 170	25.7 / 653	908 / 412	40 / 2.8	4.00X15	*	*
130/70-16	61S	TL	5.1 / 129	23.1 / 588	567 / 257	33 / 2.3	3.50X16	*	*
130/90-16	74H	TL	5.1 / 129	25.2 / 640	827 / 375	40 / 2.8	3.00X16	*	*
140/70-16	65P	TL	5.5 / 139	23.7 / 602	639 / 290	33 / 2.3	3.75X16	*	*
130/70-17	62H	TL	5.1 / 129	24.2 / 614	584 / 265	40 / 2.8	3.50X17	*	*
140/60-17	63H	TL	5.5 / 139	23.6 / 600	600 / 272	40 / 2.8	3.75X17	*	*
140/70-17	66P	TL	5.5 / 139	24.7 / 628	661 / 300	33 / 2.3	3.75X17	*	*
140/70-17	66H	TL	5.5 / 139	24.7 / 628	661 / 300	40 / 2.8	3.75X17	*	*
150/70-17	69H	TL	5.9 / 151	25.3 / 642	716 / 325	40 / 2.8	4.25X17	*	*
160/60-17	69H	TL	6.3 / 161	24.6 / 624	716 / 325	40 / 2.8	4.50X17	*	*
130/70-18	63H	TL	5.1 / 129	25.2 / 639	600 / 272	40 / 2.8	3.50X18	*	*
140/70-18	67H	TL	5.5 / 139	25.7 / 653	677 / 307	40 / 2.8	3.75X18	*	*





K673 KRUZ

- One of the most popular heavy cruiser / touring tires on the road today.
- Front and rear tread patterns designed for all-weather riding.
- Bias/belted casing design, for improved handling and high load carrying capacity.
- New rubber compound for improved mileage.

KENDA KRUZ

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
130/90-16	72H	TL	5.1 / 129	25.2 / 640	827 / 375	40 / 2.8	3.00X16	*	*
150/80-16	71H	TL	5.9 / 150	25.4 / 646	761 / 345	40 / 2.8	3.50X16	*	*
120/90-17	64H	TL	4.7 / 119	25.5 / 648	617 / 280	40 / 2.8	2.75X17	*	*
140/80-17	69H	TL	5.6 / 142	25.8 / 656	716 / 325	41 / 2.8	3.50X17	*	*
110/90-18	61H	TL	4.3 / 109	25.8 / 655	567 / 257	40 / 2.8	2.50X18	*	*
120/90-18	71H	TL	4.7 / 119	26.5 / 673	761 / 345	40 / 2.8	2.75X18	*	*
130/70-18	63H	TL	5.1 / 129	25.2 / 639	600 / 272	40 / 2.8	3.50X18	*	*
100/90-19	57H	TL	4.0 / 101	26.1 / 663	507 / 230	40 / 2.8	2.50X19	*	*
110/90-19	62H	TL	4.3 / 109	26.8 / 681	584 / 265	40 / 2.8	2.50X19	*	*
80/90-21	48H	TL	3.1 / 80	26.7 / 677	397 / 180	40 / 2.8	1.85X21	*	*


REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
140/90-15	70H	TL	5.6 / 142	24.9 / 633	738 / 335	40 / 2.8	3.50X15	*	*
150/90-15	74H	TL	5.9 / 150	25.6 / 651	827 / 375	40 / 2.8	3.50X15	*	*
170/80-15	77H	TL	6.7 / 170	25.7 / 653	908 / 412	40 / 2.8	4.00X15	*	*
130/90-16	74H	TL	5.1 / 129	25.2 / 640	827 / 375	40 / 2.8	3.00X16	*	*
140/90-16	77H	TL	5.6 / 142	25.9 / 658	908 / 412	40 / 2.8	3.50X16	*	*
150/80-16	71H	TL	5.9 / 150	25.4 / 646	761 / 345	40 / 2.8	3.50X16	*	*
160/80-16	75H	TL	6.4 / 162	26.1 / 662	853 / 387	40 / 2.8	4.00X16	*	*



CROSS SECTION OF THE KRUZ

A cross section of the Kenda **K673 KRUZ** shows the various components that make up its structure.

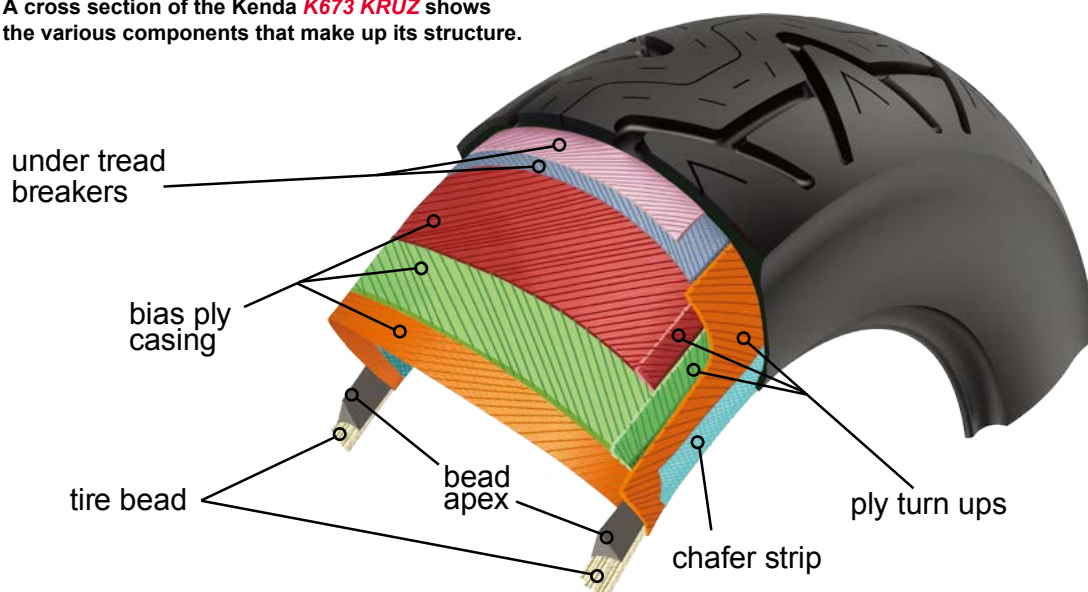

WARNING: Always refer to your motorcycle manufacturer for their recommended replacement tire to ensure you have chosen the correct tire. This tire may not be suitable for your motorcycle if it does not meet the manufacturer's required load carrying capacity.



K674

- Matched front / rear tread pattern for superior stability and maximum handling.
- Deep offset tread sipes provide for excellent water dispersion and wet weather traction.
- 6ply tube / tubeless carcass designed for high speed stability.
- Available for low profile sport / street tire application.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
100/80-17	52S	TL	4.0 / 101	23.3 / 592	441 / 200	36 / 2.50	2.50X17	*	*
110/70-17	54H	TT/TL	4.3 / 110	23.1 / 586	467 / 212	40 / 2.80	3.00X17	*	*
90/90VB19	52V	TL	3.5 / 90	25.4 / 645	441 / 200	42 / 2.95	2.15X19	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
130/70-17	62H	TT/TL	5.1 / 129	24.2 / 614	584 / 265	40 / 2.80	3.50X17	*	*
140/70-17	66H	TT/TL	5.5 / 139	24.7 / 628	661 / 300	40 / 2.80	3.75X17	*	*
110/80VB18	58V	TL	4.3 / 109	24.9 / 633	520 / 236	42 / 2.95	2.50X18	*	*





K676 RETROACTIVE

- V-rated sport bias belted tire for the classic bikes.
- Tread pattern designed for all-weather riding conditions.
- New rubber compound for improved durability and mileage.
- Improved crown radius for larger footprint while cornering.
- Not recommended for high load carrying vehicles.

KENDA
RETROACTIVE

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/80VB16	60V	TL	4.68 / 119	23.54 / 598	551 / 250	42 / 2.95	2.75X16	* *	
110/70VB17	54V	TL	4.30 / 110	23.10 / 586	467 / 212	42 / 2.95	3.00X17	* *	
110/80VB17	57V	TL	4.29 / 109	24.01 / 610	507 / 230	42 / 2.95	2.50X17	* *	
100/90VB18	56V	TL	3.97 / 101	25.07 / 637	494 / 224	42 / 2.95	2.50X17	* *	
110/90VB18	61V	TL	4.40 / 112	25.78 / 655	567 / 257	42 / 2.95	2.50X18	* *	
100/90VB19	57V	TL	3.97 / 101	26.10 / 663	507 / 230	42 / 2.95	2.50X19	* *	



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90VB16	67V	TL	5.07 / 129	25.15 / 639	677 / 207	42 / 2.95	3.00X16	* *	
150/80VB16	71V	TL	5.90 / 150	25.31 / 643	761 / 345	42 / 2.95	3.50X16	* *	
130/70VB17	62V	TL	5.10 / 129	24.20 / 614	584 / 265	42 / 2.95	3.50X17	* *	
140/80VB17	69V	TL	5.59 / 142	25.82 / 656	716 / 325	42 / 2.95	3.50X17	* *	
150/70VB17	69V	TL	5.94 / 151	25.27 / 642	716 / 325	42 / 2.95	4.25X17	* *	
120/90VB18	65V	TL	4.68 / 119	26.49 / 673	639 / 290	42 / 2.95	2.75X18	* *	
130/80VB18	66V	TL	5.07 / 129	26.29 / 668	661 / 300	42 / 2.95	3.00X18	* *	

WARNING: Always refer to your motorcycle manufacturer for their recommended replacement tire to ensure you have chosen the correct tire. This tire may not be suitable for your motorcycle if it does not meet the manufacturer's required load carrying capacity.

K6702 CATAclysm

- Dual-compound technology for improved mileage and added grip while cornering.
- Tread grooving designed to efficiently disperse water while minimizing uneven wear.
- Casing designed to accommodate the largest/heaviest bikes on the market.
- Sizing and profiles for today's most popular cruisers.
- Homologation approved, tubeless, H-rated.

KENDA
CATAclysm



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT	DUAL COMPOUND
130/90B16	67H	TL	5.10 / 130	25.10 / 638	677 / 307	42 / 2.95	3.00X16	* *	*	*
130/80B17	65H	TL	5.10 / 129	25.20 / 640	639 / 290	42 / 2.95	3.00X17	* *	*	*
130/70B18	63H	TL	4.90 / 126	25.50 / 648	600 / 272	42 / 2.95	3.50X18	* *	*	*
100/90B19	57H	TL	3.90 / 101	26.10 / 665	507 / 230	42 / 2.95	2.50X19	* *	*	*
130/60B19	61H	TL	5.08 / 129	25.16 / 639	567 / 257	42 / 2.95	3.50X19	* *	*	*
80/90-21	54H	TL	3.26 / 83	27.00 / 686	467 / 212	42 / 2.95	1.85X21	* *	*	*
90/90-21	54H	TL	3.54 / 90	27.36 / 695	467 / 212	42 / 2.95	2.15X21	* *	*	*
130/60B21	63H	TL	5.08 / 129	27.13 / 689	600 / 272	42 / 2.95	3.50X21	* *	*	*

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT	DUAL COMPOUND
170/80B15	77H	TL	6.60 / 170	25.7 / 653	908 / 412	42 / 2.95	4.00X15	* *	*	*
130/90B16	73H	TL	5.40 / 138	25.3 / 644	805 / 365	42 / 2.95	3.00X16	* *	*	*
140/90B16	77H	TL	5.70 / 145	25.6 / 651	908 / 412	42 / 2.95	3.50X16	* *	*	*
150/80B16	77H	TL	5.90 / 150	25.4 / 646	908 / 412	42 / 2.95	3.50X16	* *	*	*
180/65B16	81H	TL	7.00 / 180	25.1 / 640	1019 / 462	42 / 2.95	5.00X16	* *	*	*
160/70B17	79H	TL	6.34 / 161	25.8 / 656	963 / 437	42 / 2.95	4.50X17	* *	*	*
180/55B18	80H	TL	7.00 / 178	25.8 / 655	992 / 450	42 / 2.95	5.50X18	* *	*	*





K6703 KT1

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-17	54H	TL	4.3 / 110	23.1 / 586	467 / 212	40 / 2.8	3.00X17		*
120/70-17	58H	TL	4.8 / 122	23.6 / 600	520 / 236	40 / 2.8	2.50X17		*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
140/70-17	66H	TL	5.5 / 139	24.7 / 628	661 / 300	40 / 2.8	3.75X17		*
150/60-17	66H	TL	5.9 / 151	24.1 / 612	661 / 300	40 / 2.8	4.25X17		*
160/60-17	69H	TL	6.3 / 161	24.6 / 624	716 / 325	40 / 2.8	4.50X17		*



K711

- Great traction on wet and slippery surfaces due to increased rain grooves.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/80-17	52S	TL	4.0 / 101	23.3 / 592	441 / 200	36 / 2.5	2.50X17	*	*
100/80-17	52H	TL	4.0 / 101	23.3 / 592	441 / 200	40 / 2.8	2.50X17	*	*
110/70-17	54H	TL	4.3 / 110	23.1 / 586	467 / 212	40 / 2.8	3.00X17	*	*
110/80-17	57H	TL	4.3 / 109	23.9 / 608	507 / 230	40 / 2.8	2.50X17	*	*
120/70-17	58H	TL	4.8 / 122	23.6 / 600	520 / 236	40 / 2.8	3.50X17	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/80-17	61H	TL	4.7 / 119	24.6 / 624	567 / 257	40 / 2.8	2.75X17	*	*
130/70-17	62H	TL	5.1 / 129	24.1 / 614	584 / 265	40 / 2.8	3.50X17	*	*
130/70-17	62S	TL	5.1 / 129	24.1 / 614	584 / 265	36 / 2.5	3.50X17	*	*
140/60-17	63H	TL	5.5 / 139	23.6 / 600	600 / 272	40 / 2.8	3.75X17	*	*
140/70-17	66H	TL	5.5 / 139	24.7 / 628	661 / 300	40 / 2.8	3.75X17	*	*
140/70-17	66P	TL	5.5 / 139	24.7 / 628	661 / 300	33 / 2.3	3.75X17	*	*
150/70-17	69H	TL	5.9 / 151	25.3 / 642	716 / 325	40 / 2.8	4.25X17	*	*
150/60-17	66H	TL	5.9 / 151	24.1 / 612	661 / 300	40 / 2.8	4.25X17	*	*
160/60-17	69H	TL	6.3 / 161	24.6 / 624	716 / 325	40 / 2.8	4.50X17	*	*



K761FA

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-16	73H	TL	5.19 / 132	25.27 / 642	805 / 365	42 / 2.9	3.00X16	*	*



K761K

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-16	73H	TL	5.35 / 136	25.27 / 642	805 / 365	42 / 2.9	3.00X16	*	*
150/80-16	71H	TL	5.82 / 148	25.51 / 648	761 / 345	42 / 2.9	3.00X16	*	*





K270 DUAL SPORT

- The battle tested legend of among dual sport riders worldwide.
- 4 and 6ply rated casings.
- 50% dirt, 50% street.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
180/80-14		78P	TT	7.1 / 180	25.4 / 644	937 / 425	33 / 2.3	4.50X14	*
2.50-17		38P	TT	2.5 / 65	22.3 / 568	291 / 132	33 / 2.3	1.60X17	*
2.75-17		41P	TT	2.9 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*
3.25-17	4PR	50P	TT	3.5 / 89	24.2 / 614	419 / 190	33 / 2.3	2.15X17	* *
3.25-17	6PR	57P	TT	3.3 / 86	24.0 / 610	507 / 230	40 / 2.8	2.15X17	*
3.50-17	4PR	54P	TT	3.7 / 93	24.6 / 624	551 / 250	33 / 2.3	2.15X17	* *
4.60-17	4PR	61P	TT	4.5 / 114	24.9 / 632	567 / 257	33 / 2.3	2.15X17	* *
4.60-17	6PR	65P	TT	4.5 / 114	24.9 / 632	638 / 290	40 / 2.8	2.15X17	* *
5.10-17	6PR	71P	TT	5.4 / 137	25.9 / 658	761 / 345	40 / 2.8	3.00X17	* *
100/90-18	4PR	56P	TT	4.0 / 101	25.1 / 637	494 / 224	33 / 2.3	2.50X18	*
120/80-18	4PR	62P	TT	4.7 / 119	25.6 / 649	584 / 265	33 / 2.3	2.75X18	* *
120/80-18	6PR	68P	TT	4.7 / 119	25.6 / 649	694 / 315	40 / 2.8	2.75X18	*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	* *
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	* *
3.50-18	4PR	56P	TT	3.7 / 93	25.6 / 649	494 / 224	33 / 2.3	2.15X18	* *
4.00-18	4PR	64P	TT	4.1 / 104	26.4 / 671	617 / 280	33 / 2.3	2.15X18	* *
4.00-18	6PR	69P	TT	4.1 / 104	26.4 / 671	716 / 325	40 / 2.8	2.15X18	* *
4.10-18	4PR	58P	TT/TL	3.8 / 97	25.2 / 639	520 / 236	33 / 2.3	2.15X18	* *
4.10-18	6PR	63P	TT	3.8 / 97	25.2 / 639	600 / 272	40 / 2.8	2.15X18	*
4.50-18	6PR	73P	TT	4.8 / 122	27.2 / 691	805 / 365	40 / 2.8	2.50X18	* *
4.60-18	4PR	63P	TT	4.2 / 106	26.4 / 670	600 / 272	33 / 2.3	2.50X18	* *
4.60-18	6PR	68P	TT	4.2 / 106	26.4 / 670	694 / 315	40 / 2.8	2.50X18	* *
5.10-18	6PR	73P	TT	5.2 / 132	27.0 / 686	805 / 365	40 / 2.8	3.00X18	* *
130/80-18		66P	TT	5.1 / 129	26.2 / 665	661 / 300	33 / 2.3	3.00X18	*
2.75-19	4PR	43P	TT	3.0 / 75	25.2 / 639	342 / 155	33 / 2.3	1.85X19	* *
90/90-19		52P	TT	3.5 / 90	25.3 / 645	441 / 200	33 / 2.3	2.15X19	* *
2.50-21	4PR	43P	TT	2.6 / 65	26.3 / 669	342 / 155	33 / 2.3	1.60X21	* *
2.75-21	4PR	45P	TT	3.0 / 75	27.1 / 689	364 / 165	33 / 2.3	1.85X21	* *
2.75-21	6PR	52P	TT	3.0 / 75	27.1 / 689	441 / 200	40 / 2.8	1.85X21	*
3.00-21	4PR	51P	TT	3.1 / 80	27.7 / 703	430 / 195	33 / 2.3	1.85X21	* *
3.00-21	4PR	57P	TT	3.1 / 80	27.7 / 703	507 / 230	40 / 2.8	1.85X21	*
3.25-21	4PR	57P	TT	3.5 / 89	28.1 / 715	507 / 230	33 / 2.3	2.15X21	* *
90/90-21	4PR	54P	TT	3.5 / 90	27.4 / 695	467 / 212	33 / 2.3	2.15X21	* *



K280

- 4 and 6ply rated casings.
- 50% dirt, 50% street.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-17		60P	TT	4.2 / 109	24.8 / 630	551 / 250	33 / 2.3	2.50X17	*
4.60-17	4PR	61P	TT	4.5 / 114	24.9 / 632	567 / 257	33 / 2.3	2.15X17	* *
130/80-17	4PR	65P	TT	5.1 / 129	25.2 / 640	639 / 290	33 / 2.3	3.00X17	* *
3.50-18	4PR	56P	TT	3.7 / 93	25.6 / 649	494 / 224	33 / 2.3	2.15X18	* *
4.10-18	4PR	58P	TT	4.1 / 104	25.2 / 639	520 / 236	33 / 2.3	2.15X18	* *
4.60-18	4PR	63P	TT	4.4 / 111	25.7 / 654	600 / 272	33 / 2.3	2.15X18	* *
120/80-18		62P	TT	4.6 / 119	25.5 / 649	584 / 265	33 / 2.3	2.75X18	*
90/90-19		52P	TT	3.5 / 90	25.3 / 645	441 / 200	33 / 2.3	2.15X19	*
2.75-21	4PR	45P	TT	3.0 / 75	27.1 / 689	364 / 165	33 / 2.3	1.85X21	* *
3.00-21	4PR	51P	TT	3.1 / 80	27.7 / 703	430 / 195	33 / 2.3	1.85X21	* *
90/90-21		54P	TT	3.5 / 90	27.3 / 695	467 / 212	33 / 2.3	2.15X21	*



K760 TRAKMASTER

- Tall aggressive knobs designed for varying terrain.
- 90% dirt, 10% street.
- Durable compound for extended tread life.
- Classic design at affordable price.

KENDA
TRAKMASTER

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
60/100-14 (2.50-14)	38M	TT	2.4 / 61	18.7 / 476	291 / 132	40 / 2.8	1.50X14	*	
60/100-16 (2.50-16)	38M	TT	2.4 / 61	20.7 / 526	291 / 132	40 / 2.8	1.50X16	*	
70/100-17 (2.50/2.75-17)	46M	TT	3.1 / 78	22.5 / 572	374 / 170	40 / 2.8	1.60X17	*	*
70/100-19 (2.50-19)	42M	TT	3.1 / 79	24.5 / 623	331 / 150	33 / 2.3	1.60X19	*	*
70/100-19 (2.50-19)	48M	TT	3.1 / 79	24.5 / 623	397 / 180	40 / 2.8	1.60X19	*	
80/100-21 (3.00/3.25-21)	51M	TT	3.5 / 90	27.3 / 693	430 / 195	33 / 2.3	1.60X21	*	*
90/90-21	54R	TT	3.9 / 98	27.9 / 709	467 / 212	33 / 2.3	2.15X21	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-10	38M	TT	2.6 / 65	15.3 / 389	291 / 132	40 / 2.8	1.50X10	*	
80/100-12	50M	TT	3.1 / 80	18.3 / 465	419 / 190	33 / 2.3	1.85X12	*	
90/100-14 (3.00/4.10-14)	49M	TT	4.3 / 108	21.6 / 548	408 / 185	33 / 2.3	1.85X14	*	*
90/100-16 (3.00/4.10-16)	4PR 51M	TT	3.8 / 97	23.1 / 586	430 / 195	33 / 2.3	1.85X16	*	
90/100-16 (3.00/4.10-16)	6PR 58M	TT	3.8 / 97	23.1 / 586	520 / 236	40 / 2.8	1.85X16	*	
130/90-17 (5.00/5.30-17)	68M	TT	5.5 / 139	26.2 / 666	694 / 315	33 / 2.3	3.00X17	*	
100/100-18 (3.50/4.10-18)	59M	TT	4.5 / 115	25.9 / 657	536 / 243	33 / 2.3	2.50X18	*	*
110/100-18 (4.25/4.60-18)	64M	TT	4.9 / 125	26.7 / 677	617 / 280	33 / 2.3	2.50X18	*	*
120/100-18 (5.00/5.30-18)	68M	TT	5.3 / 133	27.6 / 700	694 / 315	33 / 2.3	2.75X18	*	*
140/80-18	70R	TT	5.5 / 139	26.9 / 682	739 / 335	36 / 2.5	3.50X18	*	*
100/90-19	57M	TT	4.1 / 104	26.1 / 663	507 / 230	33 / 2.3	2.15X19	*	*
110/90-19	62M	TT	4.9 / 124	26.8 / 681	584 / 265	33 / 2.3	2.15X19	*	*
120/90-19	66M	TT	5.3 / 135	27.5 / 699	661 / 300	33 / 2.3	2.50X19	*	



K6309

- Aggressive tread pattern for street and off-road applications.
- Designed for all weather conditions.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-14	35P	TL	2.9 / 75	20.1 / 512	267 / 121	33 / 2.3	1.85X14	*	
3.50-16	52P	TT	3.6 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16	*	
110/90-16	59P	TL	4.2 / 109	23.7 / 604	536 / 243	33 / 2.3	2.50X16	*	
2.50-17	38P	TL	2.5 / 65	22.3 / 568	291 / 132	33 / 2.3	1.60X17	*	
2.75-17	41P	TL	2.9 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	
80/80-17	41P	TL	3.1 / 80	22.0 / 560	320 / 145	33 / 2.3	1.85X17	*	
90/80-17	46S	TL	3.5 / 90	22.6 / 576	375 / 170	36 / 2.5	2.15X17	*	
90/90-17	49P	TL	3.5 / 90	23.3 / 594	408 / 185	33 / 2.3	2.15X17	*	
100/90-17	55P	TL	3.9 / 101	24.0 / 612	481 / 218	33 / 2.3	2.50X17	* *	
110/80-17	57P	TL	4.2 / 109	24.1 / 610	507 / 230	33 / 2.3	2.50X17	*	
110/90-17	60P	TL	4.2 / 109	24.8 / 630	551 / 250	33 / 2.3	2.50X17	*	
120/80-17	61P	TL	4.6 / 119	24.5 / 624	567 / 257	33 / 2.3	2.75X17	*	
120/90-17	64H	TL	4.6 / 119	25.5 / 648	617 / 280	40 / 2.8	2.75X17	*	
130/70-17	62H	TL	5.0 / 129	24.1 / 614	584 / 265	40 / 2.8	3.50X17	*	
130/80-17	65S	TT/TL	5.1 / 129	25.2 / 640	639 / 290	33 / 2.3	3.00X17	* *	
2.75-18	4PR	42P	TL	3.0 / 77	331 / 150	33 / 2.3	1.85X18	*	
3.00-18	4PR	47P	TL	3.1 / 80	386 / 175	33 / 2.3	1.85X18	*	
80/80-18	42P	TT	3.1 / 80	23.0 / 585	331 / 150	33 / 2.3	1.85X18	*	
90/90-18	51P	TL	3.5 / 90	24.3 / 619	430 / 195	33 / 2.3	2.15X18	*	
110/80-18	58P	TL	4.2 / 109	24.9 / 633	520 / 236	33 / 2.3	2.50X18	*	
120/80-18	62P	TL	4.6 / 119	25.5 / 649	584 / 265	33 / 2.3	2.75X18	*	
90/90-21	54P	TL	3.5 / 90	27.3 / 695	467 / 212	33 / 2.3	2.15X21	*	



K761

- One of the world's most popular dual sport tread patterns.
- Perfect for road-focused dual sport applications.
- Trusted by several major manufacturers for performance and reliability.
- Tubeless 4-ply rated casing design.
- DOT approved.
- 70% street, 30% dirt.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-14	4PR	43L	TT	3.1 / 80	20.3 / 516	342 / 155	33 / 2.3	1.85X14	*
180/80-14	4PR	78P	TT	7.1 / 180	25.4 / 644	937 / 425	33 / 2.3	4.50X14	* *
100/90-16	4PR	54P	TL	4.0 / 101	23.1 / 586	467 / 212	33 / 2.3	2.50X16	* *
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	* *
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	* *
3.00-17	4PR	45P	TT/TL	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17	*
3.00-17	6PR		TT	3.1 / 80	23.7 / 602	419 / 190	40 / 2.8	1.85X17	*
90/90-17	4PR	49P	TL	3.5 / 90	23.4 / 594	408 / 185	33 / 2.3	2.15X17	* *
100/80-17	4PR	52P	TL	4.0 / 101	23.3 / 592	441 / 200	33 / 2.3	2.50X17	*
100/90-17	4PR	55P	TL	4.0 / 101	24.1 / 612	481 / 218	33 / 2.3	2.50X17	*
110/80-17 (4.10-17)	4PR	57P	TL	4.3 / 109	23.9 / 608	507 / 230	33 / 2.3	2.50X17	* *
110/90-17		60P	TT	4.3 / 109	24.8 / 630	550 / 250	40 / 2.8	2.50X17	* *
120/70-17	4PR	58S	TL	4.8 / 122	23.6 / 600	520 / 236	33 / 2.3	3.50X17	*
120/80-17 (4.60-17)	4PR	61P	TL	4.7 / 119	24.6 / 624	567 / 257	33 / 2.3	2.75X17	* *
120/90-17	4PR	64H	TT/TL	4.7 / 119	25.5 / 648	617 / 280	33 / 2.3	2.75X17	* *
130/70-17	4PR	62S	TL	5.1 / 129	24.2 / 614	582 / 265	33 / 2.3	3.50X17	*
130/80-17	4PR	65H	TT/TL	5.1 / 129	25.2 / 640	639 / 290	33 / 2.3	3.00X17	* *
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*
90/90-18		51P	TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*
4.10-18	4PR	59P	TT	4.1 / 104	25.2 / 639	536 / 243	33 / 2.3	2.15X18	* *
110/80-18	4PR	58H	TT/TL	4.3 / 109	24.9 / 633	520 / 236	33 / 2.3	2.50X18	* *
120/80-18	4PR	62H	TT/TL	4.7 / 119	25.6 / 649	584 / 265	33 / 2.3	2.75X18	* *
130/80-18	4PR	66P	TT	5.1 / 129	26.2 / 665	661 / 300	33 / 2.3	3.00X18	* *
100/90-19	4PR	57H	TT/TL	4.0 / 101	26.1 / 663	507 / 230	33 / 2.3	2.50X19	* *
90/90-19		52P	TT	3.5 / 90	25.4 / 645	441 / 200	33 / 2.3	2.15X19	* *
2.75-21	4PR	45P	TT	3.0 / 75	27.1 / 689	364 / 165	33 / 2.3	1.85X21	* *
90/90-21	4PR	54P	TT	3.5 / 90	27.4 / 695	467 / 212	33 / 2.3	2.15X21	* *
90/90-21	4PR	54H	TT/TL	3.5 / 90	27.4 / 695	467 / 212	33 / 2.3	2.15X21	* *



APPDOCCIA
www.appdoccia.com

12

87

rukka

VOYAGER

Butterfly
WILSON

Discovery

Discovery

Introducing the Kenda Trakmaster DTR: The Trakmaster DTR delivers uncompromising performance on any surface and in any terrain. It starts with confidence-inspiring, predictable traction on wet and dry paved surfaces. When the trail gets tough, aggressive shoulders and stepped biting edges provide exceptional control in the dirt. Proprietary rubber compounds ensure the perfect balance between on and off-road traction and impressive mileage performance. Made to fit most adventure bike and bikes bound for adventure.

K6342 TRAKMASTER DTR

- Aggressive shoulders and stepped biting edges providing exceptional control in the dirt.
- Uncompromised performance on any surface and in any terrain.
- Predictable traction on wet and dry paved surfaces.
- Proprietary rubber compound for the perfect blend of off-road traction and mileage performance.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70R17	58V M+S	TL	4.8 / 122	23.6 / 600	520 / 236	41 / 2.89	3.50X17	* *	
100/90B19	57T M+S	TL	4.0 / 102	26.2 / 666	507 / 230	41 / 2.89	2.50X19	* *	
110/80B19	59T M+S	TL	4.3 / 109	25.9 / 659	536 / 243	42 / 2.90	2.50X19	* *	
120/70B19	60T M+S	TL	4.7 / 119	26.0 / 658	551 / 250	41 / 2.89	3.50X19	* *	
90/90B21	54T M+S	TL	3.4 / 87	27.6 / 700	467 / 212	41 / 2.89	2.15X21	* *	

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
150/80B16	71H M+S	TL	5.9 / 149	25.5 / 647	761 / 345	41 / 2.89	3.50X16	* *	
120/90B17	64T M+S	TL	4.8 / 122	25.5 / 648	617 / 280	41 / 2.89	3.00X17	* *	
130/80B17	65T M+S	TL	5.0 / 128	25.2 / 641	639 / 290	41 / 2.89	3.00X17	* *	
140/80B17	69H M+S	TL	5.5 / 140	25.9 / 657	716 / 325	41 / 2.89	3.50X18	* *	
150/70R17	69V M+S	TL	5.9 / 151	25.3 / 643	716 / 325	42 / 2.95	4.25X17	* *	
170/60R17	72V M+S	TL	6.6 / 168	25.0 / 636	783 / 355	41 / 2.89	4.50X18	* *	
180/55R17	73V M+S	TL	7.0 / 178	24.8 / 630	805 / 365	41 / 2.89	5.50X17	* *	
120/80B18	62T M+S	TL	4.6 / 118	25.6 / 650	584 / 265	41 / 2.89	2.75X18	* *	
120/90B18	65T M+S	TL	4.6 / 118	26.5 / 674	639 / 290	41 / 2.89	2.75X18	* *	
140/80B18	70T M+S	TL	5.6 / 142	26.8 / 681	739 / 335	42 / 2.90	3.50X18	* *	
150/70B18	70T M+S	TL	5.9 / 152	26.2 / 667	739 / 335	42 / 2.90	4.25X18	* *	



K784 BIG BLOCK

- Tread pattern provides high traction on a variety of terrain.
- Large tread blocks for improved tread wear and high speed handling.
- High impact, bias ply, casing structure for increased puncture resistance.
- Rubber compound designed specifically for a wide variety of terrain.
- 50% street, 50% dirt.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90B19	57S M+S	TL	3.98 / 101	26.10 / 663	507 / 230	36 / 2.5	2.50X19	* *	
110/80B19	59Q M+S	TL	4.3 / 109	25.4 / 659	536 / 243	36 / 2.5	2.50X19	* *	
120/70B19	60Q M+S	TL	4.80 / 122	25.62 / 651	551 / 250	36 / 2.5	3.50X19	* *	
90/90B21	54T M+S	TL	3.5 / 90	27.4 / 695	467 / 212	36 / 2.5	2.15X21	* *	



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
140/90B16	77Q M+S	TL	5.5 / 142	25.9 / 658	908 / 412	42 / 2.9	3.50X16	* *	
130/80B17	65T M+S	TL	5.1 / 129	25.2 / 640	639 / 290	36 / 2.5	3.00X17	* *	
140/80B17	69S M+S	TL	5.6 / 142	25.8 / 656	716 / 325	38 / 2.6	3.50X18	* *	
150/70B17	69Q M+S	TL	5.9 / 151	25.3 / 642	716 / 325	36 / 2.5	4.25X17	* *	
170/60B17	72Q M+S	TL	6.61 / 168	25.03 / 636	783 / 355	36 / 2.5	4.50X17	* *	
130/80B18	66T M+S	TL	5.1 / 129	26.2 / 665	661 / 300	40 / 2.8	3.00X18	* *	
140/80B18	70R M+S	TL	5.6 / 142	26.8 / 681	739 / 335	36 / 2.5	3.50X18	* *	
150/70B18	70Q M+S	TL	5.9 / 151	26.3 / 667	739 / 335	36 / 2.5	4.25X18	* *	





K6327

- Developed for high mileage riding.
- Excellent water displacement.
- On/off road use 30% dirt / 70% road.
- Proper load rating for today's adventure bike.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-17	54H	TL	4.3 / 109	23.1 / 586	467 / 212	40 / 2.8	3.00X17	*	*
120/70-17	58H	TL	4.8 / 122	23.6 / 600	520 / 236	40 / 2.8	3.50X17	*	*
110/80-19	59H	TL	4.3 / 109	26.1 / 662	536 / 243	40 / 2.8	2.50X19	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
140/60-17	63H	TT/TL	5.5 / 139	23.6 / 600	600 / 272	40 / 2.8	3.75X17	*	*
140/70-17	66H	TL	5.5 / 139	24.7 / 628	661 / 300	40 / 2.8	3.75X17	*	*
150/60-17	66H	TL	5.9 / 149	24.1 / 612	661 / 300	40 / 2.8	4.25X17	*	*
150/70-17	69H	TL	5.9 / 149	25.3 / 642	716 / 325	40 / 2.8	4.25X17	*	*



K262 SMALL BLOCK

- Classic waffle tread pattern with offset shoulder lugs for increased stability.
- 50/50 street/dirt application for confidence on all surfaces.
- Perfect for smaller street and trail bikes.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-14	4PR	40P	TT	3.1 / 80	20.7 / 526	33 / 2.3	1.85X14	*	*
2.50-16	4PR	36P	TT	2.6 / 65	21.3 / 542	33 / 2.3	1.60X16	*	*
2.75-16	4PR	40P	TT	3.0 / 75	22.1 / 562	33 / 2.3	1.85X16	*	*
3.00-16	4PR	43P	TT	3.1 / 80	22.7 / 576	33 / 2.3	1.85X16	*	*
110/90-16		59P	TT/TL	4.3 / 109	23.8 / 604	33 / 2.3	2.50X16	*	*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	40 / 2.8	1.60X17	*	*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	40 / 2.3	1.85X17	*	*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	33 / 2.3	1.85X17	*	*
3.00-17	6PR	50P	TT	3.1 / 80	23.7 / 602	40 / 2.8	1.85X17	*	*
3.25-17	4PR	50P	TT	3.5 / 89	24.2 / 614	33 / 2.3	2.15X17	*	*
120/80-17	4PR	61P	TT	4.7 / 119	24.6 / 624	33 / 2.3	2.75X17	*	*
2.50-18	4PR	40P	TT	2.6 / 65	23.3 / 593	33 / 2.3	1.60X18	*	*
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	33 / 2.3	1.85X18	*	*
3.00-18	4PR	48P	TT/TL	3.1 / 80	24.7 / 627	33 / 2.3	1.85X18	*	*
3.25-18	4PR	52P	TT	3.5 / 89	25.2 / 639	33 / 2.3	2.15X18	*	*
3.50-18	4PR	56P	TT	3.7 / 93	25.6 / 649	33 / 2.3	2.15X18	*	*
100/90-18	4PR	56P	TT	4.0 / 101	25.1 / 637	33 / 2.3	2.50X18	*	*
4.00-18	4PR	64P	TT	4.1 / 104	26.4 / 671	33 / 2.3	2.15X18	*	*
2.25-19	4PR	37P	TT	2.4 / 61	23.9 / 607	33 / 2.3	1.60X19	*	*
2.75-19	4PR	43P	TT	3.0 / 75	25.2 / 639	33 / 2.3	1.85X19	*	*
2.75-21	4PR	45P	TT	3.0 / 75	27.1 / 689	33 / 2.3	1.85X21	*	*
3.00-21	4PR	51P	TT	3.1 / 80	27.7 / 703	33 / 2.3	1.85X21	*	*



K335 ICE TIRE

- Designed specifically for ice racing.
- Hard rubber compound to help retain studs.
- Add studs (sold separately) to fit your preference.
- Uses up to a 5/8" stud without a liner.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
3.50-16	6PR	58P	TT	3.6 / 93	23.7 / 602	520 / 236	40 / 2.8	2.15X16	*
110/90-17		66P	TT	4.3 / 111	24.8 / 632	661 / 300	40 / 2.8	2.50X17	*
2.75-18	6PR	48P	TT	2.9 / 75	24.3 / 618	397 / 180	40 / 2.8	1.85X18	*
4.00-18	4PR		TT	4.5 / 114	27.4 / 695	617 / 280	32 / 2.3	2.15X18	*
4.00-18	6PR		TT	4.5 / 114	27.4 / 695	717 / 325	40 / 2.8	2.15X18	*
4.10-18	6PR	63P	TT	3.8 / 96	25.5 / 648	600 / 272	40 / 2.8	2.15X18	*
4.00-19	4PR		TT	4.5 / 114	27.4 / 695	639 / 290	32 / 2.3	2.15X19	*
4.00-19	6PR		TT	4.5 / 114	27.4 / 695	761 / 345	40 / 2.8	2.15X19	*
90/90-19		58P	TT	3.5 / 90	25.4 / 647	520 / 236	40 / 2.8	2.15X19	*




K257D KLASSIC

- Aggressive four / five knob pattern provides a perfect balance for the toughest dirt durability with a large contact patch .
- The K257D new natural rubber compound adds traction and extends tread life.
- 80% dirt, 20% street.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
4.10-14	4PR	57M	TT	4.3 / 109	21.5 / 546	507 / 230	33 / 2.3	2.15X14	
3.00-16	4PR	43M	TT	3.1 / 80	22.7 / 576	342 / 155	33 / 2.3	1.85X16	
4.10-17	4PR	58M	TT	4.1 / 104	22.4 / 569	520 / 236	33 / 2.3	1.85X17	*
4.60-17	4PR	61P	TT	4.5 / 114	24.9 / 632	567 / 257	33 / 2.3	2.15X17	* *
4.60-17	6PR		TT	4.5 / 114	24.9 / 632	805 / 365	40 / 2.8	2.15X17	
5.10-17	6PR	71P	TT	5.4 / 137	25.9 / 658	661 / 300	40 / 2.8	3.00X17	*
3.00-18	4PR	48P	TT	3.1 / 80	24.7 / 627	396 / 180	33 / 2.3	1.85X18	* *
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18	*
3.50-18	4PR	56P	TT	4.3 / 109	25.2 / 639	494 / 224	33 / 2.3	2.15X18	*
4.10-18	4PR	58P	TT	4.3 / 109	25.2 / 639	520 / 236	33 / 2.3	2.15X18	* *
4.10-18	6PR	63M	TT	4.3 / 109	25.2 / 639	600 / 272	40 / 2.8	2.15X18	*
4.25-18	6PR	70M	TT	4.6 / 117	26.9 / 683	739 / 335	40 / 2.8	2.15X18	
4.50-18 (110/100-18)	6PR	70M	TT	4.8 / 122	27.2 / 691	739 / 335	40 / 2.8	2.15X18	*
4.60-18 (110/100-18)	4PR	63P	TT	5.3 / 136	27.6 / 702	595 / 270	33 / 2.3	2.15X18	*
4.60-18 (110/100-18)	6PR	70M	TT	4.8 / 122	27.2 / 691	739 / 335	40 / 2.8	2.15X18	*
5.10-18 (120/100-18)	6PR	74M	TT	4.8 / 122	27.2 / 692	827 / 375	40 / 2.8	2.15X18	*
5.30-18	6PR	75M	TT	5.2 / 133	28.2 / 716	853 / 387	40 / 2.8	2.50X18	
100/90-19	4PR	57H	TT	4.6 / 116	27.4 / 695	507 / 230	33 / 2.3	2.50X19	* *
100/90-19	6PR	57M	TT	4.6 / 116	27.4 / 695	507 / 230	40 / 2.8	2.50X19	*
110/90-19	6PR	68M	TT	4.9 / 124	26.8 / 681	584 / 265	40 / 2.8	2.15X19	* *
3.00-21 (80/100-21)	4PR	51M	TT	3.1 / 80	27.7 / 703	430 / 195	33 / 2.3	1.85X21	* *
3.00-21 (80/100-21)	6PR	57M	TT	3.1 / 80	27.7 / 703	507 / 230	40 / 2.8	1.85X21	*

MX/OFF-ROAD TIRE TERRAIN GUIDE

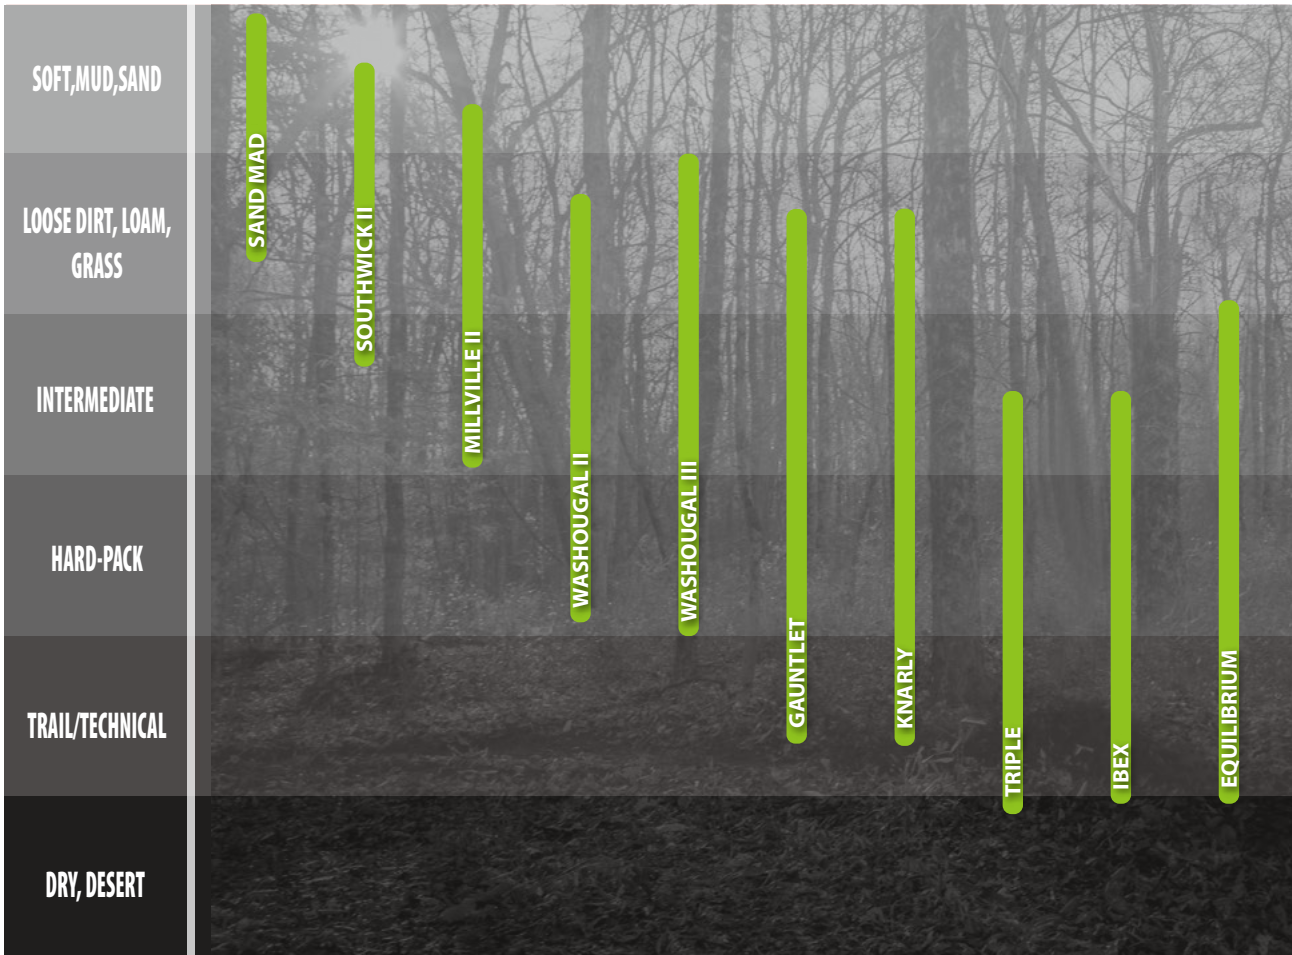

MX/OFF-ROAD TIRE COMPOUND GUIDE

	TIRE NAME	TREAD PATTERN	PERFORMANCE COMPOUND	STICKY COMPOUND	SUPER STICKY COMPOUND	MULTI COMPOUND
MOTOCROSS	SAND MAD	K782		●		
	SOUTHWICK II	K780	●			
	MILLVILLE II	K785	●			
	WASHOUGAL II	K786		●		●
	WASHOUGAL III	K7102	●			
	TRIPLE	K781		●		
	EQUILIBRIUM	K787			●	
	IBEX	K774			●	
EXTREME/ENDURO	GAUNTLET	K776F/K779			●	
	KNARLY	K777F/K778			●	



MOTOCROSS



K780 SOUTHWICK II

- Designed for sand and mud conditions.
- Tall knob depths for deep bite.
- Large radius support at knob base reduces knob roll in soft areas with a hard base.
- Wide space between rows self-cleans tread even at slow speeds.
- Standard compound allows for increased wear durability and offers quick warm-up on cement start pads.
- Lightweight 4ply rated casing structure with reinforced sidewalls.



FRONT

SIZE	SPEED/LOAD RATING	WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M	TT 3.6 / 92	27.8 / 705	430 / 195	33 / 2.3	1.60X21	*	*



REAR

SIZE	SPEED/LOAD RATING	WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/100-18	59M	TT 4.6 / 118	26.1 / 664		20 / 1.4	1.85X18		
110/100-18	64M	TT 5.0 / 128	26.4 / 670		20 / 1.4	2.15X18		
100/90-19	57M	TT 4.6 / 118	26.8 / 680		20 / 1.4	1.85X19		
110/90-19	62M	TT 5.0 / 127	27.3 / 693		20 / 1.4	2.15X19		





K781 TRIPLE

- Developed and proven in Arenacross and Supercross races.
- Low profile sidewall for improved cornering stability and cornering traction.
- Tread pattern designed for hard packed, slippery surfaces.
- Dimpled knobs allow for quick tire warm up and extra traction.
- Lightweight 4ply rated casing structure with reinforced sidewalls.
- Sticky rubber compound for high traction.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M	TT	3.7 / 93	28.0 / 711	430 / 195	33 / 2.3	1.60X21	*	*
90/90-21	54R	TT	3.7 / 93	27.2 / 690	467 / 212	33 / 2.3	1.60X21	*	*
90/100-21	57M	TT	3.8 / 96	27.9 / 708		20 / 1.4	1.60X21		*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
110/100-18	64M	TT	5.0 / 128	26.4 / 670		20 / 1.4	2.15X18		
120/100-18	68M	TT	5.3 / 135	27.3 / 693		20 / 1.4	2.50X18		
100/90-19	57M	TT	4.6 / 118	26.8 / 680		20 / 1.4	1.85X19		
110/80-19	59M	TT	4.9 / 125	26.8 / 680		20 / 1.4	2.15X19		
110/90-19	62M	TT	5.0 / 127	27.3 / 693		20 / 1.4	2.15X19		
120/80-19	63M	TT	5.0 / 128	26.9 / 683		20 / 1.4	2.15X19		

K782 SAND MAD

- Designed specifically for deep mud or sandy MX course conditions.
- Paddle shaped knobs create a large scoop for improved acceleration traction.
- Unique shoulder knob design for predictable cornering traction.
- Siped knob surface for quick tire warm up on cement start pads.
- Lightweight 4ply rated casing structure with reinforced sidewalls.
- Sticky rubber compound for high traction on concrete start gates.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
100/90-19	57M	TT	4.7 / 120	26.8 / 680		20 / 1.4	1.85X19		
110/90-19	62M	TT	5.0 / 127	27.3 / 693		20 / 1.4	2.15X19		

K782A SAND MAD

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
90/100-16	51M	TT	7.3 / 110	23.4 / 595	441 / 200	20 / 1.4	1.85X16		
110/100-18	64M	TT	5.0 / 127	26.4 / 671	617 / 280	20 / 1.4	2.15X18		





K785 MILLVILLE II

- Directionally designed for soft or intermediate terrain, perfect for MX.
- New compound formula provides the best of both worlds, traction and durability.
- Improved braking traction due to paddle shape pattern.
- Improved cornering traction with more biting edges.
- Tie bar knob support to reduce knob roll and increase durability.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
2.50-10 (60/100-10)	33J	TT	2.6 / 66	15 / 381		20 / 1.4	1.50X10		
60/100-14	30M	TT	2.7 / 68	19.3 / 490		20 / 1.4	1.60X14		
70/100-17	40M	TT	3.2 / 80	22.8 / 578		20 / 1.4	1.40X17		
70/100-19	42M	TT	3.2 / 80	24.9 / 633		20 / 1.4	1.40X19		
80/100-21	51M	TT	3.7 / 93	28.0 / 711	430 / 195	33 / 2.3	1.60X21	*	*
90/100-21	57M	TT	3.8 / 96	27.9 / 708		20 / 1.4	1.60X21	*	

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
2.75-10 (70/100-10)	38J	TT	2.8 / 72	15.3 / 390		20 / 1.4	1.50X10		
80/100-12	41M	TT	3.58 / 91	18.42 / 468		20 / 1.4	1.60X12		
90/100-14	49M	TT	4.3 / 108	21.4 / 544		20 / 1.4	1.60X14		
90/100-16	52M	TT	4.3 / 110	23.42 / 595		20 / 1.4	1.85X16		
90/100-17	53M	TT	4.3 / 110	24.4 / 620		20 / 1.4	2.15X17		
110/100-18	64M	TT	5.0 / 128	26.4 / 670		20 / 1.4	2.15X18		
120/100-18	68M	TT	5.3 / 135	27.3 / 693		20 / 1.4	2.50X18		
100/90-19	57M	TT	4.7 / 120	26.8 / 680		20 / 1.4	1.85X19		
110/80-19	59M	TT	4.9 / 125	26.7 / 678		20 / 1.4	2.15X19		
110/90-19	62M	TT	5.1 / 129	27.3 / 694		20 / 1.4	2.15X19		
120/80-19	63M	TT	5.0 / 128	26.9 / 683		20 / 1.4	2.15X19		



K775FA / K786 WASHOUGAL II

- Next generation of the legendary Washougal featuring dual-compound technology.
- Rear: Standard compound in center for durability, sticky compound in shoulder area for cornering stability & traction.
- Front: Single compound.
- All-new rear tread pattern for improved efficiency in a wider variety of course conditions.
- Youth sizes feature sticky compound only.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
80/100-19	49M	TT	3.3 / 83	25.3 / 643	408 / 185	33 / 2.3	1.85X19	*	
80/100-21	51M	TT	3.7 / 93	28.0 / 711	430 / 195	33 / 2.3	1.60X21	*	*
90/100-21	57M	TT	3.8 / 96	27.9 / 708		20 / 1.4	1.60X21	*	

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT	DUAL COMPOUND
80/100-10	42J	TT	3.2 / 81	15.6 / 397		20 / 1.4	1.40X10			
80/100-12	41M	TT	3.58 / 91	18.42 / 468		20 / 1.4	1.60X12			
90/100-14	49M	TT	4.3 / 108	21.4 / 544		20 / 1.4	1.60X14			
90/100-16	52M	TT	4.3 / 110	23.42 / 595		20 / 1.4	1.85X16			
110/100-18	64M	TT	5.0 / 128	26.4 / 670		20 / 1.4	2.15X18			*
120/100-18	68M	TT	5.3 / 135	27.3 / 693		20 / 1.4	2.50X18			*
100/90-19	57M	TT	4.7 / 120	26.8 / 680		20 / 1.4	1.85X19			*
110/80-19	59M	TT	4.9 / 125	26.7 / 678		20 / 1.4	2.15X19			*
110/90-19	62M	TT	5.1 / 129	27.3 / 694		20 / 1.4	2.15X19			*
120/80-19	63M	TT	5.0 / 128	26.9 / 683		20 / 1.4	2.15X19			*





K787 EQUILIBRIUM

- Trials-inspired center tread design for the best possible traction.
- Motocross-style shoulder knobs for aggressive cornering.
- Super Sticky race compound for unbeatable grip in both wet and dry conditions.
- Braking scoops in center area provide the stopping power that a trials tire can't.
- Ultra soft casing for maximum terrain adaptation.

KENDA



EQUILIBRIUM

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
4.50-18	70M	TT	4.7 / 120	27.2 / 691	739 / 335	33 / 2.3	2.15X18	*	*
120/80-19	63M	TT	5.0 / 129	27.3 / 695	595 / 270	20 / 1.4	2.15X19	*	*



K7101 MILLVILLE II EMX

- Special casing for electric MX bikes, pattern design is based on popular Millville II.
- Softer compound formula provides better traction.
- Improved braking traction due to paddle shape pattern.
- Improved cornering traction with more biting edges.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M	TT	3.5 / 80	28.0 / 710	430 / 195	33 / 2.3	1.85X21	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-18	56M	TT	4.8 / 122	26.1 / 664	494 / 224	33 / 2.3	2.50X18	*	
110/90-18	61M	TT	5.1 / 130	26.6 / 675	567 / 257	33 / 2.3	2.50X18	*	
100/90-19	57M	TT	4.8 / 122	26.8 / 680	507 / 230	33 / 2.3	2.50X19		



K7102 WASHOUGAL III

- Next generation of our widely popular Washougal II tire.
- Specifically developed carcass for lighter, more responsive feel.
- Scooped side knobs for the most advanced side biting tire on the market.
- Intermediate tread pattern, for a wide variety of terrain.
- Circumferential sipes in shoulder knobs for better cornering control and feedback.
- Kenda's most advanced casing construction for better lateral response.
- Chamfered intermediate knob edges for better rolling leading edge and better braking trailing edge.
- Radial groove in center block plus scooped trailing edges give better braking control, feedback and stability.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
60/100-10 (2.50-10)	33J	TT	2.9 / 74	15.1 / 384		20 / 1.4	1.40X10		
60/100-12 (2.50-12)	33J	TT	2.9 / 74	17.1 / 435		20 / 1.4	1.40X12		
60/100-14	30M	TT	2.8 / 72	19.3 / 490		20 / 1.4	1.40X14		
90/90-14	46M	TT	3.7 / 95	20.7 / 525	375 / 170	20 / 1.4	1.40X14		
70/100-17	40M	TT	3.3 / 84	23.2 / 590		20 / 1.4	1.60X17		
70/100-19	42M	TT	3.3 / 84	25.2 / 640		20 / 1.4	1.60X19		
80/100-21	51M	TT	3.8 / 97	28.0 / 711	430 / 195	20 / 1.4	1.60X21		
90/100-21	57M	TT	4.1 / 105	28.3 / 720		20 / 1.4	1.60X21		



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-10	42J	TT	3.2 / 81	15.6 / 397		20 / 1.4	1.40X10		
80/100-12	41M	TT	3.58 / 91	18.42 / 468		20 / 1.4	1.60X12		
90/100-12	46M	TT	4.1 / 104	18.9 / 479	375 / 170	20 / 1.4	1.60X12		
90/100-14	49M	TT	4.3 / 108	21.4 / 544		20 / 1.4	1.60X14		
90/100-16	52M	TT	4.3 / 110	23.42 / 595		20 / 1.4	1.85X16		
90/100-18	54M	TT	4.1 / 105	25.4 / 646	467 / 212	20 / 1.4	1.85X18		
100/100-18	59M	TT	4.6 / 118	26.1 / 664		20 / 1.4	1.85X18		
110/100-18	64M	TT	5.08 / 129	26.8 / 681	617 / 280	20 / 1.4	2.15X18		
120/90-18	65M	TT	4.7 / 119	26.5 / 673		20 / 1.4	2.50X18		
100/90-19	57M	TT	4.7 / 120	26.8 / 680		20 / 1.4	1.85X19		
110/90-19	62M	TT	5.1 / 129	27.3 / 694		20 / 1.4	2.15X19		
120/80-19	63M	TT	5.0 / 128	26.9 / 683		20 / 1.4	2.15X19		



K7104F/ K7105 IBEX TRIALS

- Engineered to provide exceptional grip, control and durability, the IbeX Trials is designed for riders who demand premium quality without the premium price.
- Advanced tread pattern- features a strategically designed tread pattern for superior traction on various surfaces such as rocky, slick and uneven challenging terrain.
- Enhanced durability and control- Constructed with proprietary rubber compound and reinforced sidewalls to resist punctures and abrasions, while still offering exceptional performance characteristics.
- The tough yet flexible sidewalls deliver excellent responsiveness and stability, allowing for precise handling in diverse terrain.
- Balanced performance: Provides a perfect blend of grip and cushioning, enhancing rider comfort while maintaining high performance and confidence in demanding conditions.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M	TT	3.2 / 82	27.6 / 702	430 / 195	33 / 2.3	1.85X21	*	



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/100R18	68M	TL	4.7 / 119	27.8 / 705	694 / 315	33 / 2.3	2.75X18	*	

K7106

- 16.5mm deep tread design delivers exceptional digging and off-road traction.
- Widened central tread blocks enhance both acceleration and braking performance.
- Interlaced shoulder knobs improve cornering stability.
- Optimized lateral and longitudinal grooves on the tread improve wet-surface grip.




FRONT

SIZE	SPEED/LOAD RATING	WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M TT	3.8 / 96	28.0 / 712	430 / 195	33 / 2.3	1.85X21		



REAR

SIZE	SPEED/LOAD RATING	WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/100-18	64M TT	5.0 / 128	26.4 / 671	617 / 280	33 / 2.3	2.50X18		
110/90-19	62M TT	5.2 / 132	27.4 / 696	584 / 265	33 / 2.3	2.50X19		

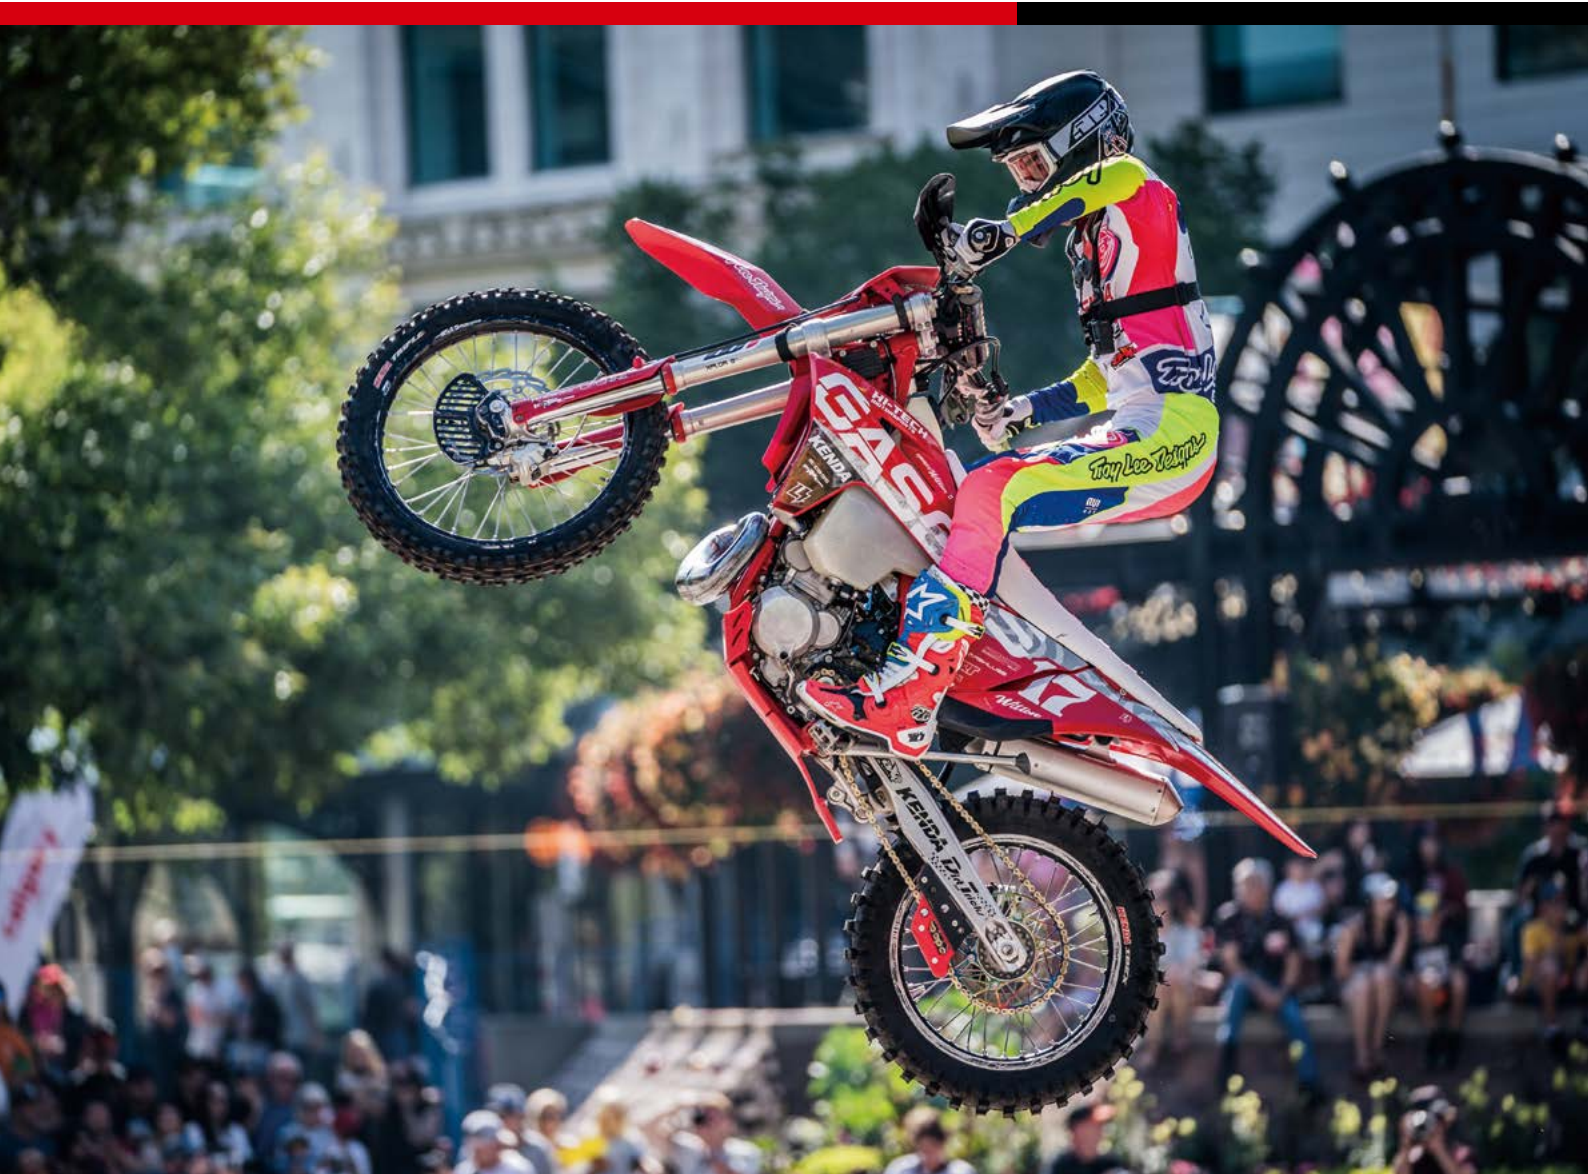



ENDURO



K776F

- DOT approved front tire designed for FIM Enduro and Dual Sport, 80% dirt 20% road.
- Unique directional tread pattern designed to meet the needs of dry, rocky, hard packed terrain.
- Bead rim saver reduces lower sidewall flex and protects from rim damage.
- Durable casing and tread compound for long range riding.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
90/90-21	4PR	54R	TT	3.5 / 90	27.9 / 708	467 / 212	33 / 2.3	1.60X21	*	*



K777F

- DOT approved front tire design for FIM Enduro and Dual Sport, 90% dirt 10% road.
- Unique directional tread pattern designed to meet the needs of intermediate to soft terrain.
- Pyramid shaped knobs to allow good penetration in softer dirt but reduce flex on areas having hard dirt conditions.
- Bead rim saver reduces lower sidewall flex and protects from rim damage.
- Durable casing and tread compound for long range riding.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
90/90-21	4PR	54R	TT	3.5 / 90	27.9 / 708	467 / 212	33 / 2.3	1.60X21	*	*



K778

- DOT approved rear tire designed for FIM Enduro and Dual Sport, 90% dirt 10% road.
- FIM legal 13mm tread depth with dual rotation tread design to cover all types of terrain.
- Durable casing and tread compound for long range riding.




SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
120/90-18	4PR	65R	TT	5.0 / 126	26.6 / 676	639 / 290	33 / 2.3	2.15X18	*	*
140/80-18	4PR	70R	TT	5.4 / 137	27.2 / 690	739 / 335	33 / 2.3	2.50X18	*	*
130/80-19	4PR	67R	TT	5.0 / 128	27.4 / 696	677 / 307	33 / 2.3	2.50X18	*	*



K779

- Designed to meet the needs of FIM Enduro racing.
- Tread pattern designed for a wide range of application including dry loose dirt, rocks, soft dirt or muddy condition.
- Meets the FIM Enduro regulation 13mm tread depth.
- DOT approved.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
130/80-18	4PR	66R	TT	5.0 / 128	26.5 / 674	661 / 300	33 / 2.3	2.50X18	*	*
140/80-18	4PR	70R	TT	5.3 / 134	27.0 / 685	739 / 335	33 / 2.3	2.50X18	*	*



K774 IBEX

- Designed for Endurocross and Extreme Enduro-type conditions.
- Super-soft and flexible rubber compound for maximum bump absorption and terrain compliance for obstacles like rock gardens and log crossings.
- High wet-traction compound developed by top pro Endurocross riders.
- Open aggressive drive pattern for max grip and clean out.
- Shoulder knob pattern designed for large contact patch and support for soft compound during cornering.
- Ultra soft casing for maximum terrain adaptation.
- Built for extreme enduro and very technical terrain.
- Designed for today's Hard Enduro's that require precise handling and optimal traction.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-21	51M	TT	3.7 / 93	27.7 / 704	430 / 195	20 / 1.4	1.60X21		*
90/100-21	57M	TT	3.8 / 96	27.9 / 708	507 / 230	20 / 1.4	1.60X21		*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/100-14	49M	TT	4.3 / 110	21.5 / 545	408 / 185	20 / 1.4	1.60X14		
90/100-16	52M	TT	4.3 / 110	23.6 / 600	441 / 200	20 / 1.4	1.85X16		
110/100-18	64M	TT	5.0 / 128	26.4 / 670	617 / 280	20 / 1.4	2.15X18		
120/100-18	68M	TT	5.3 / 135	27.3 / 693	694 / 315	20 / 1.4	2.50X18		
140/80-18	70M	TT	5.3 / 135	25.0 / 635	739 / 335	20 / 1.4	2.50X18		
120/90-19	66M	TT	5.3 / 135	27.5 / 699	661 / 300	20 / 1.4	2.50X19		



K776F / K779 GAUNTLET

- Hard Enduro FIM approved.
- Perfect balance of sticky grip and long lasting wear.
- Open, aggressive pattern allows for excellent cleanout.
- Low front profile provides the best feel and confidence when tractions matters the most.
- Available in super wide rear and 2 other popular sizes.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-21	4PR	54R	TT	3.5 / 90	27.9 / 708	467 / 212	33 / 2.3	1.60X21	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/80-18	4PR	66R	TT	5.0 / 128	26.5 / 674	661 / 300	33 / 2.3	2.50X18	* *
140/80-18	4PR	70R	TT	5.3 / 134	27.0 / 685	739 / 335	33 / 2.3	2.50X18	* *



K777F / K778 KNARLY

- Extreme enduro FIM approved.
- Super-soft and flexible for ultimate terrain compliance and grip.
- Compound provides highest traction in both wet and dry conditions.
- Reversible rear for variable terrain applications.
- Available in super wide rear and 3 other popular sizes.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-21	4PR	54R	TT	3.5 / 90	27.9 / 708	467 / 212	33 / 2.3	1.60X21	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/90-18	4PR	65R	TT	5.0 / 126	26.6 / 676	639 / 290	33 / 2.3	2.15X18	* *
140/80-18	4PR	70R	TT	5.4 / 137	27.2 / 690	739 / 335	33 / 2.3	2.50X18	* *
130/80-19	4PR	67R	TT	5.0 / 128	27.4 / 696	677 / 307	33 / 2.3	2.50X18	* *

K7107

- Meets FIM standards.
- Widened horizontal knob layout significantly boosts traction.
- Shoulder knob enhances cornering grip and anti-slip performance.
- Longitudinal grooves on the tread efficiently cut through rocks and roots.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-21		54R	TT	3.7 / 94	28.1 / 713	467 / 212	36 / 2.5	2.15X21	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/90-18		65R	TT	4.8 / 122	26.7 / 678	639 / 290	36 / 2.5	2.75X18	* *
140/80-18		70R	TT	5.3 / 134	27.0 / 685	739 / 335	36 / 2.5	3.50X18	* *



K261A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2-1/4-14	4PR	24B	TT	2.4 / 62	19.0 / 482	198 / 90	33 / 2.3	1.50X14		*
2-1/4-17	4PR	28B	TT	2.4 / 62	21.7 / 553	220 / 100	33 / 2.3	1.50X17	*	*



K657F


SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-16	4PR	36P	TT	2.6 / 65	21.3 / 542	276 / 125	33 / 2.3	1.60X16		*
2.50-16	6PR	41M	TL	2.6 / 65	21.3 / 542	320 / 145	40 / 2.8	1.60X16		*
2-3/4-16	4PR	36B	TT	3.0 / 75	22.0 / 558	309 / 140	33 / 2.3	1.85X16	*	*
2-1/2-17	4PR	38B	TT	2.7 / 68	22.6 / 574	291 / 132	33 / 2.3	1.60X17	*	*
2-3/4-17	4PR	38B	TT	3.0 / 75	23.0 / 584	291 / 132	33 / 2.3	1.60X17	*	*



K77

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2-1/2-16	4PR	31B	TT	2.7 / 68	21.6 / 548	240 / 109	33 / 2.3	1.60X16	*	*
2-1/4-16	4PR	26B	TT	2.4 / 62	20.9 / 532	209 / 95	33 / 2.3	1.50X16	*	*
2-17	4PR	22B	TT	2.2 / 56	21.4 / 544	187 / 85	36 / 2.5	1.35X17	*	*
2-1/4-17	2PR	28B	TT	2.4 / 62	21.7 / 553	220 / 100	25 / 1.75	1.50X17	*	*

SCOOTER / MINI-MOTO TIRE TERRAIN GUIDE

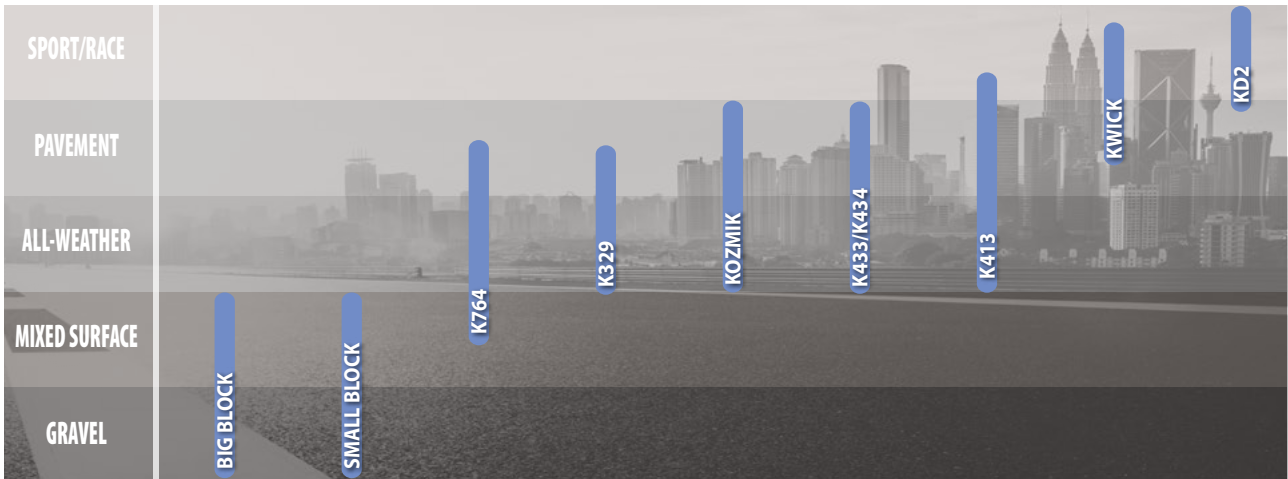



KD1 KWICK

- Race-inspired sticky compound.
- Low rolling resistance with optimum cornering traction.
- Ideal for Honda GROM, Kawasaki Z125 and similar lightweight street bikes.
- Available in 6 popular sizes.

KENDA KWICK

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-12	49J	TL	3.9 / 100	18.9 / 482	408 / 185	25 / 1.75	2.50X12		*
110/70-12	47L	TL	4.3 / 110	18.0 / 459	386 / 175	33 / 2.3	3.00X12		*
120/70-12	51L	TL	4.8 / 122	18.7 / 475	430 / 195	33 / 2.3	3.50X12		*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12	51L	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12		*
120/80-12	55J	TL	4.6 / 119	19.5 / 497	481 / 218	25 / 1.75	2.75X12		*
130/70-12	56L	TL	5.0 / 129	19.1 / 487	494 / 224	33 / 2.3	3.50X12		*





K303A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TT	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.50-10	4PR	51J	TT	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR	56J	TT	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10		*



K324

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TT/TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	6PR	47J	TT/TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10		
3.50-10	4PR	51J	TT/TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR	56J	TT/TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10		
90/90-10	4PR	50J	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	*	*



K329

- Performance-style tread pattern.
- Balanced design for both mileage and wet weather traction.

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-10	4PR	33J	TT	2.6 / 65	15.3 / 389	254 / 115	33 / 2.3	1.50X10		*
2.75-10	4PR	37J	TT	2.8 / 71	15.7 / 399	282 / 128	33 / 2.3	1.75X10	*	*
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR		TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10		*
90/90-10	4PR	50J	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	*	*
90/90-10	6PR	55J	TL	3.5 / 90	16.4 / 416	481 / 218	40 / 2.8	2.15X10		*
100/80-10	4PR	52J	TL	4.0 / 101	16.3 / 414	441 / 200	36 / 2.5	2.50X10	*	*
100/90-10	4PR	56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*	*
120/90-10		57J	TL	4.7 / 119	18.5 / 470	507 / 230	25 / 1.75	2.75X10	*	*
140/90-10	6PR		TL	5.5 / 140	19.9 / 506	739 / 335	40 / 2.8	3.00X10		*



K346

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR	56J	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
3.50-10	8PR	58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*	*
120/90-10	4PR	66J	TL	4.7 / 119	18.5 / 470	661 / 300	36 / 2.5	2.75X10	*	*
120/90-10		71J	TL	4.7 / 119	18.5 / 470	761 / 345	44 / 3.0	2.75X10	*	*
130/90-10		61J	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	*	*
130/90-10	4PR	70J	TL	5.1 / 129	19.2 / 488	739 / 335	33 / 2.3	3.00X10	*	*
130/90-10		75J	TL	5.1 / 129	19.2 / 488	853 / 387	44 / 3.0	3.00X10	*	*
130/80-15	4PR	63P	TL	5.1 / 129	23.2 / 589	600 / 272	33 / 2.3	3.00X15	*	*
130/90-15	4PR	66P	TT/TL	5.1 / 129	24.2 / 615	661 / 300	33 / 2.3	3.00X15	*	*
100/90-16		54P	TL	4.0 / 101	23.1 / 586	467 / 212	33 / 2.3	2.50X16	*	*
110/90-16	4PR	59P	TT/TL	4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16	*	*
110/90-16	6PR	65P	TT/TL	4.3 / 109	23.8 / 604	639 / 290	40 / 2.8	2.50X16	*	*



K348

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	6PR	47J	TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10	*	*
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR	56J	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
90/100-10	4PR	53J	TL	3.5 / 90	17.1 / 434	454 / 206	36 / 2.5	2.15X10	*	*
100/90-10	4PR	56J	TL	4.0 / 101	17.1 / 434	494 / 224	33 / 2.3	2.50X10	*	*
90/90-10	4PR	50J	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	*	*
90/90-12	4PR	54J	TL	3.5 / 90	18.4 / 467	467 / 212	36 / 2.5	2.15X12	*	*



K412

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-12		44J	TL	3.5 / 90	18.4 / 467	353 / 160	25 / 1.75	2.15X12	*	*
90/90-12	4PR	54J	TL	3.5 / 90	18.4 / 467	467 / 212	36 / 2.5	2.15X12	*	*
90/90-12	6PR	59J	TL	3.5 / 90	18.4 / 467	536 / 243	40 / 2.8	2.15X12	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR		TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
80/90-10	4PR	44J	TL	3.1 / 80	15.7 / 398	353 / 160	36 / 2.5	1.85X10	*	*
90/90-10	4PR	50J	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	*	*
100/90-10		56J	TL	3.9 / 101	17.0 / 434	494 / 224	36 / 2.5	2.50X10	*	*



K413

- Race-inspired tread pattern.
- Designed for performance-minded machines.
- Specially grooved to displace water on road.
- Available in 18 popular sizes.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	* *
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	* *
90/90-10	4PR	50J	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	* *
100/80-10	4PR	52J	TL	4.0 / 101	16.3 / 414	441 / 200	36 / 2.5	2.50X10	* *
100/80-10	4PR	53M	TL	4.0 / 101	16.3 / 414	541 / 206	36 / 2.5	2.50X10	* *
100/90-10	4PR	56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	* *
100/90-10	6PR	59J	TL	4.0 / 101	17.1 / 434	536 / 243	40 / 2.8	2.50X10	* *
110/80-10	4PR	58J	TL	4.3 / 109	16.9 / 430	520 / 236	36 / 2.5	2.50X10	* *
120/90-10		57J/M	TL	4.7 / 119	18.5 / 470	506 / 230	25 / 1.75	2.75X10	* *
120/90-10	4PR	66M	TL	4.7 / 119	18.5 / 470	661 / 300	36 / 2.5	2.75X10	* *
130/70-10	4PR	52J	TL	5.1 / 129	17.2 / 436	441 / 200	33 / 2.3	3.50X10	* *
130/90-10		61J	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	* *
110/70-12	4PR	47J	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	* *
110/70-12	6PR	56M	TL	4.3 / 110	18.1 / 459	494 / 224	40 / 2.8	3.00X12	* *
110/80-12	4PR	61J	TL	4.3 / 109	18.9 / 481	567 / 257	36 / 2.5	2.50X12	* *
110/90-12	4PR	64J/M/P	TL	4.3 / 109	19.8 / 503	617 / 280	36 / 2.5	2.50X12	* *
120/70-12	4PR	51J/M/P	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	* *
120/70-12	6PR	58M	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	* *
130/70-12	4PR	56J/M	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	* *
130/70-12	6PR	62J/M/P	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	* *
140/70-12	4PR	60J/M	TL	5.5 / 139	19.7 / 501	551 / 250	33 / 2.3	3.75X12	* *
140/70-12	6PR	65J	TL	5.5 / 139	19.7 / 501	639 / 290	40 / 2.8	3.75X12	* *
120/70-13	4PR	53M/L	TL	4.8 / 122	19.6 / 498	454 / 206	33 / 2.3	3.50X13	* *
130/60-13	4PR	53J/M/P	TL	5.1 / 129	19.1 / 486	454 / 206	33 / 2.3	3.50X13	* *
130/60-13	6PR	60L	TL	5.0 / 129	19.1 / 486	551 / 250	40 / 2.8	3.50X13	* *
140/60-13	4PR	57J/M/P	TL	5.5 / 139	19.6 / 498	507 / 230	33 / 2.3	3.75X13	* *
140/60-13		58P	TL	5.3 / 136	19.6 / 498	520 / 236	33 / 2.3	3.75X13	* *
140/60-13		63P	TL	5.3 / 136	19.6 / 498	600 / 272	40 / 2.8	3.75X13	* *



K415

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	* *
3.50-10	REINF	56L M+S	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	* *
90/90-10		50J M+S	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	* *
90/90-10	6PR		TL	3.5 / 90	16.4 / 416	481 / 218	40 / 2.8	2.15X10	* *
100/90-10		56J M+S	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	* *
100/90-10	REINF	61J M+S	TL	3.8 / 97	17.0 / 433	567 / 257	40 / 2.8	2.50X10	* *
120/70-10	REINF	54M M+S	TL	4.8 / 122	16.8 / 428	467 / 212	40 / 2.8	3.50X10	* *
120/90-10		57J/P M+S	TL	4.7 / 119	18.5 / 470	507 / 230	25 / 1.75	2.75X10	* *
130/90-10		61J M+S	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	* *
130/90-10		61P M+S	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	* *
120/70-11	REINF	56L M+S	TL	4.8 / 122	17.5 / 447	494 / 224	40 / 2.8	3.50X11	* *
120/70-12	4PR	51J	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	* *
120/70-12	REINF	58P M+S	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	* *
130/70-12		56J M+S	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	* *
130/70-12	REINF	62P M+S	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	* *



K418

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	6PR	47J	TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10	*	*
3.00-10	8PR	49J	TL	3.1 / 80	16.3 / 413	408 / 185	44 / 3.1	2.15X10	*	*
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	6PR	56J	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
3.50-10	8PR	58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*	*
90/90-10		50J	TL	3.5 / 90	16.3 / 416	419 / 190	36 / 2.5	2.15X10	*	*
90/90-10	REINF	55J	TL	3.4 / 86	16.5 / 418	481 / 218	44 / 3.1	2.15X10	*	*
100/90-10	4PR	56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*	*
100/90-10	REINF	61J	TL	4.0 / 101	17.1 / 434	567 / 257	44 / 3.1	2.50X10	*	*
110/90-10		62J	TL	4.2 / 109	17.7 / 452	584 / 265	36 / 2.5	2.50X10	*	*
120/70-10	4PR	48J	TL	4.8 / 122	16.6 / 422	397 / 180	33 / 2.3	3.50X10	*	*
120/70-10	REINF	54J	TL	4.8 / 122	16.6 / 422	467 / 212	40 / 2.8	3.50X10	*	*
120/80-10	6PR	58J	TL	4.7 / 119	17.6 / 446	520 / 236	36 / 2.5	2.75X10	*	*
130/70-10	REINF	59L	TL	5.0 / 127	17.2 / 438	536 / 243	40 / 2.8	3.50X10	*	*
4.00-12	4PR	64J	TL	4.1 / 105	20.4 / 517	617 / 280	36 / 2.5	2.50X12	*	*
120/70-12		58M	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	*	*
130/70-12	4PR	56J	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	*	*
130/70-12	6PR	62M	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*



K422

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-14	4PR	40P	TT	3.1 / 80	20.7 / 526	309 / 140	33 / 2.3	1.85X14	*	*



K423

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/80-10	4PR	53L/M	TL	4.0 / 101	16.3 / 414	454 / 206	36 / 2.5	2.50X10	*	*
120/70-10	6PR	54M	TL	4.8 / 122	16.6 / 422	467 / 212	40 / 2.8	3.50X10	*	*
110/70-11	4PR	45L	TL	4.3 / 110	16.9 / 430	364 / 165	33 / 2.3	2.50X11	*	*
120/70-11	REINF	56L	TL	4.80 / 122	17.59 / 447	494 / 224	40 / 2.8	3.50X11	*	*
110/70-12		47P	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*



K433F / K434

- Performance style tread pattern.
- Sport-oriented design.
- Compound designed for long wear and mileage.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	8PR	58L	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*
90/90-10		50L	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	* *
90/90-10	REINF	55L	TL	3.5 / 90	16.4 / 416	481 / 218	44 / 3.1	2.15X10	*
100/80-10		53L	TL	4.0 / 101	16.3 / 414	454 / 206	36 / 2.5	2.50X10	* *
100/90-10		56L	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	* *
100/90-10	REINF	61L	TL	4.0 / 101	17.1 / 434	567 / 257	44 / 3.1	2.50X10	*
130/70-10		59L	TL	5.1 / 129	17.2 / 436	536 / 243	40 / 2.8	3.50X10	* *
100/60-12	4PR	39J	TL	3.9 / 100	16.7 / 425	300 / 136	33 / 2.3	2.75X12	* *
110/70-12	REINF	47L	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	* *
110/80-12	REINF	65J	TL	4.3 / 109	18.9 / 481	639 / 290	40 / 2.8	2.50X12	* *
120/70-12	4PR	51J	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	* *
120/70-12		56J/L	TL	4.8 / 122	18.6 / 473	494 / 224	40 / 2.8	3.50X12	* *
130/70-12		56L	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	* *
130/70-12	REINF	62M	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	* *
80/90-14	4PR	40P	TT/TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14	* *
90/90-14		46P	TL	3.5 / 90	20.4 / 518	375 / 170	33 / 2.3	2.15X14	* *
100/80-14	4PR	48S	TL	3.9 / 100	20.3 / 516	397 / 180	33 / 2.3	2.50X14	* *
100/80-14		48L	TL	4.0 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	* *
120/70-14		55P/S	TL	4.8 / 122	20.6 / 524	481 / 218	33 / 2.3	3.50X14	* *
120/70-14	6PR	61P	TL	4.8 / 122	20.6 / 524	567 / 257	40 / 2.8	3.50X14	* *
120/80-14		58P/S	TL	4.7 / 119	21.6 / 548	520 / 236	33 / 2.3	2.75X14	* *
120/70-15	4PR	56S	TL	4.8 / 122	21.6 / 549	494 / 224	33 / 2.3	3.50X15	* *
120/70-16	4PR	57P	TL	4.8 / 122	22.6 / 574	507 / 230	33 / 2.3	3.50X16	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/70-12		62J	TL	5.10 / 129	19.20 / 487	584 / 265	40 / 2.8	3.50X12	* *
140/70-13		61P	TL	5.60 / 141	20.70 / 526	567 / 257	33 / 2.3	3.75X13	* *
150/70-13		64S	TL	5.90 / 151	21.30 / 540	617 / 280	33 / 2.3	4.25X13	* *
90/90-14	4PR	46P	TT/TL	3.50 / 90	20.40 / 518	375 / 170	33 / 2.3	2.15X14	* *
100/80-14		48P	TL	4.00 / 101	20.30 / 516	397 / 180	33 / 2.3	2.50X14	*
100/90-14	4PR	51P	TL	3.97 / 101	21.10 / 536	430 / 195	33 / 2.3	2.50X14	* *
100/90-14		57P	TL	3.97 / 101	21.10 / 536	507 / 230	40 / 2.8	2.50X14	* *
120/70-14	REINF	61P	TL	4.80 / 122	20.70 / 528	567 / 257	40 / 2.8	3.50X14	* *
150/70-14	4PR	66S	TL	5.90 / 151	22.30 / 566	661 / 300	33 / 2.3	4.25X14	* *
140/70-15	6PR	69P	TL	5.50 / 139	22.70 / 577	716 / 325	40 / 2.3	3.75X15	* *
90/90-16	4PR	48P	TL	3.54 / 90	22.36 / 568	397 / 180	33 / 2.3	2.15X16	* *



K438

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*
3.50-10	REINF	58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*
90/90-10	REINF	55J	TL	3.5 / 90	16.4 / 416	480 / 218	40 / 2.8	2.15X10	*
100/90-10	4PR	56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*
100/90-10	6PR	59J	TL	4.0 / 101	17.1 / 434	536 / 243	40 / 2.8	2.50X10	*
100/90-10	REINF	61J	TL	4.0 / 101	17.1 / 434	567 / 257	40 / 2.8	2.50X10	*



K6005

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-10	4PR	46J	TL	3.1 / 80	16.3 / 414	375 / 170	33 / 2.3	1.85X10	*
3.50-10		51J	TT/TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*
3.50-10	6PR	56J	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*
3.50-12	4PR	57J	TT	3.6 / 92	19.2 / 488	507 / 230	36 / 2.5	2.50X12	*

**K6007****FRONT**

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-13	48L/P	TL	4.3 / 110	19.0 / 484	397 / 180	33 / 2.3	3.00X13	*	*
120/70-13	53P	TL	4.4 / 113	19.6 / 498	454 / 206	33 / 2.3	3.00X13	*	*
110/70-14	50P	TL	4.3 / 110	20.1 / 510	419 / 190	33 / 2.3	3.00X14	*	*
100/80-14	48P	TL	4.0 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	*	*
110/80-14	53P	TL	4.3 / 109	21.0 / 532	454 / 206	33 / 2.3	2.50X14	*	*
110/80-14	REINF 59S	TL	4.3 / 109	21.0 / 532	536 / 243	40 / 2.8	2.50X14	*	*
120/70-15	56P	TL	4.8 / 122	21.6 / 549	494 / 224	33 / 2.3	3.50X15	*	*

**REAR**

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/70-13	57P	TL	5.2 / 132	20.4 / 519	507 / 230	33 / 2.3	3.50X13	*	*
130/70-13	REINF 63P	TL	5.1 / 130	20.3 / 516	600 / 272	40 / 2.8	3.50X13	*	*
140/70-13	61P	TL	5.5 / 139	20.7 / 526	567 / 257	33 / 2.3	3.75X13	*	*
100/80-14	48P	TL	3.9 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	*	*
120/70-14	REINF 61P	TL	4.8 / 122	20.6 / 524	567 / 257	40 / 2.8	3.50X14	*	*
140/70-14	62P	TL	5.5 / 139	21.7 / 550	584 / 265	33 / 2.3	3.75X14	*	*
140/70-14	62S	TL	5.5 / 139	21.7 / 550	584 / 265	33 / 2.3	3.75X14	*	*

**K6010****FRONT**

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-10	56J/L	TL	3.9 / 101	17.0 / 434	494 / 224	36 / 2.5	2.50X10	*	*

**REAR**

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-10	50J	TL	3.5 / 90	16.3 / 416	419 / 190	36 / 2.5	2.15X10	*	*



K6011

- Excellent wet and dry grip.
- Suitable for front and rear applications.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10		58M TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*	*
90/90-10	REINF	55M TL	3.5 / 90	16.3 / 416	481 / 218	44 / 3.1	2.15X10	*	*
100/90-10	REINF	61M TL	3.9 / 101	17.0 / 434	567 / 257	44 / 3.1	2.50X10	*	*



K6016

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12	4PR	51M TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	*	*
130/70-12	4PR	56M TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	*	*



K6020

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.50-10	4PR	51J TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
90/100-10		53J TL	3.5 / 90	17.1 / 434	454 / 206	36 / 2.5	2.15X10	*	*
100/90-10		56J TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*	*
90/90-12		54J TL	3.5 / 90	18.4 / 467	367 / 212	36 / 2.5	2.15X12	*	*



K6021

- Extra low rolling resistance.
- Excellent wet weather performance.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	6PR	47J TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10	*	*
3.00-10	8PR	49J TL	3.1 / 80	16.3 / 413	408 / 185	44 / 3.1	2.15X10	*	*
3.50-10	6PR	56J TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
3.50-10	8PR	58J TL	3.6 / 92	17.2 / 437	520 / 236	43 / 3.0	2.50X10	*	*
90/90-10	6PR	55J TL	3.5 / 90	16.4 / 416	481 / 218	40 / 2.8	2.15X10	*	*
90/90-12	6PR	59J TL	3.5 / 90	18.4 / 467	536 / 243	40 / 2.8	2.15X12	*	*



K6022 KOZMIK

- Dual compound for increased cornering traction and improved mileage.
- All-weather performance tread for uncompromising grip in all conditions.
- Long-wearing compound provides increased mileage without sacrificing performance.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	51J	TL	3.7 / 94	17.2 / 436	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	58M	TL	3.7 / 94	17.1 / 435	520 / 236	44 / 3.1	2.50X10		*
90/90-10	50J	TL	3.7 / 94	16.6 / 421	419 / 190	36 / 2.5	2.15X10	*	*
90/90-10	55M	TL	3.7 / 94	16.5 / 418	481 / 218	44 / 3.1	2.15X10		*
90/100-10	53 J	TL	3.5 / 90	17.0 / 433	454 / 206	36 / 2.5	2.15X10		*
100/90-10	56J	TL	4.1 / 105	17.5 / 444	494 / 224	36 / 2.5	2.50X10	*	*
100/90-10	61M	TL	4.1 / 105	17.3 / 439	567 / 257	44 / 3.1	2.50X10		*
90/90-12	44J	TL	3.5 / 90	18.3 / 465	352 / 160	25 / 1.75	2.15X12		*
110/70-12	47L	TL	4.3 / 110	18.0 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12	51L	TL	4.8 / 122	18.4 / 468	430 / 195	33 / 2.3	3.50X12	*	*
130/70-12	56L	TL	5.0 / 129	19.0 / 483	494 / 224	33 / 2.3	3.50X10	*	*
110/70-13	55P	TL	4.3 / 110	19.1 / 484	481 / 218	40 / 2.8	3.00X13		*
120/70-13	53P	TL	4.8 / 122	19.6 / 497	454 / 206	33 / 2.3	3.50X13		*
130/70-13	57P	TL	5.1 / 129	20.2 / 512	507 / 230	33 / 2.3	3.50X13		*
140/70-13	61P	TL	5.5 / 139	20.7 / 526	567 / 257	33 / 2.3	3.75X13		*
80/90-14	40P	TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14		*
90/90-14	46P	TL	3.5 / 90	20.4 / 518	375 / 170	33 / 2.3	2.15X14		*
110/80-14	53P	TL	4.3 / 109	21.0 / 532	454 / 206	33 / 2.3	2.50X14		*

K6028



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	58M	TL	3.7 / 94	17.2 / 437	520 / 236	44 / 3.1	2.50X10		*
90/90-10	55M	TL	3.5 / 90	16.4 / 416	481 / 218	44 / 3.1	2.15X10		*
100/90-10	61M	TL	4.0 / 101	17.1 / 434	567 / 257	44 / 3.1	2.50X10		*
80/90-14	4PR 40P	TT/TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14		*
90/90-14	4PR 46P	TT/TL	3.5 / 90	20.4 / 518	375 / 170	33 / 2.3	2.15X14		*
100/80-14	4PR 48P	TL	4.0 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14		*

K6032

FRONT



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-12	59J	TL	4.0 / 101	19.1 / 485	536 / 243	36 / 2.5	2.50X12		*

REAR



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-12	64J	TL	4.3/109	20.0/503	617 / 280	36 / 2.5	2.50X12		*



K6033

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-13	REINF 59P	TL	4.8 / 122	19.6 / 498	536 / 243	40 / 2.8	3.50X13	*	*
110/80-14	53P	TL	4.3 / 109	21.1 / 536	454 / 206	33 / 2.3	2.50X14	*	*
120/70-15	56S	TL	4.8 / 122	21.6 / 549	494 / 224	36 / 2.5	3.50X15	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/70-13	REINF 63P	TL	5.0 / 129	20.3 / 515	600 / 272	40 / 2.8	3.50X13	*	*
130/70-14	61P	TL	5.0 / 129	21.2 / 538	567 / 257	33 / 2.3	3.50X14	*	*
140/70-14	68S	TL	5.5 / 139	21.7 / 552	694 / 315	44 / 3.1	3.75X14	*	*



K6035

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-12	59J	TL	4.0 / 101	19.1 / 485	536 / 243	36 / 2.5	2.50X12	*	*
110/90-12	64J	TL	4.3 / 109	20.0 / 503	617 / 280	36 / 2.5	2.50X12	*	*
120/70-13	53P	TL	4.5 / 115	19.6 / 498	454 / 206	33 / 2.3	3.00X13	*	*
130/70-13	57P	TL	5.2 / 132	20.5 / 520	507 / 230	33 / 2.3	3.50X13	*	*



K6036

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/80-14	53P	TL	4.3 / 109	21.1 / 536	507 / 230	33 / 2.3	2.50X14	*	*
120/80-14	58P	TL	4.7 / 119	21.6 / 548	520 / 236	33 / 2.3	2.75X14	*	*
130/70-14	61P	TL	5.0 / 129	21.2 / 538	520 / 236	33 / 2.3	3.50X14	*	*
100/80-16	50P	TL	4.0 / 101	22.3 / 566	419 / 190	33 / 2.3	2.50X16	*	*



K6037

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-12	47L	TL	4.1 / 104	18.0 / 458	386 / 175	33 / 2.3	2.50X12	*	*
120/70-12	51L	TL	4.5 / 114	18.6 / 472	430 / 195	33 / 2.3	3.00X12	*	*



K6038

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-12	47L	TL	4.3 / 110	18.1 / 460	386 / 175	33 / 2.3	3.00X12	*	
120/70-12	51M	TL	4.8 / 122	18.3 / 467	430 / 195	33 / 2.3	3.50X12	*	
110/70-13	48L	TL	4.3 / 110	19.0 / 484	397 / 180	33 / 2.3	3.00X13	*	
120/70-13	53P	TL	4.4 / 113	19.6 / 498	454 / 206	33 / 2.3	3.00X13	*	



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12 REINF	58M	TL	4.5 / 116	18.5 / 472	430 / 195	40 / 2.8	3.00X12	*	
130/70-12 REINF	62M	TL	5.0 / 129	19.1 / 487	584 / 265	40 / 2.8	3.50X12	*	
130/70-13 REINF	63P	TL	5.2 / 132	20.4 / 519	600 / 272	40 / 2.8	3.50X13	*	



K6039

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/90-14	40P	TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14		*
90/90-14	46P	TL	3.5 / 90	20.4 / 518	375 / 170	33 / 2.3	2.15X14		*



K6039A

SIZE		SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/80-14	REINF	43S	TL	3.1 / 80	19.1 / 486	342 / 155	42 / 2.9	1.85X14		*
90/80-14		43S	TL	3.5 / 90	19.7 / 500	342 / 155	33 / 2.3	2.15X14		*



K6338

SIZE		SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-10		50L	TL	3.5 / 88	16.4 / 417	419 / 190	36 / 2.5	2.15X10	*	*
90/90-12		54J	TL	3.5 / 90	18.4 / 467	467 / 212	36 / 2.5	2.15X12	*	*
110/70-12		47L	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-13		59S	TL	4.8 / 122	19.6 / 498	536 / 243	44 / 3.1	3.50X13	*	*
100/80-14	REINF	54P	TL	4.0 / 101	20.3 / 516	467 / 212	40 / 2.8	2.50X14		*
120/80-14		58S	TL	4.7 / 119	21.6 / 548	520 / 236	36 / 2.5	3.00X14	*	*



K6339

SIZE		SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-10		56L	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.3	2.50X10	*	*
120/70-12		51L	TL	4.8 / 122	18.5 / 470	430 / 190	33 / 2.3	3.50X12	*	*
130/70-12		56L	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	*	*
150/70-13		64S	TL	5.9 / 150	21.2 / 540	617 / 280	36 / 2.5	4.00X13		*
120/70-14		61P	TL	4.8 / 122	20.6 / 524	467 / 257	40 / 2.8	3.50X14		*



K700A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	8PR	58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*	*
90/90-10	REINF	55J	TL	3.5 / 90	16.4 / 416	481 / 218	44 / 3.1	2.15X10	*	*
100/90-10	REINF	61J	TL	4.0 / 101	17.1 / 434	567 / 257	44 / 3.1	2.50X10	*	*



K700

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	REINF	58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*	*
90/100-10	6PR	58J	TL	3.5 / 90	17.0 / 434	520 / 236	40 / 2.8	2.15X10	*	*
100/90-10		56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.3	2.50X10	*	*
100/90-10		61J	TL	4.1 / 103	17.1 / 434	567 / 257	44 / 3.1	2.50X10	*	*
110/70-12		47L	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12	REINF	58M	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	*	*
130/70-12	REINF	62M	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*



K702

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-12	4PR	59J	TL	4.0 / 101	19.1 / 485	536 / 243	36 / 2.5	2.50X12	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	4PR	51L	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
90/90-10		50L	TL	3.5 / 90	16.4 / 416	419 / 190	36 / 2.5	2.15X10	*	*
100/90-10		56L	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*	*
90/90-12		54J	TL	3.5 / 90	18.4 / 467	467 / 212	36 / 2.5	2.15X12	*	*
110/70-12		47L	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12		51L	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	*	*
120/80-12		65J	TL	4.7 / 119	19.6 / 497	639 / 290	36 / 2.5	2.75X12	*	*
130/70-12		56L	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	*	*



K705

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*
3.50-10		58J	TL	3.6 / 92	17.2 / 437	520 / 236	44 / 3.1	2.50X10	*
100/90-10		56J	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*



K711

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-12		47L	TL	4.0 / 104	18.3 / 465	386 / 175	33 / 2.3	2.50X12	* *
120/70-12		51M	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	* *
120/70-13		53P	TL	4.5 / 116	19.6 / 500	454 / 206	33 / 2.3	3.00X13	* *
130/60-13	REINF	60P	TL	5.0 / 129	19.1 / 486	551 / 250	40 / 2.8	3.50X13	* *
100/80-14		48P	TL	4.0 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	* *
120/80-14		58S	TL	4.6 / 119	21.5 / 548	520 / 236	36 / 2.5	3.00X14	* *
120/70-15	4PR	56P	TL	4.8 / 122	21.6 / 549	494 / 224	33 / 2.3	3.50X15	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10		47L	TL	3.1 / 80	16.2 / 413	386 / 175	40 / 2.8	2.15X10	* *
3.50-10		56L	TL	3.7 / 94	17.2 / 437	494 / 224	40 / 2.8	2.50X10	* *
90/90-10		50J	TL	2.9 / 90	16.3 / 416	419 / 190	36 / 2.5	2.15X10	* *
100/80-10		53M	TL	3.9 / 101	16.2 / 414	454 / 206	36 / 2.5	2.50X10	* *
100/90-10		56J	TL	3.9 / 101	17.0 / 434	494 / 224	36 / 2.5	2.50X10	* *
120/70-10		54M	TL	4.8 / 122	16.6 / 422	467 / 212	40 / 2.8	3.50X10	* *
110/80-12		61L	TL	4.3 / 109	18.8 / 477	567 / 257	36 / 2.5	2.50X12	* *
120/70-12		51L	TL	4.5 / 116	18.5 / 472	430 / 195	33 / 2.3	3.00X12	* *
120/70-12	REINF	58M	TL	4.5 / 116	18.5 / 472	430 / 195	33 / 2.3	3.00X12	* *
130/70-12	REINF	62M	TL	5.0 / 129	19.1 / 487	584 / 265	40 / 2.8	3.50X12	* *
140/70-12	REINF	65P	TL	5.3 / 135	19.7 / 501	639 / 290	40 / 2.8	3.50X12	* *
130/60-13		60P	TL	5.1 / 129	19.1 / 486	551 / 250	40 / 2.8	3.50X13	* *
130/70-13		57P	TL	5.1 / 132	20.4 / 519	507 / 230	33 / 2.3	3.50X13	* *
140/60-13	REINF	63S	TL	5.4 / 139	19.6 / 498	600 / 272	40 / 2.8	3.75X13	* *
150/70-13		64S	TL	5.9 / 150	21.2 / 540	617 / 280	36 / 2.5	4.00X13	* *
120/70-14		55P	TL	4.8 / 122	20.6 / 524	481 / 218	33 / 2.3	3.50X14	* *
140/60-14		64P	TL	5.5 / 139	20.6 / 524	617 / 280	40 / 2.8	3.75X14	* *



K763

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12	4PR	51P	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	*	*
120/70-12	REINF	58P	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	*	*
110/90-13	4PR	56P	TL	4.3 / 109	20.8 / 528	494 / 224	33 / 2.3	2.50X13	*	*
120/70-14	4PR	55P/S	TL	4.8 / 122	20.6 / 524	481 / 218	33 / 2.3	3.50X14	*	*
100/80-16	4PR	50P	TL	4.0 / 101	22.3 / 566	419 / 190	33 / 2.3	2.50X16	*	*
100/80-16	6PR	56P	TL	4.0 / 101	22.3 / 566	494 / 224	40 / 2.8	2.50X16	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/70-12	6PR	62P	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*
130/70-13	4PR	57M	TL	5.1 / 129	20.2 / 512	507 / 230	33 / 2.3	3.50X13	*	*
130/70-13	6PR	63P	TL	5.1 / 129	20.2 / 512	600 / 272	40 / 2.8	3.50X13	*	*
120/80-14		58P	TL	4.7 / 119	21.6 / 548	520 / 236	33 / 2.3	2.75X14	*	*
140/60-14	6PR	64S	TL	5.5 / 139	20.6 / 524	617 / 280	33 / 2.3	3.75X14	*	*
110/70-16	4PR	52P	TL	4.3 / 110	22.0 / 560	441 / 200	33 / 2.3	3.00X16	*	*
120/80-16	4PR	60P	TL	4.7 / 119	23.5 / 598	551 / 250	33 / 2.3	2.75X16	*	*
130/80-16	4PR	64P	TL	5.1 / 129	24.2 / 614	617 / 280	33 / 2.3	3.00X16	*	*



K764

- Designed for long wear and confident grip.
- Aggressive tread pattern for optimal tracking in wet or dry weather conditions.
- Available in 11 popular sizes.

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-12	4PR	47J/L	TL	4.2 / 107	18.4 / 467	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12	4PR	51M/P	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	*	*
120/70-14	4PR	55L/P/S	TL	4.8 / 122	20.6 / 524	481 / 218	33 / 2.3	3.50X14	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/90-10	4PR	66M	TL	4.7 / 119	18.5 / 470	661 / 300	36 / 2.5	2.75X10	*	*
130/90-10		61M	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	*	*
110/80-12	4PR	61J	TL	4.3 / 109	18.9 / 481	567 / 257	36 / 2.5	2.50X12	*	*
130/70-12	4PR	56M	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	*	*
130/70-12	6PR	62P	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*
140/70-12	4PR	60M	TL	5.5 / 139	19.7 / 501	551 / 250	33 / 2.3	3.75X12	*	*
140/70-12	REINF	65J	TL	5.5 / 139	19.7 / 501	639 / 290	40 / 2.8	3.75X12	*	*
130/60-13	4PR	53M	TL	5.1 / 129	19.1 / 486	454 / 206	33 / 2.3	3.50X13	*	*
130/60-13	4PR	53P	TL	5.1 / 129	19.1 / 486	454 / 206	33 / 2.3	3.50X13	*	*
140/60-13	4PR	57M/P	TL	5.5 / 139	19.6 / 498	507 / 230	33 / 2.3	3.75X13	*	*
140/60-14	6PR	64P/S	TL	5.5 / 139	20.6 / 524	617 / 280	33 / 2.3	3.75X14	*	*
140/70-14	4PR	62L	TL	5.5 / 139	21.7 / 552	584 / 265	33 / 2.3	3.75X14	*	*
140/70-14	6PR	68S	TL	5.5 / 139	21.7 / 552	694 / 315	40 / 2.8	3.75X14	*	*



K761

- Perfect for dual sport applications.
- 70% street, 30% dirt.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/80-10	4PR	58M	TL	4.3 / 109	16.9 / 430	520 / 236	36 / 2.5	2.50X10	* *
110/90-10	4PR	62J	TL	4.3 / 109	17.8 / 452	584 / 265	36 / 2.5	2.50X10	* *
110/90-10	6PR	66J	TL	4.3 / 109	17.8 / 452	661 / 300	40 / 2.8	2.50X10	*
120/90-10	4PR	57J/M	TL	4.7 / 119	18.5 / 470	507 / 230	25 / 1.75	2.75X10	* *
120/90-10		66M	TL	4.7 / 119	18.5 / 470	661 / 300	36 / 2.5	2.75X10	* *
130/90-10		61J	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	* *
150/80-10		65L	TL	5.9 / 150	19.4 / 494	639 / 290	25 / 1.75	3.50X10	* *
110/70-12	4PR	47J	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	* *
110/90-12	4PR	64J	TL	4.3 / 109	19.8 / 503	617 / 280	36 / 2.5	2.50X12	* *
120/70-12	4PR	51J/M/L	TL	4.8 / 122	18.6 / 473	430 / 195	33 / 2.3	3.50X12	* *
120/70-12	REINF	58P M+S	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	* *
120/80-12	4PR	65J/M	TL	4.7 / 119	19.6 / 497	639 / 290	36 / 2.5	2.75X12	* *
130/70-12	4PR	56J/M	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	* *
130/70-12	4PR	56L	TL	5.1 / 129	19.2 / 487	494 / 224	33 / 2.3	3.50X12	* *
130/70-12	REINF	62P M+S	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	* *
130/80-12	4PR	69J	TL	5.1 / 129	20.2 / 513	716 / 325	36 / 2.5	3.00X12	* *
140/70-12	4PR	60J/M	TL	5.5 / 139	19.7 / 501	551 / 250	33 / 2.3	3.75X12	* *
130/60-13	4PR	53J M+S	TL	5.1 / 129	19.1 / 486	454 / 206	33 / 2.3	3.50X13	* *
130/60-13	4PR	53M	TL	5.1 / 129	19.1 / 486	454 / 206	33 / 2.3	3.50X13	* *
140/60-13	4PR	57J M+S	TL	5.5 / 139	19.6 / 498	507 / 230	33 / 2.3	3.75X13	* *
140/60-13	4PR	57M	TL	5.5 / 139	19.6 / 498	507 / 230	33 / 2.3	3.75X13	* *
130/70-13	REINF	63P	TL	5.1 / 129	20.2 / 514	600 / 272	40 / 2.8	3.50X13	*



K784 BIG BLOCK

- Deep lugs help take your Honda Grom, Monkey or Kawasaki Z125 to places it's never been before.
- Superior puncture resistance, tread wear, and all-terrain handling.
- 50/50 street/dirt application.
- DOT and E-mark approved.



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12	51P	TL	4.8 / 122	18.6 / 473	195 / 430	33 / 2.3	3.50X12	* *	

REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/70-12	56P	TL	5.0 / 129	19.1 / 487	224 / 494	33 / 2.3	3.50X12	* *	





SCOOTER DUAL PURPOSE



K6021X

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	42J	TL	3.1 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*



K6339

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	42J	TL	3.1 / 80	16.2 / 411	331 / 150	36 / 2.5	2.15X10	*	*
60/100-10	33J	TL	2.4 / 60	14.7 / 374	254 / 115	36 / 2.5	1.40X10	*	*



K6603

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	47J	TL	3.1 / 80	16.4 / 416	386 / 175	40 / 2.8	2.15X10	*	*
60/100-10	33J	TL	2.4 / 60	14.7 / 374	254 / 115	36 / 2.5	1.40X10	*	*



K701

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-12	54J	TL	3.54 / 90	18.4 / 467	467 / 212	36 / 2.50	2.15X12	*	*



K7009

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-8	31J	TL	2.8 / 71	13.7 / 348	240 / 109	36 / 2.5	1.75X8	*	*
3.00-10(14X3.2)	42J	TL	3.2 / 82	16.4 / 416	331 / 150	36 / 2.5	2.15X10		*
3.00-10(14X3.2)	47J	TL	3.5 / 80	16.4 / 417	386 / 175	40 / 2.8	2.15X10		*
2.75-10	37J	TL	2.8 / 71	15.7 / 399	282 / 128	36 / 2.5	1.75X10		*
2.75-10	42J	TL	2.8 / 71	15.7 / 399	331 / 150	40 / 2.8	1.75X10		*
80/90-10	44J	TL	3.1 / 80	15.6 / 396	353 / 160	36 / 2.5	1.85X10	*	*
90/90-12	54J	TL	3.5 / 90	18.5 / 470	467 / 212	36 / 2.5	2.15X12		*



K7025

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	42J	TL	3.5 / 80	16.3 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	47J	TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10	*	*
3.50-10	56J	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
3.00-12	47J	TT	3.1 / 80	18.3 / 464	386 / 175	36 / 2.5	2.15X12		*
3.50-12	54J	TT	3.6 / 92	19.2 / 488	507 / 230	36 / 2.5	2.50X12		*



K7028

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-10	50J	TL	3.5 / 90	16.4 / 416	419 / 190	33 / 2.3	2.15X10		*
100/90-12	59J	TL	3.9 / 100	19.0 / 482	536 / 243	36 / 2.5	2.50X12		*
110/70-12	REINF 56M	TL	4.3 / 110	18.1 / 460	494 / 224	40 / 2.8	3.00X12		*
110/70-13	REINF 55P	TL	4.3 / 110	19.1 / 485	481 / 218	40 / 2.8	3.00X13	*	*
100/80-14	48P	TL	3.9 / 99	20.2 / 514	397 / 180	33 / 2.3	2.50X14	*	*



K7029

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-13	48L	TL	4.1 / 103	19.2 / 488	397 / 180	33 / 2.3	2.75X13	*	*



K7030

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/70-12	51L	TL	4.4 / 111	18.7 / 474	430 / 195	33 / 2.3	2.75X12	*	*



K7033

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-10	50L	TL	3.5 / 90	16.4 / 416	419 / 190	33 / 2.3	2.15X10	*	*
100/90-12	59J	TL	4.0 / 101	19.1 / 485	536 / 243	36 / 2.5	2.50X12	*	*
100/80-14	48P	TL	4.0 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-10	56L	TL	4.0 / 101	17.1 / 434	494 / 224	36 / 2.5	2.50X10	*	*
110/70-12	56M	TL	4.3 / 110	18.1 / 459	494 / 224	40 / 2.8	3.00X12	*	*
110/70-13	55P	TL	4.3 / 110	19.1 / 484	481 / 218	40 / 2.8	3.00X13	*	*



K333 WHITEWALL

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	4PR	42J	TT	3.1 / 80	16.2 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	4PR	50J	TT	3.1 / 80	16.2 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	4PR	42J	TL	3.1 / 80	16.2 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.00-10	4PR	50J	TL	3.1 / 80	16.2 / 413	331 / 150	36 / 2.5	2.15X10	*	*
3.50-10	4PR	51J	TT	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
3.50-10	4PR	51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*

* Please note the whitewall tires are only available from Shanghai, China plant.



K418 WHITEWALL

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-10		51J	TL	3.6 / 92	17.2 / 437	430 / 195	36 / 2.5	2.50X10	*	*
90/90-10		50J	TL	2.9 / 90	16.3 / 416	419 / 190	36 / 2.5	2.15X10	*	*
120/70-10		54M	TL	4.8 / 122	16.6 / 422	467 / 212	40 / 2.8	3.50X10	*	*
110/70-12		47P	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12		58M	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	*	*
130/70-12		62M	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*

* Please note the whitewall tires are only available from Shanghai, China plant.



K701 WINTER TIRE

- Unique compound for cold weather traction.
- Tread and sipes designed for improved traction in wintery conditions.
- DOT and E-Mark compliant.

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-10	REINF	47L M+S	TL	3.1 / 80	16.3 / 413	386 / 175	40 / 2.8	2.15X10	*	*
3.50-10	REINF	56L M+S	TL	3.6 / 92	17.2 / 437	494 / 224	40 / 2.8	2.50X10	*	*
100/80-10		53P M+S	TL	4.0 / 101	16.3 / 414	454 / 206	36 / 2.5	2.50X10	*	*
100/90-10		61J M+S	TL	4.0 / 101	17.1 / 434	567 / 257	44 / 3.1	2.50X10	*	*
120/70-10		54L M+S	TL	4.8 / 122	16.6 / 422	467 / 212	40 / 2.8	3.50X10	*	*
120/90-10		57P M+S	TL	4.7 / 119	18.5 / 470	507 / 230	25 / 1.75	2.75X10	*	*
130/90-10		61P M+S	TL	5.1 / 129	19.2 / 488	567 / 257	25 / 1.75	3.00X10	*	*
110/70-11		45M M+S	TL	4.3 / 110	17.0 / 433	364 / 165	33 / 2.3	3.00X11	*	*
120/70-11	REINF	56L M+S	TL	4.8 / 122	17.5 / 447	494 / 224	40 / 2.8	3.50X11	*	*
110/70-12		47P M+S	TL	4.3 / 110	18.1 / 459	386 / 175	33 / 2.3	3.00X12	*	*
120/70-12	REINF	58P M+S	TL	4.8 / 122	18.6 / 473	520 / 236	40 / 2.8	3.50X12	*	*
130/70-12	REINF	62P M+S	TL	5.1 / 129	19.2 / 487	584 / 265	40 / 2.8	3.50X12	*	*
130/60-13	REINF	60P M+S	TL	5.1 / 129	19.1 / 486	551 / 250	40 / 2.8	3.50X13	*	*
140/60-13		63P M+S	TL	5.3 / 137	19.6 / 498	599 / 272	40 / 2.8	3.75X13	*	*
150/70-13		64S M+S	TL	5.9 / 150	21.2 / 538	617 / 280	36 / 2.5	4.00X13	*	*
120/70-14		55S M+S	TL	4.8 / 122	20.6 / 524	481 / 218	38 / 2.6	3.50X14	*	*
120/80-14		58S M+S	TL	4.7 / 119	21.6 / 548	520 / 236	38 / 2.6	2.75X14	*	*
140/70-14	REINF	68S M+S	TL	5.5 / 139	21.7 / 552	694 / 315	40 / 2.8	3.75X14	*	*
120/70-15		56S M+S	TL	4.8 / 122	21.6 / 549	494 / 224	38 / 2.6	3.50X15	*	*
100/80-16		50P M+S	TL	4.0 / 101	22.3 / 566	419 / 190	33 / 2.3	2.50X16	*	*
110/70-16		52P M+S	TL	4.3 / 110	22.0 / 560	441 / 200	33 / 2.3	3.00X16	*	*
120/80-16		60P M+S	TL	4.7 / 119	23.5 / 598	551 / 250	33 / 2.3	2.75X16	*	*
100/80-17		52R M+S	TL	4.0 / 101	23.3 / 592	441 / 200	36 / 2.5	2.50X17	*	*
110/70-17		54H M+S	TL	4.3 / 110	23.1 / 586	467 / 212	42 / 2.9	3.00X17	*	*
130/70-17		62R M+S	TL	5.1 / 129	24.2 / 614	584 / 265	36 / 2.5	3.50X17	*	*



K252 WHITEWALL

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-16	4PR	31L	TT	2.4 / 61	20.9 / 530	240 / 109	33 / 2.3	1.60X16	*	*
2.25-17	4PR	33L	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.25-19	4PR	37L	TT	2.4 / 61	23.9 / 607	282 / 128	33 / 2.3	1.60X19	*	*
2.50-19	4PR	41P	TT	2.6 / 65	24.4 / 619	375 / 170	33 / 2.3	1.60X19	*	*



K265 WHITEWALL

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*



K418 WHITEWALL

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	41P	TT / TL		3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*

* Please note the whitewall tires are only available from Shanghai, China plant.



K201

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33L	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*



K202

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
2.50-17	4PR	38P	TT/TL	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*



K203

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
2.50-18	4PR	40P	TT	2.6 / 65	23.3 / 593	309 / 140	33 / 2.3	1.60X18	*	*
2.50-18	6PR	45P	TT	2.6 / 65	23.3 / 593	364 / 165	40 / 2.8	1.60X18		*



K204

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
3.00-16	4PR	43P	TT	3.1 / 80	22.7 / 576	342 / 155	33 / 2.3	1.85X16	*	*
2.75-17	4PR	41P	TT/TL	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
3.00-19	4PR	49P	TT	3.1 / 80	25.9 / 658	408 / 185	33 / 2.3	1.85X19	*	*



K205

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
2.75-18	6PR	48P	TT	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18		*



K208

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33P	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17		*
2.50-17	8PR	45P	TT	2.6 / 65	22.4 / 568	364 / 165	44 / 3.1	1.60X17		*
2.50-18	4PR	40P	TT	2.6 / 65	23.3 / 593	309 / 140	33 / 2.3	1.60X18		*
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
2.75-18	6PR	48P	TT/TL	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18		*



K252

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33L	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17		*
2.50-17	8PR	45P	TT	2.6 / 65	22.4 / 568	364 / 165	44 / 3.1	1.60X17		*
2.50-19	4PR	41P	TT	2.6 / 65	24.4 / 619	375 / 170	33 / 2.3	1.60X19	*	*



K254

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TT/TL	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT/TL	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17	*	*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*



K255

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-16	4PR	43P	TT	3.1 / 80	22.7 / 576	342 / 155	33 / 2.3	1.85X16	*	*
3.00-16	6PR	48P	TT	3.1 / 80	22.7 / 576	408 / 185	40 / 2.8	1.85X16		*
3.25-16	4PR	49P	TT	3.5 / 89	23.1 / 588	408 / 185	33 / 2.3	2.15X16	*	*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17	*	*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18		*



K265

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
3.25-17	4PR	50P	TT	3.5 / 89	24.2 / 614	419 / 190	33 / 2.3	2.15X17	*	*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
3.00-18	8PR	55P	TT	3.1 / 80	24.7 / 627	481 / 218	44 / 3.1	1.85X18		*
3.25-18	4PR	52P	TT	3.5 / 89	25.2 / 639	441 / 200	33 / 2.3	2.15X18	*	*
3.50-18	4PR	56P	TT	3.7 / 93	25.6 / 649	494 / 224	33 / 2.3	2.15X18	*	*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
3.00-19	4PR	49P	TT	3.1 / 80	25.9 / 658	408 / 185	33 / 2.3	1.85X19	*	*
3.50-19	4PR	57P	TT	3.7 / 93	26.6 / 675	507 / 230	33 / 2.3	2.15X19	*	*



K266A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-17	4PR	38P	TT/TL	2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17	4PR	44S	TL	3.1 / 80	22.8 / 579	353 / 160	36 / 2.5	1.85X17	*	*



K270A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-14	4PR	40P	TT	3.1 / 80	20.7 / 526	309 / 140	33 / 2.3	1.85X14	*	*
3.00-14	6PR	45P	TT	3.1 / 80	20.7 / 526	364 / 165	40 / 2.3	1.85X14		*
3.50-16	4PR	52P	TT/TL	3.7 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16	*	*
110/90-16	4PR	59P	TT/TL	4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16		*
2.25-17		33L	TT	2.4 / 61	22.0 / 559	254 / 115	33 / 2.3	1.60X17		*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17		*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17		*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17		*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17		*
3.00-17	4PR	45P	TT/TL	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17	*	*
3.00-17	6PR	50P	TT	3.1 / 80	23.7 / 602	419 / 190	40 / 2.8	1.85X17		*
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
2.75-18	6PR	48P	TT	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18		*
3.00-18	4PR	47P	TT/TL	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18		*



K270B

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-16	4PR	59P	TT	4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16	*	*
110/90-16		65P	TT/TL	4.3 / 109	23.8 / 604	639 / 290	40 / 2.8	2.50X16		*
2.50-17	4PR	38P	TT/TL	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17		*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17		*
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
3.00-18	4PR	48P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18		*
3.00-18	8PR	55P	TT	3.1 / 80	24.7 / 627	481 / 218	44 / 3.1	1.85X18		*
3.25-18	4PR	52P	TT	3.5 / 89	25.2 / 639	441 / 200	33 / 2.3	2.15X18	*	*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*



K272

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-16	4PR	43P	TT	3.1 / 80	22.7 / 576	342 / 155	33 / 2.3	1.85X16	*	*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17	*	*
3.25-17	4PR	50P	TT	3.5 / 89	24.2 / 614	419 / 190	33 / 2.3	2.15X17		*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
2.75-18	6PR	48P	TT	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18		*
2.75-18	8PR	51P	TT	3.0 / 75	24.1 / 613	430 / 195	44 / 3.1	1.85X18		*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18		*
3.75-19	4PR	61P	TT	4.0 / 99	27.0 / 687	567 / 257	33 / 2.3	2.15X19	*	*



K273

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.25-16	6PR	55P	TT	3.5 / 89	23.1 / 588	481 / 218	40 / 2.8	2.15X16		*
3.50-16	4PR	52P	TT/TL	3.7 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16	*	*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17	*	*
3.50-17	4PR	54P	TT	3.7 / 93	24.6 / 624	551 / 250	33 / 2.3	2.15X17	*	*
2.50-18	4PR	40P	TT	2.6 / 65	23.3 / 593	309 / 140	33 / 2.3	1.60X18		*
3.00-18	4PR	48P	TT	3.1 / 80	24.7 / 627	397 / 180	33 / 2.3	1.85X18	*	*



K273A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17		*



K273B

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17		*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17		*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18		*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18		*



K285

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.00-18	4PR	48P	TT/TL	3.1 / 80	24.7 / 627	397 / 180	33 / 2.3	1.85X18	*	*



K291

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-18	4PR	42P	TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
80/100-18	4PR	47P	TT/TL	3.1 / 80	24.3 / 617	386 / 175	33 / 2.3	1.85X18	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-18	4PR	51P	TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
90/90-18	6PR	57P	TL	3.5 / 90	24.4 / 619	507 / 230	40 / 2.8	2.15X18		*



K320

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
90/90-18	4PR	51P	TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
110/90-18	4PR	61H	TL	4.3 / 109	25.8 / 655	567 / 257	40 / 2.8	2.50X18	*	*



K324

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/90-18	4PR	47P	TL	3.1 / 80	23.7 / 601	386 / 175	33 / 2.3	1.85X18	*	*



K328

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/80-16	4PR	50P	TT/TL	4.0 / 101	22.3 / 566	419 / 190	33 / 2.3	2.50X16	*	*
110/90-16	4PR	59P	TT	4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16	*	*
120/90-16	4PR	63P	TL	4.7 / 119	24.5 / 622	600 / 272	33 / 2.8	2.75X16	*	*
90/90-17	4PR	49P	TL	3.5 / 90	23.4 / 594	419 / 190	33 / 2.3	2.15X17	*	*
100/80-17	4PR	52P	TL	4.0 / 101	23.3 / 592	441 / 200	33 / 2.3	2.50X17	*	*
110/80-17	4PR	57P	TT/TL	4.3 / 109	23.9 / 608	507 / 230	33 / 2.3	2.50X17	*	*
110/80-17		57H	TL	4.3 / 109	23.9 / 608	507 / 230	40 / 2.8	2.50X17	*	*
120/80-17	4PR	61S	TL	4.7 / 119	24.6 / 624	567 / 257	36 / 2.5	2.75X17	*	*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*



K329

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-17	4PR	49P	TT/TL	3.5 / 90	23.4 / 594	408 / 185	33 / 2.3	2.15X17	*	*



K340

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-14	4PR	32P	TT	2.55 / 65	19.37 / 492	247 / 112	33 / 2.3	1.60X14		*
2.75-14	6PR	41P	TT	3.0 / 75	20.2 / 512	320 / 145	40 / 2.8	1.85X14		*
3.25-16	4PR	48P	TT	3.5 / 89	23.1 / 588	397 / 180	33 / 2.3	2.15X16		*
3.50-16	4PR	52P	TT	3.7 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16		*
3.50-16	6PR	58P	TT	3.7 / 93	23.5 / 598	520 / 236	40 / 2.8	2.15X16		*
110/90-16	4PR	59P	TT/TL	4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16	*	*
110/90-16	6PR	65P	TT	4.3 / 109	23.8 / 604	639 / 290	40 / 2.8	2.50X16		*
2.75-17	4PR		TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17		*
2.75-18	4PR	42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18		*
2.75-18	6PR	48P	TT	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18		*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18		*
3.25-18		59P	TL	3.5 / 90	25.1 / 639	536 / 243	40 / 2.8	2.15X18		*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
90/90-18	6PR	57P	TL	3.5 / 90	24.4 / 619	507 / 230	40 / 2.8	2.15X18		*



K418

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-16	6PR	65P	TT	4.3 / 109	23.8 / 604	639 / 290	40 / 2.8	2.50X16		*
2.50-17	4PR	38P	TT/TL	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17		*
2.75-17	4PR	41P	TT/TL	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17		*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17		*
2.75-18	4PR	42P	TT/TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18		*
2.75-18	8PR	51P	TT	3.0 / 75	24.1 / 613	430 / 195	44 / 3.1	1.85X18		*
3.00-18	4PR	47P	TT/TL	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18		*



K422

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33L	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.75-17		52P	TT	3.0 / 75	23.1 / 588	441 / 200	40 / 2.8	1.85X17	*	*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17	*	*
2.75-17	8PR	50P	TL	3.0 / 75	23.1 / 588	419 / 190	44 / 3.1	1.85X17		*
3.00-17	4PR	45P	TT	3.1 / 80	23.7 / 602	364 / 165	33 / 2.3	1.85X17		*
3.00-17	6PR	50P	TT	3.1 / 80	23.7 / 602	419 / 190	40 / 2.8	1.85X17	*	*
100/90-17		55P	TT/TL	4.0 / 101	24.1 / 612	481 / 218	33 / 2.3	2.50X17	*	*



K422B

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33L	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.25-17	4PR	33P	TL	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.50-17	4PR	38P	TT/TL	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT/TL	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17	*	*
2.50-17	8PR	45P	TT	2.6 / 65	22.4 / 568	364 / 165	44 / 3.1	1.60X17	*	*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17	*	*
2.75-17	8PR	50P	TT	3.0 / 75	23.1 / 588	419 / 190	44 / 3.1	1.85X17	*	*



K425

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/80-14		53L	TL	3.1 / 80	19.1 / 484	342 / 155	40 / 2.8	1.85X14	*	*
110/80-14	6PR	59J	TL	4.3 / 109	20.9 / 532	536 / 243	40 / 2.8	2.50X14	*	*
70/90-16	6PR	42J	TL	2.7 / 69	20.9 / 532	331 / 150	40 / 2.8	1.60X16	*	*
80/80-16	6PR	46J	TL	3.1 / 80	21.0 / 534	364 / 165	40 / 2.8	1.85X16	*	*
80/80-16		46P	TL	3.1 / 80	21.0 / 534	364 / 165	40 / 2.8	1.85X16	*	*
80/90-16	4PR	43P	TL	3.1 / 80	21.7 / 550	342 / 155	33 / 2.3	1.85X16	*	*
90/80-16		52P	TL	3.5 / 90	21.7 / 550	441 / 200	40 / 2.8	2.15X16	*	*
100/80-16		56P	TL	4.0 / 101	22.3 / 566	494 / 224	40 / 2.8	2.50X16	*	*



K428

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
120/80-16	4PR	60P	TT/TL	4.7 / 119	23.5 / 598	551 / 250	33 / 2.3	2.75X16	*	*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
100/90-18	4PR	56P	TT/TL	4.0 / 101	25.1 / 637	494 / 224	33 / 2.3	2.50X18	*	*



K429

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-18	4PR	47P	TT/TL	3.1 / 80	24.3 / 617	386 / 175	33 / 2.3	1.85X18	*	*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*
90/90-18	6PR	57P	TL	3.5 / 90	24.4 / 619	507 / 230	40 / 2.8	2.15X18	*	*



K430

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
130/90-16	4PR	67S	TL	5.1 / 129	25.2 / 640	677 / 307	33 / 2.3	3.00X16		*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/80-16	4PR	50P	TT/TL	4.0 / 101	22.3 / 566	419 / 190	33 / 2.3	2.50X16	*	*
110/80-16	4PR	55P	TT	4.3 / 109	22.9 / 582	481 / 218	33 / 2.3	2.50X16		*
120/80-16	4PR	60P	TT	4.7 / 119	23.5 / 598	551 / 250	33 / 2.3	2.75X16	*	*
90/90-17	4PR	49P	TL	3.5 / 90	23.4 / 594	408 / 185	33 / 2.3	2.15X17		*
110/80-17	4PR	57S	TL	4.3 / 109	23.9 / 608	507 / 230	40 / 2.8	2.50X17		*
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18		*



K482

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.25-17	4PR	33P	TT	2.4 / 61	21.9 / 556	254 / 115	33 / 2.3	1.60X17	*	*
2.50-17	4PR	38P	TT/TL	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
60/100-17		33P	TT	2.4 / 62	21.7 / 552	254 / 115	33 / 2.3	1.40X17		*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-17	4PR	38P	TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17	*	*
2.50-17	6PR	43P	TT	2.6 / 65	22.4 / 568	342 / 155	40 / 2.8	1.60X17		*
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-17	6PR	47P	TT	3.0 / 75	23.1 / 588	386 / 175	40 / 2.3	1.85X17	*	*
2.75-17	8PR	50P	TT	3.0 / 75	23.1 / 588	419 / 190	44 / 3.1	1.85X17		*



K485

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-16 4PR	59P	TT/TL		4.3 / 109	23.8 / 604	536 / 243	33 / 2.3	2.50X16	*	*
110/90-16 6PR	65P	TL		4.3 / 109	23.8 / 604	639 / 290	40 / 2.8	2.50X16		*



K488

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-14 4PR	34P	TT/TL		2.7 / 69	19.0 / 482	260 / 118	33 / 2.3	1.60X14	*	*
80/80-14	43P	TL		3.1 / 80	19.1 / 486	454 / 206	40 / 2.8	1.85X14		*
80/90-14 4PR	40P	TT/TL		3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14	*	*
80/90-14 6PR		TT/TL		3.2 / 80	19.7 / 500	375 / 170	40 / 2.8	1.85X14	*	*
90/90-14	46P	TT / TL		3.5 / 89	19.9 / 505	375 / 170	33 / 2.3	2.15X14		*
100/70-14	51P	TL		3.9 / 100	19.5 / 496	430 / 195	40 / 2.8	2.75X14		*
70/90-16 4PR	36P	TT/TL		2.7 / 69	20.9 / 532	276 / 125	33 / 2.3	1.60X16	*	*
80/80-16 6PR	46J	TL		3.1 / 80	21.0 / 534	364 / 165	40 / 2.8	1.85X16		*
80/90-16 4PR	43P	TT/TL		3.1 / 80	25.4 / 550	342 / 155	33 / 2.3	1.85X16	*	*
90/80-16 4PR	45P	TT/TL		3.4 / 87	21.7 / 550	364 / 165	33 / 2.3	2.15X16	*	*
70/90-17 4PR	38P	TT		2.7 / 68	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17 6PR	50P	TT/TL		3.1 / 80	22.7 / 576	419 / 190	40 / 2.8	1.85X17	*	*
90/90-17 4PR	49P	TL		3.5 / 90	23.4 / 594	408 / 185	33 / 2.3	2.15X17		*
70/90-18 4PR	40P	TL		2.7 / 69	23.0 / 583	309 / 140	33 / 2.3	1.60X18	*	*



K488B

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/80-17 4PR	35P	TL		2.7 / 69	21.4 / 544	267 / 121	33 / 2.3	1.60X17		*
80/80-17 4PR	41P	TL		3.1 / 80	22.0 / 560	320 / 145	33 / 2.3	1.85X17		*
80/80-17 6PR	47P	TT		2.9 / 74	22.2 / 563	386 / 175	40 / 2.8	1.40X17		*
90/80-17 4PR	46S	TL		3.5 / 90	22.7 / 576	375 / 170	33 / 2.3	2.15X17		*
90/80-17 6PR		TT		3.4 / 86	22.7 / 576	454 / 206	40 / 2.8	2.15X17		*



K488D

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-17 4PR	38P	TT/TL		2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	*
70/90-17 4PR	38S	TL		2.7 / 69	21.9 / 558	291 / 132	36 / 2.5	1.60X17	*	*



K489

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.50-16	4PR	52P	TT/TL	3.7 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16	*	*
3.50-16	6PR	58P	TT	3.7 / 93	23.5 / 598	520 / 236	40 / 2.8	2.15X16	*	*
2.75-18	8PR	51P	TT	3.0 / 75	24.1 / 613	430 / 195	44 / 3.1	1.85X18	*	*
3.00-18	4PR	47P	TT/TL	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18	*	*
3.00-18	8PR	55P	TT/TL	3.1 / 80	24.7 / 627	481 / 218	44 / 3.1	1.85X18	*	*
3.25-18	4PR	52P	TT	3.5 / 89	25.2 / 639	441 / 200	33 / 2.3	2.15X18	*	*
90/90-18	4PR	51P	TT	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*



K492

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-17	38S		TT/TL	2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17	44S		TT/TL	3.1 / 80	22.7 / 576	353 / 160	33 / 2.3	1.85X17	*	*
90/80-17	46S		TT/TL	3.5 / 90	22.7 / 576	375 / 170	33 / 2.3	2.15X17	*	*
100/80-17	52P		TL	4.0 / 101	23.3 / 592	441 / 200	33 / 2.3	2.50X17	*	*
80/90-18	45P		TL	3.1 / 80	23.9 / 606	364 / 165	33 / 2.3	1.85X18	*	*
90/90-18	51H		TL	3.5 / 90	24.4 / 619	430 / 195	40 / 2.8	2.15X18	*	*



K6010

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/90-14	40P		TL	3.1 / 80	19.6 / 500	309 / 140	33 / 2.3	1.85X14	*	*



K6010

REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-14	34P		TL	2.7 / 69	18.9 / 482	260 / 118	33 / 2.3	1.60X14	*	*
70/90-14	34S		TL	2.7 / 69	18.9 / 482	260 / 118	33 / 2.3	1.60X14	*	*
80/80-14	REINF	43P	TL	3.1 / 80	19.0 / 484	342 / 155	40 / 2.8	1.85X14	*	*
80/90-14		40P/S	TL	3.1 / 80	19.6 / 500	309 / 140	33 / 2.3	1.85X14	*	*
90/80-14		43P/S	TL	3.4 / 88	19.6 / 500	342 / 155	38 / 2.6	2.15X14	*	*
90/90-14		46P	TL	3.5 / 90	20.3 / 518	375 / 170	33 / 2.3	2.15X14	*	*
100/70-14	4PR	45P	TL	3.9 / 100	19.5 / 496	364 / 165	33 / 2.3	2.75X14	*	*
110/70-14	REINF	56P	TL	4.3 / 110	20.1 / 510	494 / 224	40 / 2.8	3.00X14	*	*
100/80-14		48P	TL	3.9 / 101	20.3 / 516	397 / 180	33 / 2.3	2.50X14	*	*
100/90-14		51P	TL	3.9 / 101	21.1 / 536	430 / 195	33 / 2.3	2.50X14	*	*
100/90-14	REINF	57P	TL	4.0 / 102	21.2 / 539	507 / 230	40 / 2.8	2.50X14	*	*
100/90-14		51S	TL	3.9 / 101	21.1 / 536	430 / 195	33 / 2.3	2.50X14	*	*
70/90-16		36P	TL	2.7 / 69	20.8 / 530	276 / 125	33 / 2.3	1.60X16	*	*
70/90-16		36S	TL	27.2 / 69	20.9 / 530	276 / 125	36 / 2.5	1.60X16	*	*
80/90-16		43P	TL	3.1 / 80	21.6 / 550	342 / 155	33 / 2.3	1.85X16	*	*
80/90-16		43S	TL	3.1 / 80	21.7 / 550	342 / 155	36 / 2.5	1.85X16	*	*
80/90-16		48P	TL	3.1 / 80	21.7 / 550	397 / 180	40 / 2.8	1.85X16	*	*
90/80-16	4PR	45P	TL	3.5 / 90	21.7 / 550	364 / 165	33 / 2.3	2.15X16	*	*
60/80-17		27S	TL	2.4 / 60	20.8 / 528	215 / 97.5	38 / 2.6	1.40X17	*	*
60/90-17		30S	TL	2.4 / 60	21.3 / 542	234 / 106	38 / 2.6	1.40X17	*	*
70/90-17	4PR	38P/S	TL	2.7 / 69	21.9 / 558	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17	4PR	44P	TL	3.1 / 80	22.6 / 576	353 / 160	33 / 2.3	1.85X17	*	*
80/90-17		44S	TL	3.1 / 80	22.7 / 576	353 / 160	36 / 2.5	1.85X17	*	*
80/90-17		50P	TL	3.1 / 80	22.7 / 576	419 / 190	40 / 2.8	1.85X17	*	*
90/80-17		46P/S	TL	3.5 / 89	22.5 / 574	375 / 170	33 / 2.3	2.15X17	*	*
100/70-17		49P	TL	3.9 / 100	22.5 / 572	408 / 185	33 / 2.3	2.75X17	*	*
100/70-17		49H	TL	3.9 / 100	22.5 / 572	408 / 185	42 / 2.9	2.75X17	*	*
120/70-17		58P/H	TL	4.8 / 122	23.6 / 600	520 / 236	33 / 2.3	3.50X17	*	*
120/70-17		64P	TL	4.8 / 122	23.6 / 600	617 / 280	40 / 2.8	3.50X17	*	*



K6011

- Compound enhancement for better grip on dry and wet pavement.
- Reinforced tire structure to provide better breaking.
- Latest pattern design 3D analyzed to prevent uneven wearing of the tire.
- Central groove inspired by lightning , suitable for both front and rear use.
- Wave design on the tire shoulder prevents from slippery road condition.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-14	34P/S	TL	2.7 / 69	18.9 / 482	260 / 118	2.6 / 38	1.60X14	*	*
80/90-14	40P/S	TL	3.1 / 80	19.6 / 500	309 / 140	2.6 / 38	1.85X14	*	*
90/80-14	43P/S	TL	3.4 / 88	19.6 / 500	342 / 155	2.6 / 38	2.15X14	*	*
90/90-14	46P/S	TL	3.5 / 90	20.3 / 518	375 / 170	2.6 / 38	2.15X14	*	*
100/90-14	51P/S	TL	4.0 / 102	21.1 / 536	430 / 195	2.6 / 38	2.50X14	*	*
70/90-17	38P	TL	2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	*
70/90-17	38S	TL	2.7 / 69	22.0 / 558	291 / 132	36 / 2.5	1.60X17	*	*
80/90-17	44P	TL	3.1 / 80	22.7 / 576	353 / 160	33 / 2.3	1.85X17	*	*
80/90-17	44S	TL	3.1 / 80	22.7 / 576	353 / 160	36 / 2.5	1.85X17	*	*
90/80-17	46P	TL	3.5 / 90	22.7 / 576	375 / 170	33 / 2.3	2.15X17	*	*
90/80-17	46S	TL	3.5 / 90	22.7 / 576	375 / 170	36 / 2.5	2.15X17	*	*
100/70-17	49P	TL	3.9 / 100	22.5 / 572	408 / 185	33 / 2.3	2.75X17	*	*
100/70-17	49H	TL	3.9 / 100	22.5 / 572	408 / 185	40 / 2.8	2.75X17	*	*
110/70-17	54P	TL	4.3 / 110	23.2 / 590	212 / 467	33 / 2.3	3.00X17	*	*
110/70-17	54H	TL	4.3 / 110	23.2 / 590	212 / 467	40 / 2.8	3.00X17	*	*
120/70-17	58P	TL	4.8 / 122	23.6 / 600	236 / 520	33 / 2.3	3.50X17	*	*
120/70-17	58H	TL	4.8 / 122	23.6 / 600	236 / 520	40 / 2.8	3.50X17	*	*



K6039A

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/70-17	54S	TL	4.3 / 110	23.1 / 586	467 / 212	33 / 2.3	3.00X17	*	*
130/70-17	62S	TL	5.0 / 129	24.2 / 614	584 / 265	33 / 2.3	3.50X17	*	*
80/80-17	41S	TL	3.1 / 80	22.0 / 560	320 / 145	33 / 2.3	1.85X17	*	*
90/80-17	46S	TL	3.5 / 90	22.7 / 576	375 / 170	33 / 2.3	2.15X17	*	*



K6301

- Great grip in wet weather.
- Front and/or Rear tire application.
- Outstanding pattern design provides better drainage.
- Outstanding structure for maximum loading capacity.
- All-weather pattern inspires confidence on asphalt, cement, gravel, and dirt.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TT	2.9 / 75	320 / 145	33 / 2.3	1.85X17	*	*
70/90-17	4PR	38P	TT/TL	2.7 / 69	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17	4PR	44P	TT/TL	3.1 / 80	353 / 160	33 / 2.3	1.85X17	*	*



K6302

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	41P	TL	2.9 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	
90/90-17	4PR	49P	TL	3.5 / 90	408 / 185	33 / 2.3	2.15X17	*	
2.75-18	42P	TT/TL	3.0 / 77	24.2 / 615	331 / 150	33 / 2.3	1.60X18	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-18	51P	TL	3.5 / 90	24.2 / 615	430 / 195	33 / 2.3	2.15X18	*	



K6303

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-17	4PR	38P	TL	2.5 / 65	291 / 132	33 / 2.3	1.60X17	*	*



K6304

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TL	3.0 / 75	320 / 145	33 / 2.3	1.85X17	*	*



K6310

- Sporty pattern design combines narrow and wide grooves to provide flexible tread surface for superior road handling and wet road traction.
- Asymmetric tread pattern provides better straight-line stability.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-17	38P	TT	2.7 / 69	21.9 / 558	291 / 132	33 / 2.3	1.60X17	*	*
70/90-17	38S	TL	2.7 / 69	21.9 / 558	291 / 132	33 / 2.3	1.60X17	*	*
80/90-17	44P	TT	3.1 / 80	22.6 / 576	353 / 160	33 / 2.3	1.85X17	*	*
80/90-17	44S	TL	3.1 / 80	22.6 / 576	353 / 160	33 / 2.3	1.85X17	*	*
90/80-17	46S	TL	3.5 / 90	22.6 / 575	375 / 170	36 / 2.5	2.15X17	*	*



K6313

- High performance compound.
- Rounded and extended shoulder design provides stability and handling.
- Cross-cut grooves and sipes provide more biting edges and excellent wet weather grip.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-16	4PR	59P	TL	4.3 / 109	23.9 / 607	536 / 243	33 / 2.3	2.50X16	*
110/90-16	REINF	65P	TL	4.2 / 109	23.7 / 604	639 / 290	40 / 2.8	2.50X16	*
120/90-16	4PR	63P	TL	4.6 / 119	24.4 / 622	600 / 272	33 / 2.3	2.75X16	*
2.50-17	4PR	38P	TT	2.5 / 65	22.3 / 568	291 / 132	33 / 2.3	1.60X17	*
2.75-17	4PR	41P	TL	2.9 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*
2.75-17		52P	TT	3.0 / 75	23.3 / 591	441 / 200	40 / 2.8	1.85X17	*
3.00-17	4PR		TT	3.1 / 80	23.7 / 604	364 / 165	33 / 2.3	1.85X17	*
70/90-17	4PR	38P	TL	2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*
80/90-17	4PR	44P	TL	3.1 / 80	22.7 / 576	353 / 160	33 / 2.3	1.85X17	*
90/90-17	4PR	49P	TL	3.5 / 90	23.4 / 594	408 / 185	33 / 2.3	2.15X17	*
90/90-17	REINF	56P	TL	3.5 / 90	23.3 / 594	494 / 224	40 / 2.8	2.15X17	*
100/90-17		55P	TL	3.9 / 101	24.0 / 612	481 / 218	33 / 2.3	2.50X17	*
120/80-17	4PR	61P	TL	4.7 / 119	24.7 / 627	567 / 257	33 / 2.3	2.75X17	*
120/80-17	REINF	67P	TL	4.6 / 119	24.5 / 624	677 / 307	40 / 2.8	2.75X17	*
150/60-17	4PR	66P	TL	5.9 / 151	24.0 / 612	661 / 300	33 / 2.3	4.25X17	*
2.75-18	4PR		TT	2.9 / 75	24.3 / 618	331 / 150	33 / 2.3	1.85X18	*
3.00-18	4PR		TT	3.1 / 80	24.8 / 631	386 / 175	33 / 2.3	1.85X18	*
90/90-18	6PR	57P	TL	3.5 / 90	24.3 / 619	507 / 230	40 / 2.8	2.15X18	*
100/90-18		56P	TL	4.0 / 101	25.1 / 637	494 / 224	33 / 2.3	2.50X18	*
100/90-18	REINF	62P	TL	3.9 / 101	25.0 / 637	584 / 265	40 / 2.8	2.50X18	*
4.10-18	4PR		TT	4.0 / 102	25.2 / 641	536 / 243	33 / 2.3	2.15X18	*



K6318

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/90-14	4PR	40P	TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14	*
90/90-14	4PR	46P	TL	3.5 / 90	20.4 / 518	375 / 170	33 / 2.3	2.15X14	*
80/90-17		44P	TL	3.1 / 80	22.7 / 576	353 / 160	33 / 2.3	1.85X17	*
90/90-17		49P	TL	3.5 / 90	23.5 / 596	408 / 185	33 / 2.3	2.15X17	*
2.75-18		42P	TT	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*
3.00-18		47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*



K6321

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
4.00-17	4PR	63P	TT	4.1 / 104	25.4 / 646	600 / 272	33 / 2.3	2.15X17	*
4.50-17	4PR	67P	TT	4.4 / 111	26.1 / 664	677 / 307	33 / 2.3	2.15X17	*



K6324

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
80/100-18	47P	TL	3.1 / 80	24.2 / 617	386 / 175	33 / 2.3	1.85X18	*	*



K6335F

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
60/100-17	33P	TT	2.4 / 60	21.7 / 552	254 / 115	33 / 2.3	1.40X17		*



K6335

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
70/100-17	40P	TT	2.7/69	22.5/572	309/140	33 / 2.3	1.60X17		*



K6340

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT	
3.00-19	6PR	54P	TT	3.1 / 80	25.7 / 653	467 / 212	40 / 2.8	1.85X19	*	*



K6341

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
100/90-14	6PR	57P	TT	4.0 / 102	21.0 / 534	507 / 230	40 / 2.8	2.50X14	*	*



K665

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
70/90-14	4PR	34P	TT/TL	2.7 / 69	19.0 / 482	260 / 118	33 / 2.3	1.60X14	*	
70/90-17	4PR	38P	TT/TL	2.7 / 69	22.0 / 558	291 / 132	33 / 2.3	1.60X17	*	



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/90-14	4PR	40P	TT/TL	3.1 / 80	19.7 / 500	309 / 140	33 / 2.3	1.85X14	*	
100/70-17		49P	TL	3.9 / 100	22.5 / 572	408 / 185	33 / 2.3	2.75X17	*	
80/90-17	4PR	44P	TT/TL	3.1 / 80	22.7 / 576	353 / 160	33 / 2.3	1.85X17	*	
80/90-17	6PR	50P	TT/TL	3.1 / 80	22.8 / 578	419 / 190	40 / 2.8	1.85X17	*	
100/90-18	6PR	62P	TL	4.0 / 101	25.1 / 637	584 / 265	40 / 2.8	2.50X18	*	



K666

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.50-17	6PR	43P	TT	2.5 / 65	22.2 / 566	342 / 155	40 / 2.8	1.60X17	*	
2.75-17	4PR	41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*	



K668

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.25-16	4PR	48P	TT	3.5 / 89	23.1 / 588	397 / 180	33 / 2.3	2.15X16	*
3.25-16	6PR	55P	TT	3.5 / 89	23.1 / 588	481 / 218	40 / 2.8	2.15X16	*
3.50-16	4PR	52P	TT	3.7 / 93	23.5 / 598	441 / 200	33 / 2.3	2.15X16	*
3.50-16	6PR	58P	TT	3.7 / 93	23.5 / 598	520 / 236	40 / 2.8	2.15X16	*
2.50-17	8PR	45P	TT	2.6 / 65	22.4 / 568	364 / 165	43 / 3.0	1.60X17	* *
2.75-17	8PR	50P	TT	3.0 / 75	23.1 / 588	419 / 190	43 / 3.0	1.85X17	* *
2.75-18	6PR	48P	TT	3.0 / 75	24.1 / 613	397 / 180	40 / 2.8	1.85X18	*
2.75-18	8PR	51P	TT	3.0 / 75	24.1 / 613	430 / 195	44 / 3.1	1.85X17	*
3.00-18	8PR	55P	TT	3.1 / 80	24.7 / 627	481 / 218	44 / 3.1	1.85X18	*



K669

- Aggressive tread pattern for street and off-road applications.
- Designed for all weather conditions.

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
110/90-17		66P	TT	4.2 / 109	24.8 / 630	661 / 300	40 / 2.8	2.50X17	*
3.00-18	4PR	47P	TT	3.1 / 80	24.7 / 627	386 / 175	33 / 2.3	1.85X18	*
3.00-18	8PR	55P	TT	3.1 / 80	24.7 / 627	481 / 218	44 / 3.1	1.85X18	*
90/90-19		52P	TT	3.5 / 90	25.3 / 645	441 / 200	33 / 2.3	2.15X19	*



K677 THORAX

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/80-14		43P	TL	3.1 / 80	19.0 / 484	342 / 155	33 / 2.3	1.85X14	*
2.50-17		38P	TT	2.5 / 65	22.4 / 568	291 / 132	33 / 2.3	2.15X17	*
60/100-17		33L	TT	2.3 / 60	21.7 / 552	254 / 115	33 / 2.3	1.40X17	* *
80/100-18	4PR	47P	TT	3.1 / 80	24.2 / 617	386 / 175	33 / 2.3	1.85X18	* *
100/90-19	4PR	57H	TT	4.0 / 101	26.1 / 663	507 / 230	40 / 2.8	2.50X19	* *



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
80/100-14		49L	TT	3.1 / 80	20.3 / 516	408 / 185	40 / 2.8	1.85X14	* *
90/80-14		43P	TL	3.4 / 88	19.6 / 500	342 / 155	33 / 2.3	2.15X15	*
110/80-14		53L	TT/TL	4.2 / 109	20.9 / 532	454 / 206	33 / 2.3	2.50X14	*
2.75-17		41P	TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*
2.50-18	4PR	40P	TT	2.5 / 65	23.3 / 593	309 / 140	33 / 2.3	1.60X18	* *
90/90-18	4PR	51P	TT/TL	3.5 / 90	24.3 / 619	430 / 195	33 / 2.3	2.15X18	* *
100/80-18		53P	TT/TL	3.9 / 101	24.2 / 617	454 / 206	33 / 2.3	2.50X18	*
100/90-18		56P	TT/TL	3.9 / 101	25.0 / 637	494 / 224	33 / 2.3	2.50X18	*
130/80-18	4PR	66H	TT	5.1 / 129	26.1 / 665	661 / 300	40 / 2.8	3.00X18	* *



K680A

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
120/90-15	62P	TL	4.68 / 119	23.46 / 596	584 / 265	33 / 2.3	2.75X15		*



K682

- Excellent wet grip and superior cornering stability.

FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
70/90-17	38P/S	TL	2.7 / 69	22.0 / 558	291 / 132	36 / 2.5	1.60X17	*	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
80/90-17	4PR	44P	TT/TL	3.1 / 80	22.7 / 578	33 / 2.3	1.85X17		*
80/90-17		44S	TL	3.1 / 80	22.7 / 576	36 / 2.5	1.85X17	*	*
80/90-17	6PR	50P	TT/TL	3.1 / 80	22.7 / 578	40 / 2.8	1.85X17		*
90/80-17		46S	TL	3.5 / 90	22.7 / 576	36 / 2.5	2.15X17	*	*



K764

FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
2.75-17	4PR	41P	TL	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17	*	*
2.75-18	4PR	42P	TL	3.0 / 75	24.1 / 613	331 / 150	33 / 2.3	1.85X18	*	*



REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
3.25-17	4PR	50P	TL	3.5 / 89	24.2 / 614	419 / 190	33 / 2.3	2.15X17	*	*
3.50-17	4PR	54P	TL	3.7 / 93	24.6 / 624	551 / 250	33 / 2.3	2.15X17	*	*



K7025

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK	DOT
90/90-18	4PR	51P	TL	3.5 / 90	24.4 / 619	430 / 195	33 / 2.3	2.15X18	*	*



K3601


•Low rolling resistance.

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
4.00-8	6PR	76E	TT	4.4 / 114	16.6 / 423	882 / 400	62 / 4.3	3.00X8		



K635A

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF /CM ²	RIM (INCH)	E MARK	DOT
4.00-12	6PR	70J	TT	4.1 / 105	20.4 / 517	739 / 335	40 / 2.8	2.50X12		*

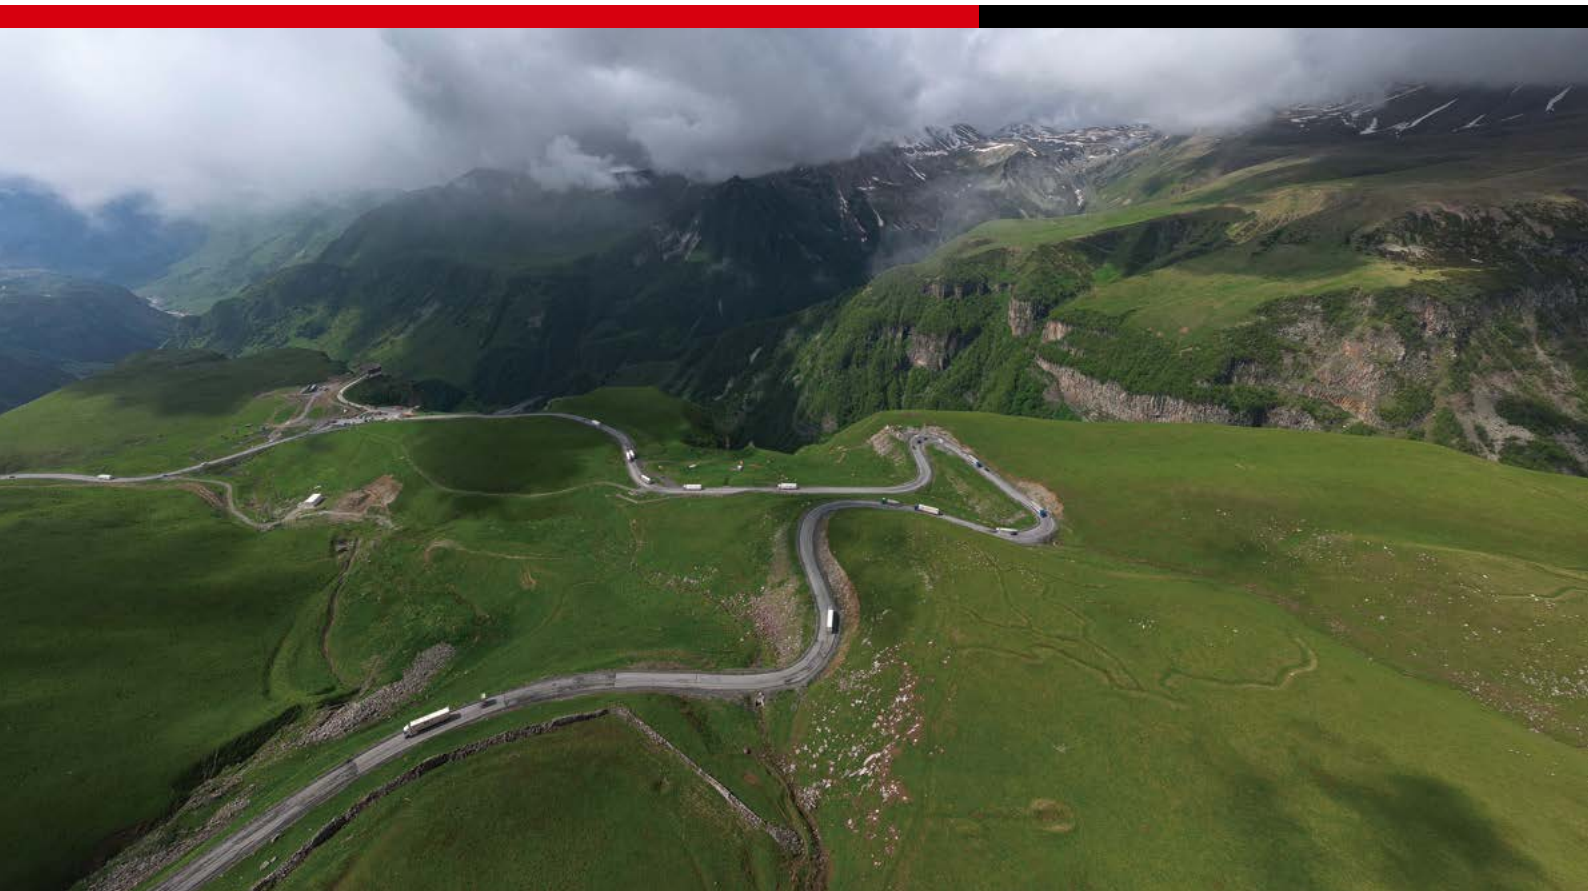



K262 FOR SIDECAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
2.75-14	4PR	35P	TT	3.0 / 75	20.2 / 512	267 / 121	33 / 2.3	1.85X14		*
2.75-14	6PR	41P	TT	3.0 / 75	20.2 / 512	320 / 145	40 / 2.8	1.85X14		*



K272

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
2.75-14	4PR	35P	TT	3.0 / 75	20.2 / 512	267 / 121	33 / 2.3	1.85X14	*	*




K363

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK	DOT
3.00-12	6PR	52J	TT	3.1 / 80	18.3 / 464	441 / 200	40 / 2.8	2.15X12		*
3.50-12	6PR	62J	TT	3.6 / 92	19.2 / 488	584 / 265	40 / 2.8	2.50X12		*
3.75-12	6PR	66J	TT	3.9 / 99	19.9 / 506	661 / 300	40 / 2.8	2.50X12		*
4.00-12	4PR		TT/TL	4.1 / 105	20.4 / 517	617 / 280	36 / 2.5	2.50X12		*
4.00-12	6PR		TT/TL	4.1 / 105	20.4 / 517	739 / 335	40 / 2.8	2.50X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	4PR		TT	5.0 / 127	21.3 / 542	567 / 257	33 / 2.3	3.00X12		*
4.50-12	6PR		TT	5.0 / 127	21.3 / 542	783 / 355	44 / 3.1	3.00X12		*
4.50-12	8PR		TT	5.0 / 127	21.3 / 542	915 / 415	58 / 4.1	3.00X12		*
3.00-16	6PR	48P	TT	3.1 / 80	22.7 / 576	397 / 180	40 / 2.8	1.85X16		*
3.25-16	6PR	55P	TT	3.5 / 89	23.1 / 588	481 / 218	40 / 2.8	2.15X16		*
2.50-17	4PR		TT	2.6 / 65	22.4 / 568	291 / 132	33 / 2.3	1.60X17		*
2.75-17	4PR		TT	3.0 / 75	23.1 / 588	320 / 145	33 / 2.3	1.85X17		*
3.00-17	6PR		TT	3.1 / 80	23.7 / 602	419 / 190	40 / 2.8	1.85X17		*
3.25-17	6PR	57P	TT	3.5 / 89	24.2 / 614	507 / 230	40 / 2.8	2.15X17		*
3.00-18	6PR	52P	TT	3.1 / 80	24.7 / 627	441 / 200	40 / 2.8	1.85X18		*


ATV / UTV TIRE TERRAIN GUIDE

ATV / UTV TIRE TERRAIN GUIDE

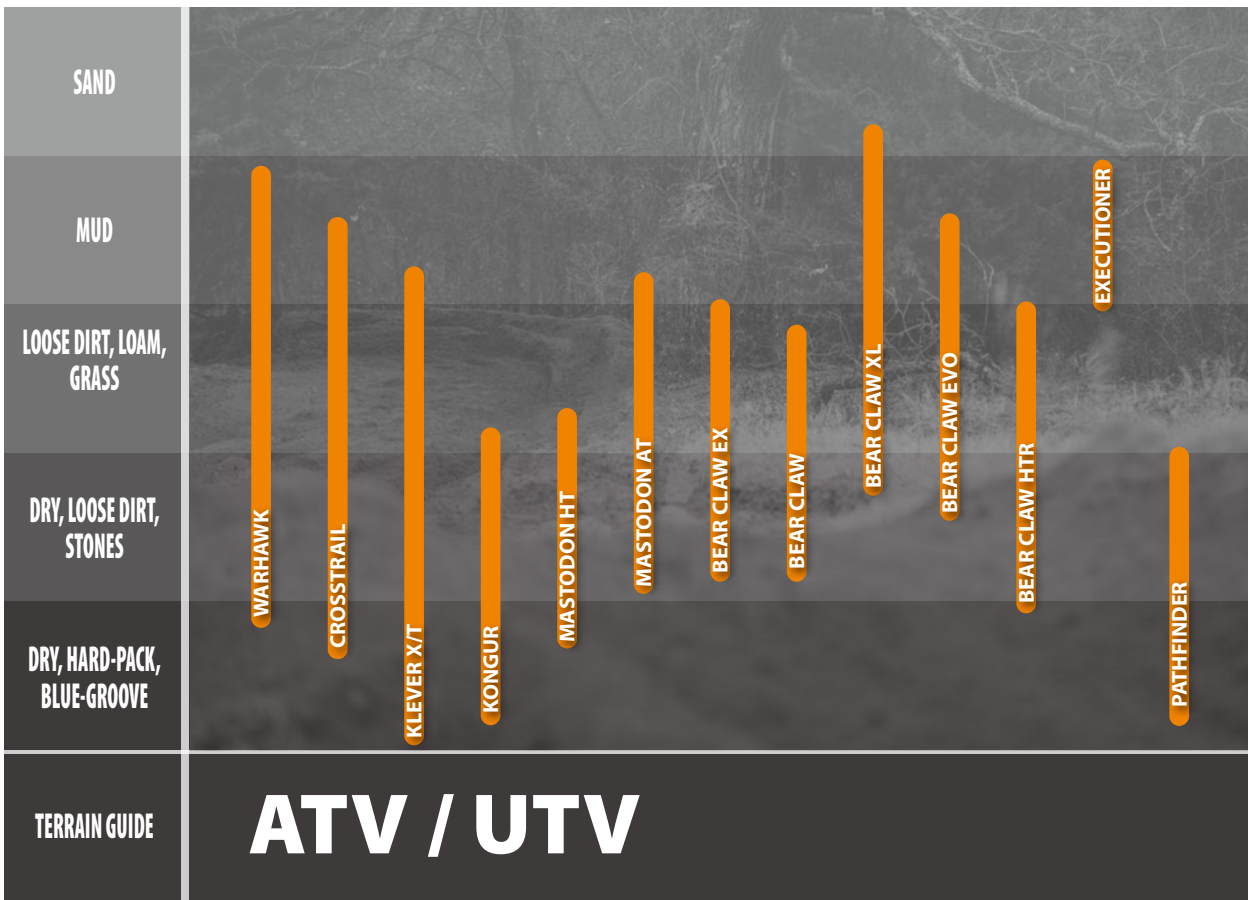

SPORT ATV TIRE TERRAIN GUIDE

SPORT ATV TIRE TERRAIN GUIDE

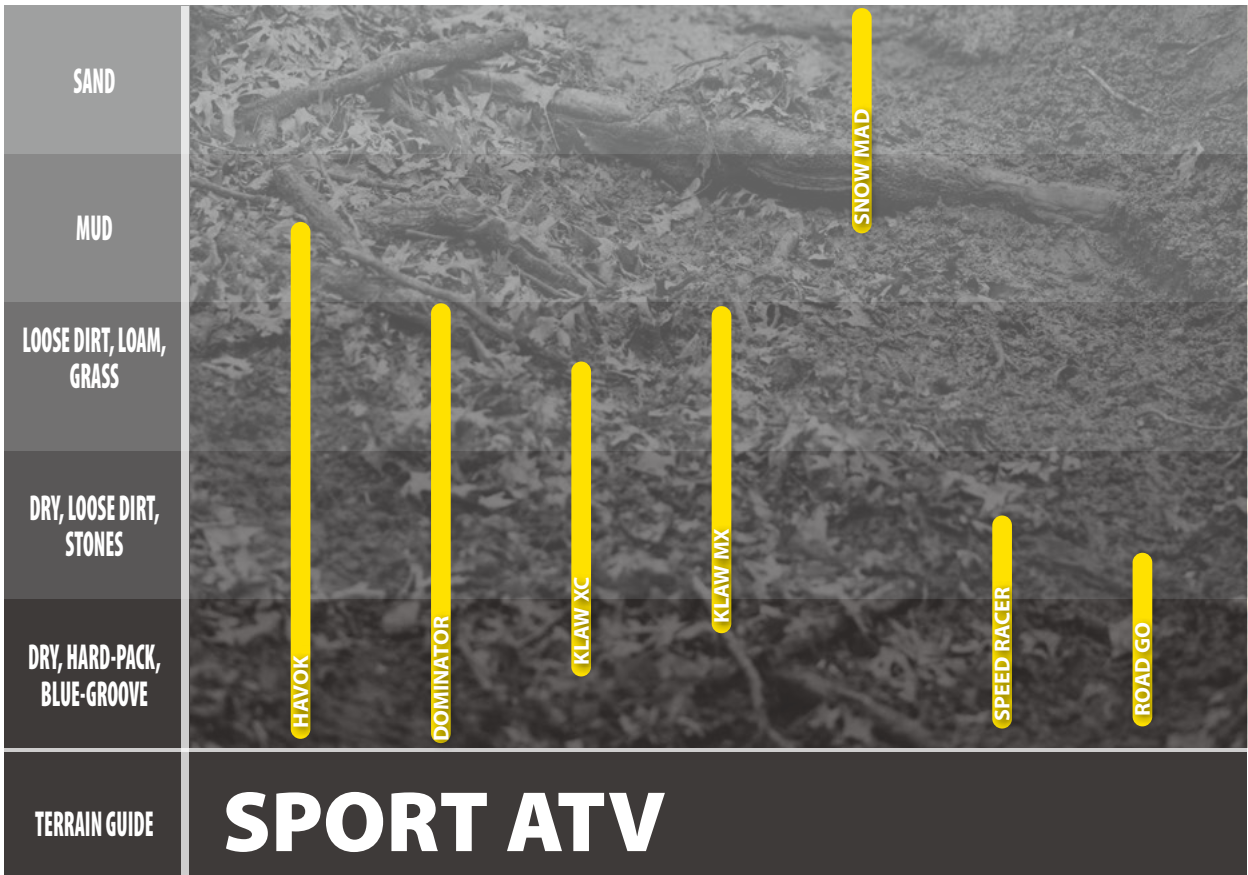



K299 BEAR CLAW

- 6ply-rated extra tough casing to resist punctures.
- Angled knobs dig into the terrain for maximum traction.
- Center lugs provide extra traction and better control.
- Built-in rim guard protects your wheel from dings / dents.
- Long-range tread compound.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT22X12-8	4PR	46F	TL	11.2 / 285	21.3 / 540	375 / 170	5.0 / 0.35	8X9.5AT	*
22X12.00-8	6PR		TL	11.3 / 288	21.3 / 540	430 / 195	7.0 / 0.50	8X9.5AT	
22X12.00-9	4PR	46F	TL	11.0 / 280	22.3 / 566	375 / 170	5.0 / 0.35	9X9.5AT	*
22X12.00-9	6PR		TL	10.7 / 273	22.1 / 562	430 / 195	7.0 / 0.50	9X9.5AT	
25X12.00-9	6PR		TL	11.4 / 290	24.6 / 625	495 / 224	7.0 / 0.50	9X9.5AT	
25X12.50-9	4PR	51F	TL	11.2 / 285	24.5 / 622	430 / 195	5.0 / 0.35	9X9.5AT	*
25X12.50-9	6PR		TL	11.4 / 290	24.6 / 625	495 / 224	7.0 / 0.50	9X9.5AT	
22X8.00-10	4PR	31F	TL	8.5 / 215	22.0 / 560	240 / 109	5.0 / 0.35	10X6.0AT	*
22X8.00-10	6PR		TL	8.5 / 215	21.5 / 546	275 / 125	7.0 / 0.50	10X6.0AT	
22X12.00-10	4PR	46F	TL	11.4 / 289	21.3 / 542	375 / 170	5.0 / 0.35	10X10.0AT	*
22X12.00-10	6PR		TL	11.1 / 283	21.1 / 535	430 / 195	7.0 / 0.50	10X9.5AT	
23X7.00-10	4PR	31F	TL	6.9 / 176	22.3 / 565	240 / 109	5.0 / 0.35	10X5.5AT	*
23X7.00-10	6PR	45F	TL	7.0 / 179	22.3 / 567	275 / 125	7.0 / 0.50	10X5.5AT	*
AT23X10-10	6PR	46F	TL	10.2 / 258	23.0 / 584	374 / 170	7.0 / 0.50	10X8.0AT	*
23X10.00-10	6PR	62F	TL	10.7 / 273	24.0 / 610	580 / 265	14.0 / 1.0	10X8.0AT	*
24X11.00-10	4PR	47F	TL	10.5 / 267	23.5 / 596	385 / 175	5.0 / 0.35	10X9.0AT	*
24X11.00-10	6PR		TL	10.5 / 267	23.2 / 590	440 / 200	7.0 / 0.50	10X9.0AT	
25X12.00-10	6PR		TL	11.6 / 295	24.2 / 615	495 / 224	7.0 / 0.50	10X9.5AT	
25X12.50-10	4PR	51F	TL	11.7 / 298	24.2 / 615	430 / 195	5.0 / 0.35	10X9.5AT	*
25X12.50-10	6PR		TL	11.6 / 295	24.2 / 615	495 / 224	7.0 / 0.50	10X9.5AT	
25X12.50-10	8PR	112F	TL	12.0 / 304	25.2 / 640	2456 / 1120	5.0 / 3.50	10X10.0AT	*
AT22X7-11	6PR		TL	6.9 / 175	22.0 / 559	255 / 115	7.0 / 0.50	11X5.5AT	
23X8.00-11	4PR	33F	TL	7.8 / 197	23.0 / 584	255 / 115	5.0 / 0.35	11X6.5AT	*
23X8.00-11	6PR		TL	7.8 / 198	22.8 / 580	290 / 132	7.0 / 0.50	11X6.5AT	
24X9.00-11	4PR	36F	TL	8.8 / 226	23.6 / 605	310 / 140	5.0 / 0.35	11X7.0AT	*
24X9.00-11	6PR		TL	8.8 / 225	23.7 / 603	365 / 165	7.0 / 0.50	11X7.0AT	
AT24X10-11	4PR		TL	9.5 / 242	23.5 / 598	340 / 155	5.0 / 0.35	11X7.5AT	
AT24X10-11	6PR		TL	9.45 / 240	23.6 / 600	395 / 180	7.0 / 0.50	11X7.5AT	
25X8.00-11	4PR	36F	TL	8.4 / 213	24.6 / 625	275 / 125	5.0 / 0.35	11X6.5AT	*
25X8.00-11	6PR		TL	8.3 / 210	24.5 / 622	340 / 155	7.0 / 0.50	11X6.5AT	
25X10.00-11	4PR	43F	TL	9.6 / 243	24.6 / 625	340 / 155	5.0 / 0.35	11X8.0AT	*
25X10.00-11	6PR		TL	9.6 / 243	24.4 / 621	420 / 190	7.0 / 0.50	11X8.0AT	
25X12.50-11	4PR	51F	TL	11.5 / 292	24.4 / 620	430 / 195	5.0 / 0.35	11X9.5AT	*
25X12.50-11	6PR		TL	11.5 / 292	24.4 / 620	495 / 224	7.0 / 0.50	11X9.5AT	
21X8.00-12	6PR		TL	8.0 / 203	21.0 / 533	700 / 318	20.0 / 1.4	12X7.0AT	
AT24X8-12	4PR	35F	TL	7.7 / 195	23.4 / 594	265 / 121	5.0 / 0.35	12X6.5AT	*
24X8.00-12	6PR	56F	TL	7.6 / 192	23.4 / 595	493 / 224	10.0 / 0.80	12X6.0AT	*
24X10.00-12	6PR	60F	TL	9.6 / 243	24.0 / 610	550 / 250	12.0 / 0.85	12X8.0AT	*
25X8.00-12	4PR	38F	TL	8.1 / 205	24.6 / 625	290 / 132	5.0 / 0.35	12X6.5AT	*
25X8.00-12	6PR	43N	TL	8.1 / 205	24.3 / 618	340 / 155	7.0 / 0.50	12X6.5AT	*
25X10.00-12	4PR	45F	TL	9.3 / 236	24.5 / 623	365 / 165	5.0 / 0.35	12X8.0AT	*
25X10.00-12	6PR	50N	TL	9.1 / 232	24.5 / 623	420 / 190	7.0 / 0.50	12X8.0AT	*
25X12.50-12	4PR	51F	TL	11.4 / 290	25.2 / 640	430 / 195	5.0 / 0.35	12X9.5AT	*
AT25X12.5-12	6PR		TL	11.4 / 290	25.2 / 640	495 / 224	7.0 / 0.50	12X9.5AT	
AT26X9-12	4PR	47F	TL	9.2 / 233	26.0 / 660	385 / 175	5.0 / 0.35	12X7.0AT	*
AT26X9-12	6PR	50N	TL	9.0 / 228	26.0 / 660	420 / 190	7.0 / 0.50	12X7.0AT	*
AT26X11-12	6PR	55N	TL	11.0 / 279	26.2 / 665	418 / 218	7.0 / 0.50	12X9.0AT	*
26X12.00-12	4PR	51F	TL	11.5 / 292	25.2 / 640	430 / 195	5.0 / 0.35	12X10.5AT	*
AT26X12-12	6PR	58L	TL	11.6 / 295	25.2 / 640	520 / 236	7.0 / 0.50	12X10.5AT	*
26X12.00-12	8PR		TL	11.5 / 292	26.3 / 668	2465 / 1120	50.0 / 3.5	12X10.50AT	
AT27X9-12	6PR	52N	TL	9.0 / 230	27.0 / 686	440 / 200	7.0 / 0.50	12X7.0AT	*
27X10.00-12	4PR	45F	TL	9.6 / 245	25.6 / 650	360 / 165	5.0 / 0.35	12X8.5AT	*
27X10.00-12	6PR	54N	TL	9.6 / 245	25.6 / 650	465 / 212	7.0 / 0.50	12X8.5AT	*
AT27X11-12	6PR	56N	TL	11.0 / 279	27.0 / 686	494 / 224	7.0 / 0.50	12X9.0AT	*
27X12.00-12	4PR	51F	TL	11.8 / 299	25.9 / 659	430 / 195	5.0 / 0.35	12X10.5AT	*
AT27X12-12	6PR	60L	TL	11.7 / 298	25.8 / 655	550 / 250	7.0 / 0.50	12X10.5AT	*



K299A BEAR CLAW XL

- Deeper tread pattern than original Bear Claw.
- Side biting knobs to gain traction in loose conditions.
- Perfect for loamy and muddy soil.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
AT24X10-11	4PR	48F	TL	10.0 / 254	24.0 / 610	340 / 155	5.0 / 0.35	11X8.0AT	*
AT24X8-12	4PR	35F	TL	8.0 / 203	24.0 / 610	265 / 121	5.0 / 0.35	12X6.5AT	*
AT25X8-12	4PR	38F	TL	8.1 / 205	25.0 / 635	290 / 132	5.0 / 0.35	12X7.0AT	*
AT25X10-12	4PR	45F	TL	10.0 / 254	25.0 / 635	365 / 165	5.0 / 0.35	12X8.5AT	*
AT25X12.50-12	4PR	51F	TL	11.8 / 300	25.2 / 639	430 / 195	5.0 / 0.35	12X10.5AT	*
AT26X10-12	6PR	52F	TL	10.0 / 254	26.0 / 660	200 / 440	7.0 / 0.50	12X8.0AT	*
AT26X12-12	6PR	58F	TL	12.0 / 254	26.0 / 660	236 / 520	7.0 / 0.50	12X9.5AT	*
AT27X9-12	6PR	52F	TL	9.0 / 228	27 / 686	440 / 200	7.0 / 0.50	12X7.0AT	*



K530 PATHFINDER

- Lightweight replacement tire at excellent price point.
- Shallower tread depth to reduce knob dig on grass and other maintained surfaces.



FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
16X8.00-7	2PR	28F	TL	7.4 / 188	15.6 / 397	220 / 100	5.0 / 0.35	7X6.5AT	*
18X7.00-7	2PR	23F	TL	6.9 / 175	17.2 / 438	195 / 87.5	5.0 / 0.35	7X6.0AT	*
19X7.00-8	2PR	30F	TL	7.0 / 178	18.8 / 478	233 / 106	5.0 / 0.35	8X6.0AT	*
AT21X7-10	4PR	25F	TL	6.9 / 175	20.5 / 520	205 / 92.5	5.0 / 0.35	10X5.5AT	*
AT21X7-10	6PR	42L	TL	6.9 / 175	20.7 / 526	330 / 150	7.0 / 0.50	10X5.5AT	*
AT22X7-10	4PR	28N / 28F	TL	7.2 / 182	21.7 / 552	220 / 100	5.0 / 0.35	10X5.5AT	*
22X7.00-10	6PR	38J	TL	7.1 / 180	21.7 / 552	290 / 132	10.0 / 0.70	10X5.5AT	*
23X8.00-11	2PR		TL	7.4 / 188	23.0 / 585	210 / 95	5.0 / 0.35	11X6.5AT	*
23X8.00-11	4PR	33F	TL	8.1 / 207	23.1 / 586	255 / 115	5.0 / 0.35	11X6.5AT	*
AT23X8-12	4PR	32J	TL	7.3 / 185	23.1 / 586	245 / 112	5.0 / 0.35	12X6.0AT	*
AT23X8-12	4PR	33G	TL	7.3 / 185	23.1 / 586	255 / 115	5.0 / 0.35	12X6.0AT	*
AT24X8-12	2PR		TL	7.7 / 195	23.2 / 590	220 / 100	5.0 / 0.35	12X6.5AT	*
AT24X8-12	4PR	35J	TL	7.7 / 195	23.6 / 600	265 / 121	5.0 / 0.35	12X6.5AT	*
AT24X8-12	6PR	48J	TL	7.7 / 195	23.5 / 597	395 / 180	7.0 / 0.50	12X6.5AT	*
AT25X8-12	4PR	38N	TL	7.8 / 197	25.0 / 635	290 / 132	5.0 / 0.35	12X6.5AT	*
AT25X8-12	6PR	43N	TL	7.6 / 192	24.7 / 628	340 / 155	7.0 / 0.50	12X6.0AT	*

REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
18X9.50-8	2PR	30F	TL	9.2 / 234	18.1 / 459	233 / 106	5.0 / 0.35	8X7.0AT	*
18X9.50-8	4PR	30F	TL	9.2 / 234	18.1 / 459	233 / 106	5.0 / 0.35	8X7.0AT	*
22X11.00-8	2PR		TL	10.8 / 275	22.0 / 558	275 / 125	5.0 / 0.35	8X9.0AT	*
22X11.00-9	2PR		TL	10.9 / 276	22.0 / 558	275 / 125	5.0 / 0.35	9X9.0AT	*
22X11.00-9	4PR		TL	10.9 / 276	22.0 / 558	275 / 125	5.0 / 0.35	9X9.0AT	*
22X11.00-9	6PR	56L	TL	11.1 / 281	21.7 / 552	495 / 224	7.0 / 0.50	9X9.0AT	*
25X12.00-9	2PR		TL	11.4 / 286	24.5 / 622	355 / 160	5.0 / 0.35	9X9.5AT	*
25X12.00-9	4PR	51F	TL	11.4 / 286	24.5 / 622	430 / 195	5.0 / 0.35	9X9.5AT	*
AT22X9-10	4PR	28F	TL	9.2 / 234	21.7 / 552	220 / 100	5.0 / 0.35	10X8.0AT	*
AT22X10-10	4PR	39N / 39F	TL	10.0 / 254	21.9 / 555	300 / 136	5.0 / 0.35	10X8.0AT	*
22X11.00-10	2PR		TL	10.5 / 267	21.1 / 537	265 / 121	5.0 / 0.35	10X9.0AT	*
AT22X11-10	4PR		TL	10.5 / 267	21.1 / 537	330 / 150	5.0 / 0.35	10X9.0AT	*
22X11.00-10	4PR		TL	10.5 / 267	21.1 / 537	330 / 150	5.0 / 0.35	10X9.0AT	*
25X12.00-10	2PR		TL	10.9 / 278	23.7 / 602	355 / 160	5.0 / 0.35	10X9.5AT	*
25X12.00-10	4PR		TL	10.9 / 278	23.7 / 602	430 / 195	5.0 / 0.35	10X9.5AT	*
24X9.00-11	2PR		TL	9.0 / 229	23.7 / 603	255 / 115	5.0 / 0.35	11X7.0AT	*
24X9.00-11	4PR		TL	9.0 / 229	23.7 / 603	310 / 140	5.0 / 0.35	11X7.0AT	*
AT24X9-11	4PR	33F	TL	9.0 / 229	23.7 / 603	255 / 115	5.0 / 0.35	11X7.0AT	*
AT23X10-12	4PR	40J	TL	9.3 / 236	23.0 / 584	310 / 140	5.0 / 0.35	12X7.5AT	*
AT24X10-12	4PR	42J	TL	9.8 / 250	23.9 / 608	330 / 150	5.0 / 0.35	12X8.0AT	*
AT25X10-12	4PR	45F / 45N	TL	9.4 / 240	25.0 / 635	365 / 165	5.0 / 0.35	12X8.0AT	*
AT25X10-12	6PR	50N	TL	9.7 / 247	24.9 / 632	420 / 190	7.0 / 0.50	12X8.0AT	*





K537 BOUNTY HUNTER ST

- Designed specifically for Side by Side machines.
- Directional tread pattern designed for front or rear applications on intermediate to soft terrain.
- Heavy-duty 8ply rated casing resists punctures and improves ride quality and handling.
- High load capacity radial casing.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT23X8R12	6PR	37N	TL	8.1 / 205	23.1 / 586	280 / 128	7.0 / 0.50	12X7.0AT	*
AT23X10R12	6PR	45N	TL	9.8 / 250	23.0 / 583	365 / 165	7.0 / 0.50	12X8.0AT	*
AT25X8R12	4PR	38F	TL	8.3 / 212	25.2 / 639	290 / 132	5.0 / 0.35	12X7.0AT	*
AT25X8R12	6PR	43J	TL	8.3 / 212	25.2 / 639	342 / 155	7.0 / 0.35	12X7.0AT	*
AT25X10R12	4PR	45F	TL	10.0 / 256	25.1 / 638	365 / 165	5.0 / 0.35	12X8.0AT	*
AT25X10R12	6PR	50J	TL	10.0 / 256	25.0 / 638	419 / 190	7.0 / 0.50	12X8.0AT	*
AT26X10R14	6PR	51J	TL	10.0 / 254	26.0 / 660	430 / 195	7.0 / 0.50	14X8.0AT	*
AT26X12R14	6PR	57J	TL	11.2 / 285	25.9 / 657	505 / 230	7.0 / 0.50	14X8.0AT	*



K538 EXECUTIONER

- Designed to meet the demands of the muddiest 4x4 riding terrain.
- Tread design for deep down traction, even in the muddiest conditions.
- Reinforced knobs to reduce knob rollover at low pressure, improve ride comfort and increase tread life.
- Dimpled tread surface for improved traction on drier conditions.
- 6ply rated with extra tough casing resists punctures.
- Rim saver feature for protection against rock and rut damage.




SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT25X8-12	6PR	43L	TL	8.3 / 210	24.8 / 630	340 / 155	7.0 / 0.50	12X7.0AT	*
AT25X10-12	6PR	50L	TL	9.6 / 245	24.8 / 630	420 / 190	7.0 / 0.50	12X8.0AT	*
AT26X10-12	6PR	52L	TL	9.5 / 242	26.0 / 660	440 / 200	7.0 / 0.50	12X8.0AT	*
AT26X12-12	6PR	58L	TL	12.0 / 304	26.0 / 660	520 / 236	7.0 / 0.50	12X9.5AT	*
AT27X10-12	6PR	54L	TL	9.8 / 250	27.1 / 688	465 / 212	7.0 / 0.50	12X7.0AT	*
AT27X12-12	6PR	60L	TL	11.3 / 287	27.2 / 691	550 / 250	7.0 / 0.50	12X8.5AT	*
AT28X9-14	6PR	51L	TL	8.5 / 216	28.0 / 711	430 / 195	7.0 / 0.50	14X7.0AT	*
AT28X11-14	6PR	58L	TL	10.4 / 263	27.9 / 708	520 / 236	7.0 / 0.50	14X8.0AT	*



K573 BEAR CLAW EX

- Designed for aggressive riding in mixed terrain.
- Ramp edge center knobs for reduced rolling resistance.
- High sidewall casing protector to resist punctures.
- Rim saver feature for protecting against rock and rut damage.
- 6ply rated extra tough casing to resist punctures.



FRONT

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT21X7-10	6PR	30N	TL	7.0 / 177	20.7 / 527	235 / 106	7.0 / 0.50	10X5.5AT	*
AT22X7-10	6PR	33N	TL	6.8 / 172	21.8 / 553	255 / 115	7.0 / 0.50	10X5.5AT	*
AT22X8-10	6PR	36N	TL	8.2 / 208	21.9 / 556	275 / 125	7.0 / 0.50	10X6.5AT	*
AT23X8-10	6PR	39N	TL	8.0 / 203	22.8 / 578	300 / 136	7.0 / 0.50	10X6.5AT	*
AT23X8-11	6PR	38N	TL	7.4 / 189	23.0 / 584	290 / 132	7.0 / 0.50	11X6.5AT	*
AT24X8-11	6PR	41N	TL	7.9 / 200	23.6 / 600	320 / 145	7.0 / 0.50	11X6.5AT	*
AT24X9-11	6PR	45N	TL	8.8 / 223	24.0 / 605	365 / 165	7.0 / 0.50	11X7.0AT	*
AT25X8-12	4PR	38N	TL	8.0 / 204	25.0 / 635	290 / 132	5.0 / 0.35	12X6.5AT	*
AT25X8-12	6PR	43N	TL	8.0 / 204	25.0 / 635	340 / 155	7.0 / 0.50	12X6.5AT	*
AT26X10-12	6PR	52L	TL	9.8 / 249	25.9 / 657	441 / 200	7.0 / 0.50	12X8.0AT	*
AT27X10-12	6PR	54L	TL	9.8 / 249	26.8 / 680	467 / 212	7.0 / 0.50	12X8.0AT	*

REAR

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT22X11-8	6PR	48N	TL	11.0 / 280	21.9 / 557	395 / 180	7.0 / 0.50	8X9.0AT	*
AT22X11-9	6PR	48N	TL	11.0 / 280	22.0 / 559	395 / 180	7.0 / 0.50	9X9.0AT	*
AT25X12-9	6PR	56N	TL	11.2 / 285	25.0 / 635	495 / 224	7.0 / 0.50	9X9.5AT	*
AT22X11-10	6PR	47N	TL	11.0 / 281	22.1 / 562	385 / 175	7.0 / 0.50	10X9.0AT	*
AT23X10-10	6PR	46N	TL	9.8 / 250	23.1 / 588	375 / 170	7.0 / 0.50	10X8.0AT	*
AT24X11-10	6PR	52N	TL	10.9 / 277	23.8 / 605	440 / 200	7.0 / 0.50	10X9.0AT	*
AT25X11-10	6PR	30N	TL	10.9 / 278	25.2 / 640	455 / 206	7.0 / 0.50	10X9.0AT	*
AT24X10-11	6PR	48N	TL	9.6 / 245	23.7 / 602	395 / 180	7.0 / 0.50	11X8.0AT	*
AT25X10-11	6PR	50N	TL	9.8 / 250	24.7 / 628	420 / 190	7.0 / 0.50	11X8.0AT	*
AT25X10-12	4PR	45N	TL	9.8 / 248	25.1 / 637	315 / 115	5.0 / 0.35	12X8.0AT	*
AT25X10-12	6PR	50N	TL	9.6 / 244	25.1 / 637	365 / 165	7.0 / 0.50	12X8.0AT	*
AT26X12-12	6PR	58L	TL	11.4 / 290	25.9 / 660	520 / 236	7.0 / 0.50	12X9.5AT	*
AT27X12-12	6PR	60L	TL	11.6 / 294	27.0 / 686	550 / 250	7.0 / 0.50	12X9.5AT	*






K585 BOUNTY HUNTER HT

- Designed for ATV 7PSI & UTV 12PSI dual applications.
- Extra tough heavy duty 8ply rated casing structure offers up to 225% higher load carrying on 12" sizes.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT25X8R12	8PR	43N	TL	8.3 / 210	25.0 / 634	340 / 155	7.0 / 0.50	12X7.0AT	*
AT25X10R12	8PR	50N	TL	10.0 / 254	25.0 / 636	420 / 190	7.0 / 0.50	12X8.0AT	*
AT26X9R12	8PR	49N	TL	9.3 / 236	25.8 / 656	408 / 185	7.0 / 0.50	12X7.0AT	*
AT26X11R12	8PR	55N	TL	11.2 / 285	25.7 / 654	481 / 218	7.0 / 0.50	12X8.0AT	*
AT27X9R12	8PR	52N	TL	9.3 / 236	26.6 / 676	440 / 200	7.0 / 0.50	12X7.0AT	*
AT27X11R12	8PR	56N	TL	11.0 / 281	26.6 / 676	494 / 224	7.0 / 0.50	12X8.0AT	*
AT26X9R14	8PR	48N	TL	8.9 / 226	26.3 / 668	396 / 180	7.0 / 0.50	14X7.0AT	*
AT26X11R14	8PR	54N	TL	11.0 / 279	26.0 / 660	465 / 212	7.0 / 0.50	14X8.0AT	*

CROSS SECTION OF THE BOUNTY HUNTER

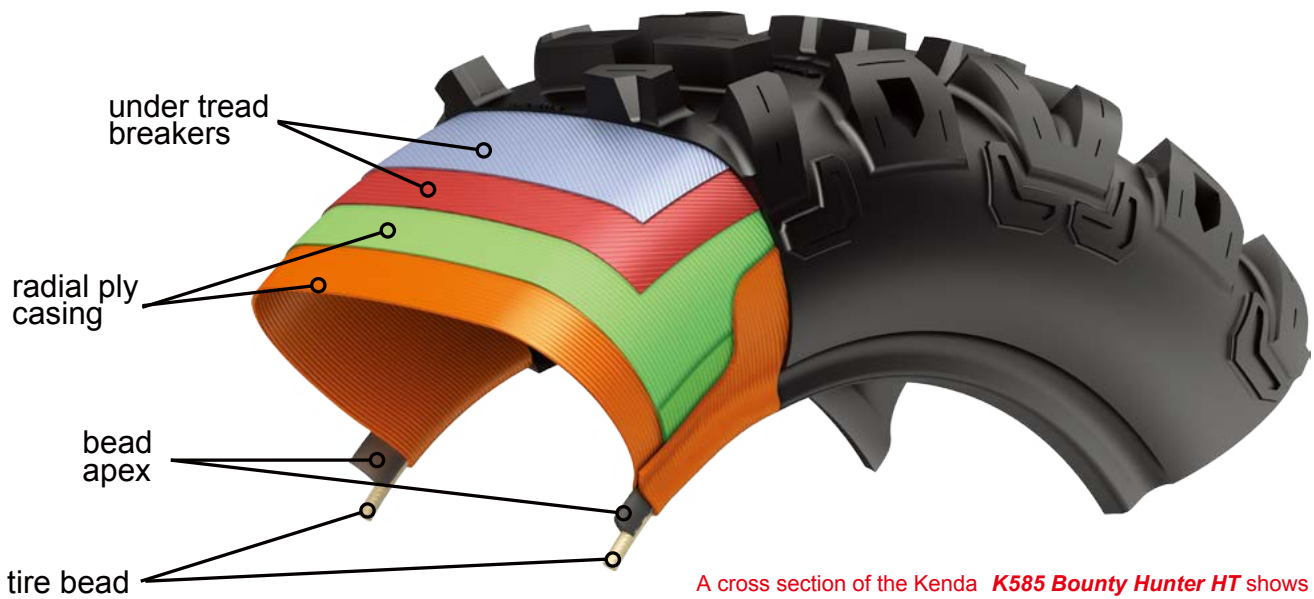


A cross section of the Kenda **K585 Bounty Hunter HT** shows the various components that make-up its structure.



K587 BEAR CLAW HTR

- 8ply rated radial casing structure providing the highest level of puncture resistance and excellent handling.
- Tread pattern provides high traction on a wide range of terrain.
- Center knob design provides low vibration and a smooth ride.
- Tall knobs dig into the dirt and mud and are spaced for self-cleaning.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
AT25X8R12	8PR	43N	TL	8.2 / 208	25.4 / 645	340 / 155	7.0 / 0.50	12X7.0AT	*
AT25X10R12	8PR	50N	TL	10.0 / 254	25.4 / 645	420 / 190	7.0 / 0.50	12X8.0AT	*
AT26X9R12	8PR	49N	TL	9.1 / 230	26.4 / 670	408 / 185	7.0 / 0.50	12X7.0AT	*
AT26X11R12	8PR	55N	TL	11.1 / 281	26.5 / 674	481 / 218	7.0 / 0.50	12X8.0AT	*
AT27X9R12	8PR	52N	TL	9.2 / 234	27.2 / 691	440 / 200	7.0 / 0.50	12X7.0AT	*
AT27X11R12	8PR	56N	TL	11.0 / 279	27.4 / 696	494 / 224	7.0 / 0.50	12X8.0AT	*
AT26X9R14	8PR	48N	TL	9.3 / 236	26.4 / 670	396 / 180	7.0 / 0.50	14X7.0AT	*
AT26X11R14	8PR	54N	TL	10.9 / 276	26.4 / 670	465 / 212	7.0 / 0.50	14X8.0AT	*
AT27X9.5R14	8PR		TL	9.61 / 244	27.2 / 691	520 / 236	7.0 / 0.50	14X7.0AT	*
AT28X9R14	8PR	51L	TL	8.66 / 220	28.1 / 714	430 / 195	7.0 / 0.50	14X7.0AT	*
AT28X11R14	8PR	58L	TL	10.4 / 264	28.1 / 714	520 / 236	7.0 / 0.50	14X8.0AT	*



K590

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
25X8.00-12	4PR	56F	TL	7.2 / 184	25.0 / 635	494 / 224	10.0 / 0.70	12X6.0AT	*
AT25X8-12	6PR		TL	7.2 / 184	25.0 / 635	340 / 155	7.0 / 0.5	12X6.0AT	
AT25X10-12	6PR	50N	TL	9.6 / 244	25.0 / 635	420 / 190	7.0 / 0.5	12X8.0AT	*
25X11.00-12	4PR	66F	TL	10.5 / 267	25.0 / 636	660 / 300	10.0 / 0.70	12X8.0AT	*
AT26X9-14	6PR		TL	8.9 / 227	26.0 / 660	395 / 180	7.0 / 0.50	14X7.0AT	
AT26X11-14	6PR		TL	10.6 / 268	26.0 / 660	465 / 212	7.0 / 0.50	14X8.0AT	



K3201 MASTODON HT LITE

- Smooth ride quality with light truck tire influenced tread pattern.
- Built to excel in both high-speed desert conditions, as well as tight rocky terrain.



SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT25X8-12	4PR	38N	TL	8.0 / 203	25 / 635	290 / 132	5.0 / 0.35	12X7.0AT	*
AT25X10-12	4PR	45N	TL	10.16 / 258	25 / 635	365 / 165	5.0 / 0.35	12X8.0AT	*



K3215

SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT25X8-12	6PR	43N	TL	7.80 / 198	24.33 / 618	342 / 155	7 / 0.492	6.0	*
AT25X10-12	6PR	50N	TL	9.37 / 238	25.07 / 637	420 / 190	7 / 0.492	7.5	*

SIDE-BY-SIDE UTILITY TIRE



K3213 CROSSTRAIL

- Aggressive tread pattern purposefully designed to maximize traction and grip even in the harshest conditions.
- Sharp tread edges and optimum tread void ensures exceptional bite and self-cleaning capabilities to conquer mud, rocks, sand, roots and hard pack.
- Aggressive shoulder lugs enhance forward traction in deep ruts and mud.
- Uncompromised aggression, reliability, and performance.



○ = FOR US MARKET
■ = FOR EUROPEAN MARKET

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK	
○ UT27X9.00R14	79M	TL	8.98 / 228	27.6 / 701	965 / 437	25 / 1.76	14X7.0J		
○ UT27X11.00R14	81M	TL	11.38 / 289	28.11 / 714	1020 / 462	25 / 1.76	14X9.0J		
○ UT28X9.00R14	82M	TL	8.93 / 227	28.31 / 719	1050 / 475	25 / 1.76	14X7.0J		
○ UT28X10.00R14	84M	TL	10.71 / 272	28.66 / 728	1100 / 500	25 / 1.76	14X8.0J		
○ UT29X9.00R14	85M	TL	9.25 / 235	29.33 / 745	1140 / 515	25 / 1.76	14X7.0J		
○ UT29X11.00R14	88M	TL	11.69 / 297	29.76 / 756	1230 / 560	25 / 1.76	14X9.0J		
○ UT30X9.00R14	88M	TL	9.44 / 240	30.51 / 775	1230 / 560	25 / 1.76	14X7.0J		
○ UT30X10.00R14	89M	TL	10.31 / 262	30.43 / 773	1280 / 580	25 / 1.76	14X8.0J		
○ UT32X10.00R14	94M	TL	10.63 / 270	32.56 / 827	1480 / 670	25 / 1.76	14X8.0J		
○ UT30X10.00R15	88M	TL	9.37 / 238	30.43 / 773	1230 / 520	25 / 1.76	15X7.0J		
○ UT30X11.00R15	89M	TL	11.02 / 280	30.35 / 771	1280 / 580	25 / 1.76	15X7.0J		
○ UT32X10.00R15	93M	TL	10.3 / 262	32.6 / 830	1430 / 650	25 / 1.76	15X8.0J		
○ UT33X10.00R15	96M	TL	10.79 / 274	33.78 / 858	1570 / 710	25 / 1.76	15X8.0J		
○ UT35X10.00R15	99M	TL	10.63 / 270	34.8 / 884	1710 / 775	25 / 1.76	15X8.0J		
■ 27X9.00R14	8PR	79M	TL	8.98 / 228	27.6 / 701	965 / 437	25 / 1.76	14X7.0J	*
■ 27X11.00R14	8PR	81M	TL	11.38 / 289	28.11 / 714	1020 / 462	25 / 1.76	14X9.0J	*
■ 28X10.00R14	8PR	84M	TL	10.71 / 272	28.66 / 728	1100 / 500	25 / 1.76	14X8.0J	*
■ 29X9.00R14	8PR	85M	TL	9.25 / 235	29.33 / 745	1140 / 515	25 / 1.76	14X7.0J	*
■ 29X11.00R14	8PR	88M	TL	11.69 / 297	29.76 / 756	1230 / 560	25 / 1.76	14X9.0J	*
■ 30X10.00R14	8PR	89M	TL	10.31 / 262	30.43 / 773	1280 / 580	25 / 1.76	14X8.0J	*
■ 32X10.00R14	8PR	90M	TL	10.63 / 270	32.56 / 827	1320 / 600	25 / 1.76	14X8.0J	*
■ 30X10.00R15	8PR	88M	TL	9.37 / 238	30.43 / 773	1230 / 560	25 / 1.76	15X7.0J	*
■ 32X10.00R15	8PR	90M	TL	11.14 / 283	32.72 / 831	1320 / 600	25 / 1.76	15X8.0J	*

K3214 WARHAWK

- Aggressive All Terrain tread pattern.
- Deep tread depth and increased void allows for maximum traction and self-cleaning.
- Advanced, high strength proprietary compound that allows for long term wear without sacrificing wet and dry traction characteristics.
- Reinforced Side Wall construction technology that's resists cuts and punctures.
- 8 ply tire rated radial construction.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
UT30X10.00R14	8PR	TL	10.24 / 260	29.84 / 758	1278 / 580	25 / 1.76	14X8.0J	
UT32X10.00R14	8PR	TL	10.24 / 260	32.17 / 817	1477 / 670	25 / 1.76	14X8.0J	
UT32X10.00R15	8PR	TL	10.63 / 270	32.32 / 821	1430 / 650	25 / 1.76	15X8.0J	
UT33X10.00R15	8PR	TL	10.24 / 260	32.99 / 838	1570 / 710	25 / 1.76	15X8.0J	
UT35X10.00R15	8PR	TL	10.24 / 260	35.00 / 889	1708 / 775	25 / 1.76	15X8.0J	



K3201 MASTODON HT

- Ultimate trail and hard terrain UTV/SxS tire.
- Smooth ride quality with light truck tire influenced tread pattern.
- Built to excel in both high-speed desert conditions, as well as tight rocky terrain.
- Heavy duty Radial 8ply rated casing for the ultimate in puncture resistance.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
25X8.00R12	8PR	43N	TL 8.03 / 204	25.75 / 654	342 / 155	24 / 1.7	12X7.0AT	*
25X10.00R12	8PR	50N	TL 9.84 / 250	26.14 / 664	419 / 190	24 / 1.7	12X8.0AT	*
26X9.00R12	8PR	49N	TL 9.13 / 232	27.13 / 689	408 / 185	24 / 1.7	12X7.0AT	*
26X11.00R12	8PR	55N	TL 10.98 / 279	27.13 / 689	480 / 218	24 / 1.7	12X8.0AT	*
26X9.00R14	8PR	48N	TL 8.82 / 220	27.40 / 693	397 / 180	24 / 1.7	14X7.0AT	*
26X11.00R14	8PR	56N	TL 10.79 / 269	27.36 / 695	494 / 224	26 / 1.8	14X8.0AT	*
27X9.00R12	8PR	66M	TL 8.82 / 224	27.40 / 696	661 / 300	38 / 2.7	12X7.0AT	*
27X11.00R12	8PR	71M	TL 10.67 / 271	27.40 / 696	761 / 345	38 / 2.7	12X9.0AT	*
28X9.00R14	8PR	67M	TL 8.78 / 223	28.00 / 711	677 / 307	38 / 2.7	14X7.0AT	*
28X10.00R14	8PR	59M	TL 9.76 / 248	29.06 / 738	536 / 243	22 / 1.5	14X8.0AT	*
28X11.00R14	8PR	73M	TL 10.47 / 266	28.00 / 711	805 / 365	38 / 2.7	14X9.0AT	*
30X10.00R14	8PR	63M	TL 10.16 / 258	30.79 / 782	600 / 272	22 / 1.5	14X8.0AT	*
32X10.00R14	8PR	78M	TL 10.04 / 255	32.00 / 813	937 / 425	38 / 2.7	14X8.0AT	*
30X10.00R15	8PR	73M	TL 9.76 / 248	30.00 / 762	805 / 365	38 / 2.7	15X8.0AT	*
32X10.00R15	8PR	77M	TL 9.96 / 253	32.00 / 813	908 / 412	38 / 2.7	15X8.0AT	*
33X10.00R15	8PR	80M	TL 10.00 / 254	33.00 / 838	992 / 450	38 / 2.7	15X8.0AT	*
35X10.00R15	8PR	84M	TL 10.20 / 259	35.00 / 889	1102 / 500	38 / 2.7	15X8.0AT	*



K3203 MASTODON AT

- Part of the all-new MASTODON line, the AT was designed to be the ultimate "do-it-all" UTV/SxS tire.
- Aggressive, open tread design for good clean out performance in mud.
- Large contact patch on harder ground conditions for superior traction and durability.
- Heavy duty Radial 8ply rated casing for the ultimate in puncture resistance.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
25X8.00R12	8PR	43N	TL 8.35 / 212	25.51 / 648	342 / 155	24 / 1.7	12X7.0AT	*
25X10.00R12	8PR	50N	TL 9.92 / 252	25.75 / 654	419 / 190	24 / 1.7	12X8.0AT	*
26X9.00R12	8PR	49N	TL 9.17 / 233	27.24 / 692	408 / 185	24 / 1.7	12X7.0AT	*
26X11.00R12	8PR	55N	TL 10.91 / 277	27.13 / 689	480 / 218	24 / 1.7	12X8.0AT	*
26X9.00R14	8PR	48N	TL 8.70 / 221	27.56 / 700	397 / 180	24 / 1.7	14X7.0AT	*
26X11.00R14	8PR	56N	TL 10.31 / 262	27.36 / 695	494 / 224	26 / 1.8	14X8.0AT	*
27X9.00R12	8PR	66M	TL 8.82 / 224	27.40 / 696	481 / 218	38 / 2.7	12X7.0AT	*
27X11.00R12	8PR	71M	TL 10.80 / 274	27.60 / 702	567 / 257	38 / 2.7	12X9.0AT	*
28X9.00R14	8PR	67M	TL 8.78 / 223	28.00 / 711	677 / 307	38 / 2.7	14X7.0AT	*
28X10.00R14	8PR	59M	TL 9.84 / 250	29.06 / 738	536 / 243	22 / 1.5	14X8.0AT	*
28X11.00R14	8PR	73M	TL 10.55 / 268	28.30 / 719	805 / 365	38 / 2.7	14X9.0AT	*
30X10.00R14	8PR	63M	TL 10.24 / 260	30.91 / 785	600 / 272	22 / 1.5	14X8.0AT	*
32X10.00R14	8PR	78M	TL 10.00 / 254	32.00 / 813	937 / 425	38 / 2.7	14X8.0AT	*
30X10.00R15	8PR	73M	TL 9.76 / 248	30.00 / 762	805 / 365	38 / 2.7	15X8.0AT	*
32X10.00R15	8PR	77M	TL 10.12 / 257	32.00 / 813	908 / 412	38 / 2.7	15X8.0AT	*
33X10.00R15	8PR	80M	TL 10.16 / 258	33.00 / 838	992 / 450	38 / 2.7	15X8.0AT	*
35X10.00R15	8PR	84M	TL 10.20 / 259	35.00 / 889	1102 / 500	38 / 2.7	15X8.0AT	*



K3204R KLEVER XT

- Based on our popular KR601 light truck design, the XT brings the performance of steel belted radial design to UTVs.
- Studdable design for winter snow and ice riding.
- Smooth ride quality with low rolling resistance and exceptional traction on all surfaces.
- Robust bead protector to shield wheel from rocks.



SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
27X9.00R14	8PR	65M	TL	8.98 / 228	27.17 / 690	635 / 288	38 / 2.7	14X7.0 *
27X11.00R14	8PR	71M	TL	11.46 / 291	27.17 / 690	760 / 345	38 / 2.7	14X9.0 *
28X10.00R14	8PR	70M	TL	10.04 / 255	28.07 / 713	739 / 335	38 / 2.7	14X7.0 *
30X10.00R14	8PR	74M	TL	10.71 / 272	30.31 / 770	827 / 375	38 / 2.7	14X8.0 *
32X10.00R14	8PR	79M	TL	10 / 254	32.13 / 816	963 / 437	38 / 2.7	14X8.0 *
30X10.00R15	8PR	74M	TL	10 / 254	30.16 / 766	827 / 375	38 / 2.7	15X8.0 *
32X10.00R15	8PR	78M	TL	10 / 254	32.2 / 818	937 / 425	38 / 2.7	15X8.0 *
33X10.00R15	8PR	80M	TL	10.51 / 267	32.87 / 835	992 / 450	38 / 2.7	15X8.0 *
35X10.00R15	8PR	84M	TL	10.35 / 263	35 / 889	1102 / 500	38 / 2.7	15X8.0 *
37X10.00R15	8PR	88M	TL	10 / 254	37 / 940	1235 / 560	38 / 2.7	15X8.0 *
32X10.00R16	8PR	77M	TL	10 / 254	32 / 813	908 / 412	38 / 2.7	16X8.0 *
35X10.00R16	8PR	84M	TL	10 / 254	35.24 / 895	1102 / 500	38 / 2.7	16X8.0 *





ATV SPORT RACING TIRE



K3210F / K3211 HAVOK

- Designed and tested in cooperation with top pro racers worldwide.
- Excellent forward traction and predictable lateral control.
- Rubber compound developed for superior wet & dry traction.
- Puncture-resistant 6ply casing.
- Non-directional tread pattern.
- Available in both front and rear sizing.

HAVOK
KENDA

FRONT

	SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
MX	AT20X6-10	4PR	17F	TL	6 / 152	20 / 508	160 / 73	5.0 / 0.35	10X5.0AT	*
XC	AT21X7-10	6PR	30N	TL	6.8 / 173	21.3 / 541	235 / 106	7.0 / 0.50	10X5.5AT	*
XC	23X7.00-10	6PR	36J	TL	7 / 178	23 / 584	275 / 125	8.0 / 0.56	10X5.5AT	*



REAR

	SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
MX	AT18X8-8	4PR	22J	TL	8 / 203	18 / 457	187 / 85	5.0 / 0.35	8X7.0AT	*
MX	AT18X10-8	4PR	29J	TL	10 / 254	18 / 457	227 / 103	5.0 / 0.35	8X8.5AT	*
MX	AT18X10-9	4PR	32J	TL	10 / 254	18 / 457	246 / 112	7.0 / 0.50	9X8.0AT	*
XC	AT20X11-9	6PR	43N	TL	10.9 / 277	20.1 / 511	340 / 155	7.0 / 0.50	9X9.0AT	*
XC	22X11.00-9	6PR	48J	TL	279 / 11	22 / 559	396 / 180	8.0 / 0.56	9X9.0AT	*



K300 DOMINATOR

- Excellent choice for weekend recreational riders.
- Split-knob design for better cornering and braking.
- Tough, durable casing and long-range compound.



FRONT

	SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
	AT20X7-8	4PR	23F	TL	7.0 / 177	20.0 / 508	195 / 87.5	5.0 / 0.35	8X5.5AT	*
	AT21X7-10	4PR	25F	TL	7.3 / 185	20.5 / 520	205 / 92.5	5.0 / 0.35	10X5.5AT	*
	22X8.00-10	4PR	31F	TL	7.8 / 197	22.1 / 561	240 / 109	5.0 / 0.35	10X6.0AT	*
	22X8.00-10	6PR		TL	7.6 / 194	22.2 / 563	275 / 125	7.0 / 0.50	10X6.0AT	



REAR

	SIZE	SPEED/LOAD RATING			WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KG / CM ²	RIM (INCH)	E MARK
	AT19X8-8	4PR		TL	7.8 / 198	19.02 / 483	200 / 90	5.0 / 0.35	8X6.0AT	
	20X11.00-8	4PR	38F	TL	10.6 / 269	20.4 / 518	290 / 132	5.0 / 0.35	8X9.0AT	*
	AT21X10-8	4PR	37F	TL	10.5 / 267	20.2 / 513	280 / 128	5.0 / 0.35	8X8.0AT	*
	AT22X10-8	4PR	39F	TL	10.0 / 254	22.0 / 558	300 / 136	5.0 / 0.35	8X8.0AT	*
	AT22X11-8	4PR	43F	TL	10.8 / 275	22.0 / 559	340 / 155	5.0 / 0.35	8x9.0AT	*
	20X11.00-9	4PR	38F	TL	10.9 / 277	20.0 / 508	290 / 132	5.0 / 0.35	9X9.0AT	*
	AT22X11-9	4PR	43F	TL	10.9 / 280	21.3 / 450	340 / 155	5.0 / 0.35	9X9.0AT	*
	20X11.00-10	4PR	37F	TL	10.5 / 266	20.4 / 518	280 / 128	5.0 / 0.35	10X9.0AT	*
	AT22X10-10	4PR	39F	TL	9.7 / 247	22.0 / 558	300 / 136	5.0 / 0.35	10X8.0AT	*
	AT22X11-10	4PR	42F	TL	10.5 / 268	21.9 / 557	330 / 150	5.0 / 0.35	10X9.0AT	*



K532F KLAW

- Meets the demands of the motocross track and cross country terrain.
- Soft to medium terrain, medium to hard terrain.
- Matches with the Klaw or Knarly Rear.



	SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
MX	20X6.00-10	4PR	35J	TL 6.5 / 160	19.7 / 500	267 / 121	10.0 / 0.70	10X5.0AT	*
MX	AT20X6R10	4PR		TL 6.6 / 169	19.3 / 490	160 / 73	5.0 / 0.35	10X5.5AT	
XC	AT21X7-10	4PR	25N / 25F	TL 6.5 / 165	20.2 / 514	205 / 93	5.0 / 0.35	10X5.5AT	*
XC	AT21X7-10	6PR	30N	TL 6.54 / 166	20.5 / 520	235 / 106	7.0 / 0.50	10X5.5AT	*
XC	AT21X7R10	4PR	25J	TL 6.9 / 174	20.5 / 520	205 / 93	5.0 / 0.35	10X5.5AT	*
XC	AT22X7-10	4PR	28N / 28F	TL 7.0 / 177	21.8 / 554	220 / 100	5.0 / 0.35	10X5.5AT	*
XC	AT22X7-10	6PR		TL 6.8 / 172	21.7 / 552	255 / 115	7.0 / 0.50	10X5.5AT	
XC	AT23X7-10	4PR	31F	TL 7.0 / 177	22.4 / 570	240 / 109	5.0 / 0.35	10X5.5AT	*
XC	AT23X8R12	6PR	37N	TL 7.9 / 200	23.1 / 586	280 / 128	7.0 / 0.50	12X6.5AT	*
XC	AT25X8-12	4PR	38F	TL 8.0 / 202	24.8 / 630	290 / 132	5.0 / 0.35	12X6.5AT	*
XC	AT25X8-12	6PR		TL 8.0 / 202	24.8 / 630	340 / 155	7.0 / 0.50	12X6.5AT	



K532FA KLAW

- Meets the demands of the motocross track and cross country terrain.
- Dual rotation tread design; soft to medium terrain, medium to hard terrain.
- Matches with the Klaw or Knarly Rear.
- New tread profile to improve front tire tracking in rutted terrain.



	SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
XC	AT21X7-10	6PR		TL 6.9 / 176	21.1 / 536	235 / 106	7.0 / 0.50	10X5.5AT	
XC	AT22X7-10	6PR	33N	TL 6.7 / 169	22.2 / 563	255 / 115	7.0 / 0.50	10X5.5AT	*
XC	AT23X7-10	6PR	36N	TL 7.2 / 183	23.0 / 584	275 / 125	7.0 / 0.5	10X5.5AT	*



K533 KLAW

- Light weight racing casing and high grip compound.
- Performs for a mix of terrains ranging from cross country and motocross, to short course racing.
- Dual rotation tread design; soft to medium terrain, medium to hard terrain.



	SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
MX	AT18X10.5-8	4PR	29F	TL 10.2 / 260	18.2 / 462	225 / 103	5.0 / 0.35	8X8.5AT	*
MX	AT18X10.5R8	4PR		TL 10.4 / 262	18.2 / 463	225 / 103	5.0 / 0.35	8X8.5AT	
XC	AT20X11-8	6PR		TL 11.4 / 290	20.7 / 526	340 / 155	7.0 / 0.50	8X9.0AT	
XC	AT21X10-8	4PR	37N	TL 11.0 / 280	20.9 / 532	280 / 128	5.0 / 0.35	8X8.0AT	*
XC	AT22X11-8	6PR		TL 11.5 / 292	22.6 / 575	395 / 180	7.0 / 0.50	8X9.0AT	
MX	AT18X10.5-9	4PR	32F	TL 10.4 / 264	18.0 / 458	245 / 112	5.0 / 0.35	9X9.0AT	*
MX	AT18X10.5R9	4PR		TL 10.4 / 262	18.3 / 463	245 / 112	5.0 / 0.35	9X9.0AT	
XC	AT20X11-9	4PR	38F	TL 10.6 / 270	20.6 / 524	290 / 132	5.0 / 0.35	9X9.0AT	*
XC	AT20X11-9	6PR	43N / 43F	TL 10.6 / 270	20.6 / 524	340 / 155	7.0 / 0.50	9X9.0AT	*
XC	AT20X11R9	6PR	43J	TL 10.8 / 275	20.3 / 516	304 / 155	7.0 / 0.50	9X9.0AT	*
XC	AT22X11-9	6PR		TL 11.1 / 283	22.6 / 574	395 / 180	7.0 / 0.50	9X9.0AT	
XC	AT20X11-10	4PR	37N	TL 10.9 / 278	20.8 / 528	280 / 128	5.0 / 0.35	10X9.0AT	*
XC	AT20X11-10	6PR		TL 10.2 / 265	20.8 / 528	330 / 150	7.0 / 0.50	10X9.0AT	
XC	AT22X11-10	4PR	42F	TL 11.2 / 285	22.8 / 578	330 / 150	5.0 / 0.35	10X9.0AT	*
XC	AT22X11-10	6PR	47F	TL 10.9 / 278	22.8 / 578	385 / 175	7.0 / 0.50	10X9.0AT	*
XC	AT23X10R12	6PR	45N	TL 10.0 / 253	23.3 / 592	365 / 165	7.0 / 0.50	12X8.0AT	*
XC	AT25X10-12	6PR		TL 9.9 / 252	25.2 / 640	420 / 190	7.0 / 0.50	12X8.0AT	

MX=MOTOCROSS
XC=X-COUNTRY



K535A KNARLY XC

- Tread pattern designed specifically for GNCC style riding.
- Large, durable knobs to handle the toughest terrain, rock, roots, etc.
- Extra tough casing to resist punctures.
- GNCC race proven winner.



	SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGf / CM ²	RIM (INCH)	E MARK
	AT20X11-9	6PR		TL 10.6 / 268	20.0 / 508	340 / 155	7.0 / 0.50	9X9.0AT	
	AT21X11-9	6PR		TL 10.6 / 270	21.0 / 533	355 / 160	7.0 / 0.50	9X9.0AT	
	AT22X10-9	4PR	39N	TL 10.1 / 257	21.9 / 556	300 / 136	5.0 / 0.35	9X8.0AT	*
	AT22X11-9	6PR		TL 11.3 / 288	22.2 / 565	395 / 180	7.0 / 0.50	9X9.0AT	

K546F / K547 SPEEDRACER ON ROAD

- Excellent design for dual sport riding.
- Deep lugs for self-cleaning in all conditions.

KENDA
SPEED RACER



FRONT

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT19X7-8 (175/75-8)	4PR	20N	TL 7.2 / 182	19.2 / 487	175 / 80	5.0 / 0.35	8X5.5AT	*
AT20X7-8 (175/85-8)	4PR	23N	TL 7.4 / 188	19.6 / 498	195 / 87.5	5.0 / 0.35	8X5.5AT	*
18.5X6.0-10 (165/70-10)	4PR	27N	TL 7.2 / 183	19.8 / 502	215 / 97.5	25.0 / 1.80	10X5.0AT	*
AT21X7-10 (175/75-10)	4PR	25N	TL 7.0 / 177	21.0 / 533	205 / 92.5	5.0 / 0.35	10X5.5AT	*
AT25X8-12 (205/80-12)	6PR	43N	TL 8.1 / 207	24.8 / 629	340 / 155	7.0 / 0.50	12X6.5AT	*



REAR

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT18X9.5-8 (225/55-8)	4PR	30N	TL 9.4 / 238	18.0 / 458	233 / 106	5.0 / 0.35	8X7.0AT	*
AT19X8-8 (205/65-8)	4PR	24N	TL 8.5 / 215	19.1 / 486	200 / 90	5.0 / 0.35	8X7.0AT	*
AT21X10-8 (245/65-8)	4PR	37N	TL 10.5 / 266	21.2 / 538	280 / 128	5.0 / 0.35	8X8.0AT	*
AT22X10-8 (255/70-8)	4PR	39N	TL 10.4 / 263	22.1 / 562	300 / 136	5.0 / 0.35	8X8.0AT	*
AT20X11-9 (255/55-9)	4PR	38N	TL 11.1 / 282	20.6 / 524	290 / 132	5.0 / 0.35	9X9.0AT	*
18X10.0-10 (225/40-10)	6PR	34N	TL 9.7 / 246	19.0 / 482	260 / 118	25.0 / 1.80	10X8.0AT	*
AT22X10-10 (255/60-10)	4PR	55N	TL 10.0 / 254	22.0 / 558	480 / 218	5.0 / 0.35	10X8.0AT	*
AT25X10-12 (255/65-12)	6PR	50N	TL 9.2 / 234	24.9 / 633	420 / 190	7.0 / 0.50	12X8.0AT	*
AT27X10-12 (255/75-12)	6PR	54N	TL 10.2 / 260	27.2 / 690	465 / 212	7.0 / 0.50	12X8.0AT	*



K572 ROAD GO

- Designed for ATVs with a focus on smooth terrain including gravel, dirt or paved roads.
- Close tread pattern to reduce noise level and provide a smooth ride.
- Low rolling resistance.



KENDA

SIZE	SPEED/LOAD RATING		WIDTH (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY (LBS/KGS)	MAX. PSI / KGF / CM ²	RIM (INCH)	E MARK
AT18X9.5-8 (225/55-8)	4PR	30N	TL 9.2 / 233	17.8 / 453	235 / 106	5.0 / 0.35	8X7.0AT	*
AT19X7-8 (205/65-8)	4PR	20N	TL 7.1 / 180	18.6 / 473	175 / 80	5.0 / 0.35	8X5.5AT	*
AT21X10-8 (245/65-8)	4PR	37N	TL 9.8 / 250	20.5 / 520	280 / 128	5.0 / 0.35	8X8.0AT	*
AT20X11-9 (255/55-9)	4PR	38N	TL 10.5 / 267	20.0 / 509	290 / 132	5.0 / 0.35	10X9.0AT	*
AT21X7-10 (175/75-10)	4PR	25N	TL 6.8 / 172	20.8 / 528	205 / 92.5	5.0 / 0.35	10X5.5AT	*
AT21X7-10 (175/75-10)	6PR	40N	TL 7.1 / 180	20.2 / 514	308 / 140	7.0 / 0.50	10X5.5AT	*
AT22X10-10 (255/60-10)	4PR	55N	TL 9.8 / 248	21.7 / 550	480 / 218	5.0 / 0.35	10X8.0AT	*
22X10.00-10	6PR	66F	TL 9.5 / 241	22.2 / 565	660 / 300	18.0 / 1.30	10X8.0AT	
AT25X8-12 (205/80-12)	4PR	38N	TL 8.0 / 205	24.6 / 625	290 / 132	5.0 / 0.35	12X6.5AT	*
AT25X10-12 (255/65-12)	4PR	45N	TL 9.8 / 248	25.0 / 637	365 / 165	5.0 / 0.35	12X8.0AT	*

VALVE FOR TUFF / SUPER TUFF TUBE : TR-4 / TR-6 ONLY * = RUBBER THICKNESS (AVERAGE FIGURE)

TUBES

INNER TUBE - AVAILABLE SIZE	STANDARD VALVE			STANDARD * 1.2 - 1.3 MM	AVAILABLE TYPE TUFF(INCH/MM) * 2.3 - 2.4 MM	SUPER TUFF * 3.6 - 3.7 MM
3.00-8	TR-6	TR-13	JS-87C	★		
3.50-8	TR-6	TR-13	JS-87C	★		
2.75-9	TR-6		JS-87C	★		
2.50/2.75-10	TR-4		JS-87C	★	★	
2.75/3.00-10	TR-4		JS-87C	★		
3.00/3.25-10 (90/100-10)	TR-4	TR-13	JS-87C	★		
3.50/4.00-10	TR-6	TR-13	JS-87C	★		
2.50-12	TR-4			★	★	
120/130/70-12	TR-6		JS-87C	★		
2.75/3.00-12	TR-4		JS-87C	★		
3.00/3.25-12 (80/100-12)	TR-4			★	★	
3.25/3.50-12	TR-4			★		
4.00-12	TR-4	TR-13		★		
130/60-13	TR-6		JS-87C	★		
2.00/2.25/2.50-14	TR-4			★		
2.25/2.50-14 (60/100-14)	TR-4			★	★	
2.50/2.75-14	TR-4			★		
2.75/3.00-14	TR-4			★		
3.00/3.25-14	TR-4			★		
3.25/3.50-14	TR-4			★		
3.60/4.10-14 (90/100-14)	TR-6			★	★	
4.50-14		TR-13		★		
180/80-14	TR-4			★		
2.25/2.50-15	TR-4			★		
2.75/3.00-15	TR-4			★		
3.00/3.25-15 (90/90-15)	TR-4			★	★	
2.00/2.25-16	TR-4			★		
2.25/2.50-16	TR-4			★		
2.50/2.75-16	TR-4			★		
2.75/3.00-16	TR-4			★		
3.00/3.25-16	TR-4			★		
3.50-16	TR-6			★		
90/100-16	TR-4				★	
4.25/4.50-16	TR-6			★		
2.00/2.25-17	TR-4			★		
2.25/2.50-17 (70/100-17)	TR-4			★	★	
90/80-17, 2.50/2.75-17	TR-4			★		
100/80-17, 2.75/3.00-17	TR-4			★		
3.00/3.25-17	TR-4			★		
100/90-17, 110/90-17, 120/80-17, 3.25/3.50-17	TR-4			★		
100/90-17, 110/90-17	TR-6				★	
110/100-17(4.00-17)	TR-6				★	
130/90-17 (4.50/5.00-17)	TR-6				★	
3.75/4.25-17	TR-6			★		
120/90-17, 130/70-17, 130/80-17, 140/70-17, 4.50/5.10-17	TR-6			★		
2.25/2.50-18	TR-4			★		
2.50/2.75-18	TR-4			★		
80/90-18, 90/90-18, 2.50/2.75/3.00-18	TR-4			★		
3.00/3.25-18	TR-4			★		
110/80-18, 100/90-18, 110/90-18, 120/80-18, 3.25/3.50-18	TR-4			★		
3.50/4.00-18	TR-6			★		
3.75/4.25-18	TR-6			★		
3.75-18 (100/100-18)	TR-6				★	
100/90-18, 110/80-18, 110/90-18, 120/80-18, 120/90-18, 130/70-18, 130/90-18, 150/70-18, 4.00/4.50-18	TR-6			★		
4.50/5.10-18 (110/100-18, 120/100-18)	TR-6			★		
110/100-18	TR-6				★	★
120/100-18	TR-6				★	★
4.30/5.10-18	TR-6			★		
2.00/2.25-19	TR-4			★		
2.25/2.50-19 (70/100-19)	TR-4			★	★	★
2.50/2.75-19	TR-4			★		
2.75/3.00-19	TR-4			★		
120/60-19, 3.00/3.25-19	TR-4			★		
90/90-19, 110/90-19, 110/80-19, 3.25/3.50-19	TR-4			★		
3.50/4.00-19 (100/90-19)	TR-6			★		
100/90-19	TR-6				★	
100/90-19, 110/90-19, 120/90-19, 120/80-19, 4.00/4.50-19	TR-6			★		
4.50/5.10-19 (110/90-19, 120/90-19)	TR-6			★	★	
110/90-19	TR-6					★
2.75/3.00-21	TR-4			★		
80/90-21, 90/90-21, 80/100-21, 90/100-21, 3.00/3.25-21	TR-4			★		
80/90-21, 90/90-21, 80/100-21, 90/100-21	TR-6				★	
80/100-21	TR-6					★
3.25/3.50-21	TR-4			★		
2.75/3.00-23	TR-4			★		
3.00/3.25-23	TR-4			★		
ATV INNER TUBE - AVAILABLE SIZE	STANDARD VALVE		ATV INNER TUBE - AVAILABLE SIZE	STANDARD VALVE		
16X8.00-7	TR-6	TR-13	25X12.00/13.00-9	TR-6		
16X6.50/7.60-8	TR-6	TR-13	21X7.00-10	TR-6		
18X7.00-8	TR-6	TR-13	20.5X8.00-10	TR-6	TR-13	
18X8.50/9.50-8	TR-6	TR-13	22X8.00-10	TR-6	TR-13	
20X7.00-8	TR-6	TR-13	22X11.00-10	TR-6	TR-13	
20X8.00-8	TR-6	TR-13	23.5X8.00-11	TR-6	TR-13	
20X10.00-8	TR-6	TR-13	24X9.00-11	TR-6	TR-13	
22X11.00-8	TR-6	TR-13	23X8.50/10.50-12	TR-6	TR-13	
22X11.00-9	TR-6		26X12.00-12	TR-6	TR-13	



TR-4



TR-6



TR-13



TR-15



PV 78



JS-87C

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P29	K77	2-1/2-16		•		•	
		2-1/4-16		•		•	
		2-17				•	
		2-1/4-17				•	
P52	K201	2.25-17	•	•	•	•	•
P52	K202	2.50-17	•	•	•	•	•
P52	K203	2.50-18	•	•	•	•	•
P52	K204	3.00-16	•				
		2.75-17	•	•	•	•	
		3.00-19				•	
P53	K205	2.75-18	•	•	•	•	•
P53	K208	2.25-17				•	•
		2.50-17				•	•
		2.50-18		•		•	•
		2.75-18		•	•	•	
P51 P53	K252	2.25-16		•			
		2.50-17	•	•	•	•	
		2.25-19		•			
P53	K254	2.50-19		•		•	
P54	K255	2.75-17		•	•	•	
		2.75-18	•			•	•
		3.00-16	•	•	•	•	
		3.25-16	•	•		•	•
		3.00-17	•	•		•	•
P16	K257D	2.75-18	•	•		•	
		3.60-14	•				
		4.10-14	•				
		3.00-16	•				
		4.10-17				•	•
		4.60-17	•	•			
		5.10-17	•				
		3.00-18		•		•	•
		3.50-18	•				
		4.10-18	•				
		4.25-18	•				
		4.50-18	•				
		4.60-18	•				
		5.10-18	•				
		5.30-18	•				
P29	K261A	100/90-19		•			
P15 P72	K262	110/90-19	•				
		3.00-21	•				
		2-1/4-14	•			•	•
		2-1/4-17					
		2.75-14		•	•	•	
		3.00-14		•		•	•
		110/90-16				•	•
		2.50-16				•	
		2.75-16	•				
		3.00-16	•			•	
		120/80-17		•			
		2.50-17		•		•	•
		2.75-17	•	•	•	•	•
		3.00-17	•	•		•	•
		3.25-17	•			•	
		100/90-18		•			
		2.50-18		•		•	•
		2.75-18	•	•	•	•	
3.00-18	•	•	•	•	•		
3.25-18	•	•	•	•	•		
3.50-18	•	•	•	•			
4.00-18	•						
2.25-19		•					
2.75-19	•	•		•			
2.75-21	•						
3.00-21	•						
P51 P54	K265	2.75-17	•	•		•	•
		3.25-17		•			
		3.00-18	•	•	•		
		3.25-18		•		•	
		3.50-18	•	•		•	
		90/90-18		•	•	•	
		3.00-19				•	
		3.50-19				•	
		70/90-17				•	•
		80/90-17				•	•

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P10	K270	180/80-14	•				
		2.50-17					•
		2.75-17					•
		3.25-17	•				
		3.50-17	•				
		4.60-17	•			•	•
		5.10-17	•				
		100/90-18	•				
		120/80-18	•				
		2.75-18	•			•	•
		3.00-18				•	
		3.50-18	•	•		•	
		4.00-18	•			•	•
		4.10-18	•	•	•	•	•
		4.50-18	•				
		4.60-18	•				
		5.10-18	•				
P54	K270A	130/80-18	•				
		2.75-19	•			•	
		90/90-19				•	•
		2.50-21				•	
		2.75-21	•	•	•	•	•
		3.00-21	•				
		3.25-21	•				
		90/90-21	•				
		3.00-14	•	•		•	•
		110/90-16				•	•
		3.50-16		•		•	
		2.25-17				•	•
		2.50-17		•		•	•
		2.75-17		•		•	
		3.00-17		•		•	•
		2.75-18		•		•	•
		3.00-18		•		•	
P55	K270B	110/90-16		•	•	•	
		2.50-17		•	•	•	•
		2.75-17		•	•	•	•
		3.00-17		•		•	
		2.75-18		•		•	
		3.00-18		•		•	
		3.25-18		•		•	
90/90-18	•	•	•	•	•		
P55 P72	K272	2.75-14		•	•	•	
		3.00-16	•			•	
		2.75-17	•	•	•	•	•
		3.00-17	•	•	•	•	•
		3.25-17	•			•	
		2.75-18	•	•	•	•	
		3.00-18	•			•	•
3.75-19		•					
P55	K273	3.25-16		•	•	•	
		3.50-16	•	•	•	•	
		2.50-17		•	•	•	•
		3.50-17	•	•	•	•	
		2.50-18		•		•	
P55	K273A	3.00-18	•	•	•	•	•
		2.50-17				•	
P56	K273B	2.50-17		•	•	•	•
		2.75-17		•	•	•	
		2.75-18		•	•	•	
P10	K280	3.00-18		•	•		
		80/90-14					•
		90/90-14					•
		110/90-17					•
		130/80-17	•				
		4.60-17	•				
		3.50-18	•			•	
		4.10-18	•			•	
		4.60-18	•			•	
		120/80-18					•
90/90-19					•		
P56	K285	2.75-21	•			•	
		3.00-21	•			•	
		90/90-21					•
		3.00-18	•	•	•	•	•

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P56	K291F	2.75-18		•		•		
		80/100-18		•		•		
P56	K291	90/90-18	•			•		
		22X12.00-8	•					
	K299	AT22X10-9	•					
		22X12.00-9	•					
		25X12.50-9	•					
		22X8.00-10	•					
		22X12.00-10	•					
		23X7.00-10	•					
		AT23X10-10	•					
		24X11.00-10	•					
		25X12.50-10	•					
		AT22X7-11	•					
		23X8.00-11	•					
		24X9.00-11	•					
		25X8.00-11	•					
P74		K299	25X10.00-11	•				
			25X12.50-11	•				
			21X8.00-12	•				
			AT24X8-12	•				
			24X10.00-12	•				
			25X8.00-12	•				
			25X10.00-12	•				
			26X9.00-12	•				
			AT26X11-12	•				
			26X12.00-12	•				
			AT27X9-12	•				
			27X10.00-12	•				
			AT27X11-12	•				
	27X12.00-12		•					
	AT24X10-11		•					
	AT24X8-12		•					
	AT25X8-12	•						
P75	K299A	AT25X10-12	•					
		AT25X12.5-12	•					
		AT26X10-12	•					
		AT26X12-12	•					
		AT27X9-12	•					
P84	K300F	AT20X7-8	•					
		22X8.00-10	•					
	K300	AT21X7-10	•	•				
		AT19X8-8	•					
		20X11.00-8	•					
		AT21X10-8	•					
		AT22X10-8	•					
P84		K300	22X11.00-8	•				
			20X11.00-9	•				
			22X11.00-9	•				
			20X11.00-10	•				
			AT22X10-10	•				
	AT22X11-10		•	•				
P31	K303A	3.00-10	•	•		•		
		3.50-10	•	•		•		
	K320	110/90-18				•		
P57		K320	2.75-18				•	
			3.00-18				•	
	K324	90/90-18	•			•		
P31		K324	3.00-10	•	•		•	
P57			3.50-10	•		•	•	
		90/90-10	•					
		80/90-18	•					
		100/80-16		•			•	
		110/90-16		•			•	
		120/90-16		•			•	
P57		K328	100/80-17	•	•		•	
			110/80-17	•	•		•	
	120/80-17		•	•		•		
	90/90-17			•			•	
	90/90-18		•	•			•	
	100/80-10		•				•	
P31	K329	100/90-10	•					
P57		K329	120/90-10	•				
			140/90-10	•				
		2.50-10	•		•			
		2.75-10	•					
		3.50-10	•	•	•			
		90/90-10		•			•	
	90/90-17	•				•		

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P50	K333	3.00-10		•		•		
		3.50-10		•		•		
		3.50-16				•		
	K335	110/90-17				•		
P16		K335	2.75-18				•	
			4.00-18	•				
		4.10-18				•		
		4.00-19				•		
		90/90-19				•		
		2.50-14		•	•			
	2.75-14			•				
	K340	110/90-16		•		•	•	
		3.25-16		•				
P58		K340	3.50-16		•		•	
			2.75-17		•	•		
		2.75-18		•		•		
		3.00-18		•	•			
		3.25-18				•		
	90/90-18		•	•	•			
	120/90-10	•	•	•				
	130/90-10	•	•	•				
	K346	3.50-10		•	•			
P32		K346	130/80-15				•	
			130/90-15		•	•	•	
		100/90-16		•	•	•		
		110/90-16		•	•	•		
	100/90-10		•					
	K348	3.00-10		•	•	•		
P32		K348	3.00-10 (14X3.2)		•	•		
			3.50-10	•	•	•	•	•
		90/90-10	•					
		90/100-10		•			•	
		90/90-12	•	•		•		
	3.00-12			•				
	3.50-12			•				
	3.75-12			•				
	4.00-12			•				
	4.50-12			•		•		
	K363	3.00-16				•		
P72		K363	3.25-16		•	•	•	
			2.50-17				•	
		2.75-17				•		
		3.00-17				•		
		3.25-17				•		
	3.00-18				•			
P32	K412F	90/90-12	•	•	•	•		
	K412	3.00-10	•					
P32		K412	80/90-10	•				
			90/90-10	•	•	•		
		100/90-10		•	•			
	K413	3.00-10	•					
		3.50-10	•					
		90/90-10					•	
		100/80-10	•	•			•	
		100/90-10	•				•	
		110/80-10	•	•			•	
		120/90-10	•				•	
		130/70-10	•		•			
P33		K413	130/90-10	•			•	
			110/70-12	•	•			•
			110/80-12					•
			110/90-12	•	•	•		
	120/70-12		•	•			•	
	130/70-12		•	•			•	
	140/70-12		•	•				
	120/70-13	•	•	•				
	130/60-13	•	•	•		•		
	140/60-13	•	•	•		•		
	K415	3.50-10	•			•		
		90/90-10	•					
P33		K415	100/90-10	•				
			120/70-10				•	
		120/90-10	•					
		130/90-10	•	•				
		120/70-11					•	
	120/70-12	•				•		
	130/70-12	•						

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P34 P50 P51 P58	K418	3.00-10	•	•	•	•		
		3.50-10	•	•	•			
		90/90-10	•	•				
		100/90-10	•	•		•		
		110/90-10	•	•				
		120/70-10	•	•		•		
		120/80-10	•					
		130/70-10	•					
		110/70-12		•				
		120/70-12	•	•				
		130/70-12	•	•	•			
		4.00-12		•				
		110/90-16	•					
		2.50-17				•	•	
		2.75-17			•		•	
3.00-17					•	•		
2.75-18			•		•	•		
3.00-18	•	•			•	•		
3.00-14					•			
2.25-17				•	•			
2.50-17			•	•	•			
2.75-17	•	•	•	•	•			
3.00-17			•		•	•		
100/90-17			•		•			
2.25-17					•	•		
2.50-17					•	•		
2.75-17					•			
100/80-10			•		•			
120/70-10			•		•			
110/70-11					•			
120/70-11					•			
110/70-12					•			
80/80-14	•							
110/80-14			•					
70/90-16			•					
80/80-16			•					
80/90-16			•					
90/80-16			•					
100/80-16			•					
120/80-16				•	•			
90/90-18				•	•			
100/90-18			•		•			
80/100-18					•			
90/90-18			•		•			
130/90-16			•					
90/90-18			•		•			
100/80-16					•			
110/80-16					•			
120/80-16			•		•			
110/80-17			•		•			
90/90-17					•			
90/90-18					•			
3.50-10			•					
90/90-10			•					
100/80-10			•					
100/90-10			•					
130/70-10			•					
100/60-12				•				
110/70-12	•							
110/80-12	•							
120/70-12			•		•			
130/70-12	•		•					
80/90-14	•		•		•	•		
90/90-14			•					
100/80-14	•		•					
120/70-14	•		•		•			
120/80-14	•		•		•			
120/70-15	•		•					
120/70-16	•							
130/70-12			•		•			
140/70-13				•				
150/70-13	•							
90/90-14	•		•		•	•		
100/80-14			•					
100/90-14	•		•		•			
120/70-14	•							
150/70-14	•							
140/70-15	•							
90/90-16			•		•			

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P35	K438	3.50-10	•	•			
		90/90-10	•				
		100/90-10	•			•	
P60	K482F	2.25-17				•	
		60/100-17				•	
		2.50-17		•		•	•
P60	K482	2.50-17				•	
		2.75-17		•		•	•
P61	K485	110/90-16		•		•	
		70/90-14		•		•	•
	K488	80/80-14					•
		80/90-14		•		•	•
		90/90-14				•	•
		100/70-14				•	•
		70/90-16				•	•
		80/80-16		•			
		80/90-16				•	•
		90/80-16		•			
		80/90-17	•			•	•
		90/90-17					•
	70/90-18	•					
P61	K488B	70/80-17				•	
		80/80-17				•	•
		90/80-17				•	•
P61	K488D	70/90-17				•	•
	K489	3.50-16		•	•	•	
		2.75-18			•		
		3.00-18		•	•		
		3.25-18		•			
		90/90-18		•			
	K492	70/90-17				•	•
		80/90-17				•	•
		90/80-17	•				•
		100/80-17	•				
		80/90-18	•				
		90/90-18	•				
	K530F	16X8.00-7	•				
		18X7.00-7	•				
		19X7.00-8	•	•			
		AT21X7-10	•	•			
		AT22X7-10	•	•			
		23X8.00-11	•				
		AT23X8-12	•				
		AT24X8-12	•				
		25X8.00-12	•	•			
		18X9.50-8	•	•			
	K530	22X11.00-8	•				
		22X11.00-9	•				
		25X12.00-9	•				
		AT22X9-10	•				
		22X11.00-10	•	•			
		25X12.00-10	•				
		24X9.00-11	•				
		AT23X10-12	•				
		AT24X10-12	•				
		25X10.00-12	•	•			
	K532F	AT20X6-10	•				
		AT21X7-10	•	•			
		AT22X7-10	•				
		AT23X7-10	•				
		AT23X8R12	•				
	K532FA	AT25X8-12	•				
		AT21X7-10	•				
		AT22X7-10	•				
		AT23X7-10	•				
	K533	AT20X11-8	•				
		AT21X10-8	•				
		AT22X11-8	•				
		AT20X11-9	•	•			
		AT22X11-9	•				
		AT20X11-10	•				
		AT22X11-10	•				
		AT23X10R12	•				
	K533MX	AT25X10-12	•				
		AT18X10.5-8	•				
		AT18X10.5-9	•				
	K535A	AT20X11-9	•				
		AT21X11-9	•				
		AT22X10-9	•				
		AT22X11-9	•				

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P76	K537	AT25X8R12	•				
		AT25X10R12	•				
		26X10.00R12	•				
		26X12.00R12	•				
		27X10.00R12	•				
		27X12.00R12	•				
		AT26X10R14	•				
AT26X12R14	•						
P76	K538	AT25X8-12	•				
		AT25X10-12	•				
		AT26X10-12	•				
		AT26X12-12	•				
		AT27X10-12	•				
		AT27X12-12	•				
		AT28X9-14	•				
AT28X11-14	•						
P86	K546F	AT19X7-8	•	•			
		AT20X7-8	•				
		165/70-10	•				
		AT21X7-10	•				
		24X8.00-12	•	•			
		AT25X8-12	•	•			
		AT18X9.5-8	•				
P86	K547	AT19X8-8	•				
		AT21X10-8	•				
		AT22X10-8	•				
		AT20X11-9	•				
		225/40-10	•				
		AT22X10-10	•				
		AT25X10-12	•	•			
AT27X10-12	•						
P86	K572	AT18X9.5-8	•	•			
		AT19X7-8	•	•			
		AT21X10-8	•				
		AT20X11-9	•				
		AT21X7-10	•				
		AT22X10-10	•				
		AT25X8-12	•				
AT25X10-12	•						
P76	K573F	AT21X7-10	•				
		AT22X7-10	•				
		AT22X8-10	•				
		AT23X8-10	•				
		AT23X8-11	•				
		AT24X8-11	•				
		AT24X9-11	•				
P76	K573	AT25X8-12	•				
		AT26X10-12	•				
		AT27X10-12	•				
		AT22X11-8	•				
		AT22X11-9	•				
		AT25X12-9	•				
		AT22X11-10	•				
AT23X10-10	•						
AT24X11-10	•						
AT25X11-10	•						
AT24X10-11	•						
AT25X10-11	•						
AT25X10-12	•						
AT26X12-12	•						
AT27X12-12	•						
P77	K585	25X8.00R12	•	•			
		25X10.00R12	•	•			
		26X9.00R12	•				
		26X11.00R12	•				
		27X9.00R12	•				
		27X11.00R12	•				
		26X9.00R14	•	•			
26X11.00R14	•	•					
P77	K587	AT25X8R12	•				
		AT25X10R12	•				
		AT26X9R12	•				
		AT26X11R12	•				
		AT27X9R12	•				
		AT27X11R12	•				
		AT26X9R14	•				
AT26X11R14	•						
AT27X9.5R14	•						
AT28X9R14	•						
AT28X11R14	•						

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P78	K590	25X8.00-12	•					
		AT25X10-12	•					
		25X11.00-12	•					
		AT26X9-14	•					
P71	K635A	AT26X11-14	•					
		4.00-12			•			
P4 P29	K657F	2.50-16	•					
		2-3/4-16	•					
		2-1/2-17	•				•	
		2-3/4-17	•				•	
		130/90-16	•					
		100/90-18	•					
		100/90-19	•					
P4	K657	110/90-19	•					
		90/100-21	•					
		130/90-15	•					
		140/90-15	•					
		120/90-16	•					
		130/90-16	•					
		140/90-16	•					
		150/80-16	•					
		130/90-17	•					
		110/90-18	•					
		120/90-18	•					
P67	K665F	130/70-18	•					
		130/90-18	•					
		70/90-14				•	•	
		70/90-17				•	•	
P67	K665	80/90-14				•	•	
		80/90-17				•	•	
		100/70-17				•		
P67	K666	100/90-18				•		
		2.50-17				•		
		2.75-17				•		
P68	K668	3.00-18				•		
		3.25-16				•		
		3.50-16				•		
		2.50-17				•		
		2.75-17				•		
		2.75-18				•		
		3.00-18				•		
P68	K669	110/90-17				•		
		3.00-18		•		•		
		90/90-19				•		
P4	K671F	100/90-16	•					
		110/70-16	•					
		110/70-17	•				•	
		110/80-17	•					
		90/90-18	•					
		100/90-19	•		•			
		130/90-15	•		•			
P4	K671	170/80-15	•					
		130/70-16	•				•	
		130/90-16	•					
		140/70-16	•					•
		130/70-17	•		•			•
		140/60-17	•		•			•
		140/70-17	•		•			
		150/70-17	•		•		•	
		160/60-17	•		•			
		130/70-18	•		•			
		140/70-18	•					
P5	K673F	130/90-16	•				•	
		150/80-16	•					
		120/90-17	•					
		140/80-17	•					
		110/90-18	•					
		120/90-18	•					
		130/70-18	•					
P5	K673	100/90-19	•					
		110/90-19	•					
		80/90-21	•					
		140/90-15	•					
		150/90-15	•					
		170/80-15	•					
		130/90-16	•					
140/90-16	•							
150/80-16	•							
160/80-16	•							

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P6	K674F	100/80-17		•	•	•	•	
		110/70-17	•	•		•		
P6	K674	90/90VB19	•					
		130/70-17	•			•	•	
P7	K676F	140/70-17	•		•	•	•	
		110/80VB18	•					
		120/80VB16	•					
		110/70VB17	•					
		110/80VB17	•					
P7	K676	100/90VB18	•					
		110/90VB18	•					
		100/90VB19	•					
		130/90VB16	•					
		150/80VB16	•					
		130/70VB17	•					
		140/80VB17	•					
		150/70VB17	•					
P68	K677F	120/90VB18	•					
		130/80VB18	•					
		80/80-14					•	
		2.50-17					•	
P68	K677	60/100-17				•	•	
		80/100-18				•	•	
		100/90-19		•				
		80/100-14				•	•	
		90/80-14					•	
		110/80-14					•	
		2.75-17					•	
		2.50-18					•	•
		90/90-18					•	•
		100/80-18					•	•
		100/90-18					•	•
		130/80-18			•			•
P69	K680A	120/90-15			•			
P69	K682F	70/90-17				•		
P69	K682	80/90-17				•		
		90/80-17				•		
P42	K700	3.50-10			•	•		
		90/90-10	•					
		90/100-10				•		
		100/90-10	•			•		
		90/90-12				•		
		110/70-12	•					
		120/70-12	•					
		130/70-12	•					
		3.50-10	•			•		
		P42	K700A	90/90-10	•			
100/90-10	•							
P47 P50	K701	3.00-10	•					
		3.50-10	•					
		100/80-10	•					
		100/90-10	•					
		120/70-10	•					
		120/90-10	•					
		130/90-10	•					
		110/70-11					•	
		120/70-11					•	
		90/90-12			•			
		110/70-12	•					
		120/70-12	•		•			
		130/70-12	•		•			
		130/60-13	•					
		140/60-13					•	
		150/70-13	•					
		120/70-14	•					
		120/80-14	•					
		140/70-14	•					
		100/80-16	•					
		110/70-16	•					
		120/80-16	•					
		100/80-17	•					
110/70-17	•							
130/70-17	•							

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P42	K702F	100/90-12	•	•				
P42	K702	3.50-10	•	•		•		
		90/90-10	•	•				
		100/90-10	•	•			•	
		90/90-12		•	•		•	
		110/70-12	•	•				
		120/70-12	•	•				
		120/80-12	•	•				
P43	K705	130/70-12	•	•				
		3.50-10		•	•	•		
P8 P43	K711F	100/90-10				•		
		110/70-12	•	•				
		120/70-12	•					
		120/70-13	•					
		130/60-13	•					
		100/80-14	•					
		120/80-14	•		•			
		120/70-15			•			
		100/80-17			•			•
		110/70-17			•			•
		110/80-17			•			•
		120/70-17			•			
		P8 P43	K711	3.00-10	•			
3.50-10	•							
90/90-10	•							
100/80-10	•							
100/90-10	•							
120/70-10	•							
110/80-12					•			
120/70-12	•				•			
130/70-12	•							
140/70-12	•							
130/60-13					•			
130/70-13	•							
140/60-13	•							
150/70-13	•				•			
120/70-14	•							
140/60-14					•			
P11	K760F			120/80-17				•
		130/70-17			•	•		
		140/60-17			•			
		140/70-17			•	•	•	
		150/60-17			•			
		150/70-17			•			
		160/60-17			•			
		60/100-16	•					
		2.50-10	•					
		80/100-12	•					
P11	K760	60/100-14	•					
		90/100-14	•					
		90/100-16	•		•			
		130/90-17	•					
		70/100-17	•					
		100/100-18	•					
		110/100-18	•					•
		120/100-18	•					
		140/80-18	•					
		100/90-19	•					
		110/90-19	•					
		120/90-19	•					
70/100-19	•		•					
80/100-21	•			•		•		
90/90-21	•							

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P12 P45	K761	110/80-10		•				
		110/90-10	•	•	•			
		120/90-10	•	•				
		130/90-10	•	•				
		150/80-10	•					
		110/70-12	•			•	•	
		110/90-12	•	•			•	
		120/70-12	•	•		•	•	
		120/80-12	•				•	
		130/70-12	•	•		•	•	
		130/80-12	•				•	
		140/70-12	•					
		130/60-13	•	•	•	•		
		130/70-13					•	
		140/60-13	•					
		180/80-14	•					
		80/100-14					•	
		100/90-16	•					
		2.50-17				•	•	•
		2.75-17				•	•	•
		3.00-17					•	•
		90/90-17			•		•	
		100/80-17						•
		100/90-17						•
		110/80-17			•		•	•
		110/90-17			•		•	•
		120/70-17						•
		120/80-17			•	•	•	•
		120/90-17	•					
		130/70-17						•
		130/80-17	•					
		2.75-18					•	•
		3.00-18					•	•
		4.10-18					•	•
		90/90-18					•	•
		110/80-18	•	•				
		120/80-18	•				•	•
		130/80-18	•					
		90/90-19			•		•	•
		100/90-19	•					
		2.75-21					•	•
		90/90-21	•	•				
		P9	K761FA	130/90-16	•			
		P9	K761K	130/90-16	•			
		P44	K763F	150/80-16	•			
120/70-12	•				•			
110/90-13	•			•		•		
P44	K763	120/70-14	•					
		100/80-16	•		•			
		130/70-12	•					
		130/70-13	•					
		120/80-14		•				
		140/60-14	•					
		110/70-16	•	•				
120/80-16	•			•				
130/80-16	•							
P44 P70	K764F	110/70-12	•			•		
		120/70-12	•			•		
		120/70-14	•					
		2.75-17		•		•		
2.75-18	•			•				
P44 P70	K764	120/90-10	•					
		130/90-10	•					
		110/80-12	•					
		130/70-12	•			•		
		140/70-12	•					
		130/60-13	•	•	•	•		
		140/60-13	•					
		140/60-14	•	•				
		140/70-14	•	•				
		3.25-17	•					
3.50-17	•	•		•				
P27	K774F	80/100-21	•					
P27	K774	90/100-21	•					
		90/100-14	•					
		90/100-16	•					
		110/100-18	•					
		120/100-18	•					
140/80-18	•							
120/90-19	•							

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P21	K775FA	80/100-19	•				
P26 P27	K776F	80/100-21	•				
		90/100-21	•				
		90/90-21	•				
P26 P28	K777F	90/90-21	•	•			
P26 P28	K778	120/90-18	•	•			
		140/80-18	•				
		130/80-19	•				
P26 P27	K779	130/80-18	•			•	
P27		140/80-18	•			•	
P19	K780F	80/100-21	•				
P19	K780	100/100-18	•				
		110/100-18	•				
		100/90-19	•				
		110/90-19	•				
P20	K781F	80/100-21	•				
		90/90-21	•				
		90/100-21	•				
P20	K781	110/100-18	•				
		120/100-18	•				
		100/90-19	•				
		110/80-19	•				
		110/90-19	•				
P20	K782	120/80-19	•				
		100/90-19	•				
P20	K782A	110/90-19	•				
		90/100-16	•				
P14 P45	K784F	110/100-18	•				
		120/70-12	•				
		100/90B19	•				
		110/80B19	•				
		120/70B19	•				
P14 P45	K784	90/90B21	•	•			
		130/70-12	•				
		140/90B16	•				
		130/80B17	•				
		140/80B17	•				
		150/70B17	•				
		170/60B17	•				
		130/80B18	•		•		
		140/80B18	•				
		150/70B18	•				
P21	K785F	2.50-10	•			•	
		60/100-14	•				
		70/100-17	•				
		70/100-19	•				
		80/100-21	•				
		90/100-21	•				
		2.75-10	•				•
P21	K785	80/100-12	•			•	
		90/100-14	•			•	
		90/100-16	•			•	
		90/100-17	•			•	
		110/100-18	•			•	
		120/100-18	•				
		100/90-19	•				
		110/80-19	•				
P21	K786	110/90-19	•				
		120/80-19	•				
		80/100-10	•				
		80/100-12	•				
P21	K787	90/100-14	•				
		90/100-16	•				
		110/100-18	•				
		120/100-18	•				
		100/90-19	•				
		110/80-19	•				
P22	K787	110/90-19	•				
		120/80-19	•				
P30	KD1-F	4.50-18	•				
		100/90-12	•				
		110/70-12	•				
		120/70-12	•				

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA		
P30	KD1	120/70-12	•						
		120/80-12	•						
P2	KR20	130/70-12	•						
		165/55R15				•			
		205/55R15				•			
		225/50R15				•			
		145/60R16				•			
		K205/65R15				•			
		205/45R16				•			
P78 P81	K3201	K215/45R18				•			
		25X8.00R12	•						
		25X10.00R12	•						
		26X9.00R12	•						
		26X11.00R12	•						
		27X9.00R12	•						
		27X11.00R12	•						
		26X9.00R14	•						
		26X11.00R14	•						
		28X9.00R14	•						
		28X10.00R14	•						
		28X11.00R14	•						
		30X10.00R14	•						
		32X10.00R14	•						
		30X10.00R15	•						
		32X10.00R15	•						
		33X10.00R15	•						
		35X10.00R15	•						
		P81	K3203	25X8.00R12	•				
				25X10.00R12	•				
26X9.00R12	•								
26X11.00R12	•								
27X9.00R12	•								
27X11.00R12	•								
26X9.00R14	•								
26X11.00R14	•								
28X9.00R14	•								
28X10.00R14	•								
28X11.00R14	•								
30X10.00R14	•								
32X10.00R14	•								
30X10.00R15	•								
32X10.00R15	•								
P82	K3204R	35X10.00R15	•						
		27X9.00R14	•			•			
		27X11.00R14	•			•			
		28X10.00R14	•			•			
		30X10.00R14	•			•			
		32X10.00R14	•			•			
		30X10.00R15	•			•			
		32X10.00R15	•			•			
		33X10.00R15	•			•			
		35X10.00R15	•			•			
P84	K3210F	37X10.00R15	•			•			
		32X10.00R16	•			•			
		35X10.00R16	•			•			
		AT20X6-10	•						
		AT21X7-10	•						
P84	K3211	23X7.00-10	•						
		AT18X8-8	•						
		AT18X10-8	•						
		AT18X10-9	•						
		AT20X11-9	•						
P80	K3213	22X11.00-9	•						
		UT27X11.00R14	•						
		UT27X9.00R14	•						
		UT28X10.00R14	•						
		UT28X9.00R14	•						
		UT29X11.00R14	•						
		UT29X9.00R14	•						
		UT30X10.00R14	•						
		UT30X9.00R14	•						
		UT32X10.00R14	•						
		30X10.00R15	•						
		30X11.00R15	•						
		UT32X10.00R15	•						
P80	K3214	UT33X10.00R15	•						
		UT35X10.00R15	•						
		UT30X10.00R14	•						
		UT32X10.00R14	•						
		UT32X10.00R15	•						

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P78	K3215	AT25X8-12	•				
P71	K3601	AT25X10-12	•				
		4.00-8				•	
P35	K6005	3.50-10		•	•	•	
		80/100-10		•	•		
P36	K6007F	3.50-12			•		
		110/70-13		•		•	•
		120/70-13	•	•			•
		100/80-14		•			
		110/70-14		•			•
P36	K6007	110/80-14				•	•
		120/70-15	•				
		130/70-13	•	•		•	•
		140/70-13	•	•			•
		100/80-14				•	•
P36 P62	K6010F	120/70-14		•		•	•
		140/70-14	•			•	•
		100/90-10	•				
P36 P62	K6010	80/90-14	•	•		•	
		90/90-10				•	
		70/90-14				•	
		80/80-14				•	
		80/90-14				•	•
		90/80-14				•	
		100/70-14				•	
		100/80-14				•	
		100/90-14				•	•
		110/70-14				•	
		70/90-16				•	
		80/90-16				•	
		60/80-17				•	
		60/90-17				•	
		70/90-17				•	
80/90-17				•			
P37 P63	K6011	90/80-17				•	
		90/80-17				•	
		100/70-17				•	
		110/70-17				•	
		120/70-17				•	
		3.50-10	•				
		90/90-10	•				
		100/90-10	•				
		70/90-14				•	
		80/90-14				•	
90/80-14				•			
P37	K6016	90/90-14				•	
		100/90-14				•	
		70/90-17				•	
		80/90-17				•	
		90/80-17				•	
P37	K6020	100/70-17				•	
		110/70-17				•	
		120/70-17				•	
P37	K6021	120/70-12		•			
		130/70-12		•			
P37	K6021X	3.00-10	•			•	
		3.50-10	•	•	•	•	
		90/100-10				•	
		100/90-10	•				
		90/90-12	•			•	
P38	K6022	3.00-10		•	•		
		3.50-10		•	•		
		90/90-10		•			
		90/90-10		•			
		100/90-10		•			
P38	K6022	90/90-12		•			
		110/70-12		•			
		120/70-12		•			
		130/70-12		•			
		110/70-13		•			
		120/70-13		•			
		130/70-13		•			
		140/70-13		•			
		80/90-14					•
		90/90-14					•
110/80-14					•		

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA
P38	K6028	3.50-10	•				
		90/90-10	•				
		100/90-10	•			•	
		80/90-14					•
		90/90-14					•
P38	K6032F	100/80-14				•	
		100/90-12			•		
P38	K6032	110/90-12			•		
		120/70-13		•		•	
P39	K6033F	110/80-14		•			
		120/70-15		•			
		130/70-13		•			•
P39	K6033	130/70-14		•			
		100/90-12			•		
		110/90-12			•		
P39	K6035	120/70-13	•	•			
		130/70-13	•	•			
		110/80-14		•			
		120/80-14		•			
P40	K6036	130/70-14		•			
		100/80-16		•			
		110/70-12	•				
		120/70-12	•				
P40	K6037	110/70-12	•				
		120/70-12	•				
		110/70-13	•				
		120/70-13	•				
P40	K6038F	120/70-12	•				
		110/70-13	•				
		120/70-13	•				
		120/70-12	•				
P40	K6038	130/70-12	•				
		130/70-13	•				
		80/90-14				•	
P41	K6039	90/90-14				•	
		80/80-14				•	
		90/80-14				•	
P41	K6039A	110/70-17				•	
		130/70-17				•	
		80/80-17				•	
		90/80-17				•	
P63	K6301	2.75-17			•		
		70/90-17			•		
		80/90-17			•		
		2.75-17			•		
P64	K6302F	90/90-17			•		
		2.75-18			•		
		90/90-18			•		
P64	K6302	2.50-17		•	•		
		2.75-17		•	•		
P64	K6303	2.75-14			•	•	
		3.50-16			•		
P12	K6309	110/90-16			•		
		2.50-17			•		
		2.75-17			•		
		80/80-17			•	•	
		90/80-17			•		
		90/90-17			•		
		100/90-17			•		
		110/80-17			•	•	
		110/90-17			•	•	
		120/80-17			•	•	
		120/90-17			•	•	
		130/70-17			•	•	
		130/80-17			•	•	
		150/60-17			•		
		2.75-18			•		
		3.00-18			•		
		80/80-18			•		
		90/90-18			•		
		110/80-18			•		
		120/80-18			•		
P65	K6310	90/90-21			•		
		70/90-17			•		
		80/90-17			•		

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA	
P65	K6313	110/90-16				•		
		120/90-16				•		
		2.50-17				•		
		2.75-17				•		
		3.00-17				•		
		70/90-17					•	•
		80/90-17					•	•
		90/90-17					•	
		100/90-17					•	
		120/80-17					•	
		150/60-17					•	•
		2.75-18					•	
		3.00-18					•	
		4.10-18					•	
		90/90-18					•	
P3	K6318	100/90-18				•		
		120/80-16		•				
		100/80-17		•				
		130/80-17		•				
		2.75-18					•	
P65	K6321	3.00-18				•		
		130/70-18		•				
		90/90-19		•				
		100/90-19		•				
P66	K6324	4.00-17		•				
		4.50-17		•				
P15	K6327F	80/100-18			•			
		110/70-17		•				
		120/70-17		•				
P15	K6327	110/80-19			•			
		140/60-17						
		140/70-17		•				
		150/60-17		•				
P66	K6335F	150/70-17			•			
		60/100-17				•		
		70/100-17					•	
P41	K6338	90/90-10		•	•			
		90/90-12		•				
		110/70-12		•				
		120/70-13		•				
P41	K6339	100/80-14				•		
		120/80-14		•				
		3.00-10				•		
		60/100-10				•		
		100/90-10		•				
P47	K6340	120/70-12		•				
		130/70-12		•				
		150/70-13		•				
P66	K6341	120/70-14				•		
		3.00-19		•				
P14	K6342F	100/90-14		•				
		120/70R17		•				
		100/90B19		•				
		110/80B19		•				
		120/70B19		•				
		90/90B21		•				
		150/80B16		•				
		120/90B17		•				
		130/80B17		•				
		140/80B17		•				
P14	K6342	150/70R17		•				
		170/60R17		•				
		180/55R17		•				
		120/80B18		•				
		120/90B18		•				
		140/80B18		•				
		150/70B18		•				
		3.00-10			•	•		
		60/100-10			•			
		P7	K6702F	130/90B16		•		•
130/80B17				•				
130/70B18				•				
100/90B19				•				
130/60B19				•			•	
P7	K6702F	130/60B21		•				
		80/90-21		•				
		90/90-21		•				

PAGE	PATTERN	SIZE	TAIWAN	SHANGHAI	TIANJIN	VIETNAM	INDONESIA		
P7	K6702	170/80B15	•						
		130/90B16	•						
		140/90B16	•						
		150/80B16	•				•		
		180/65B16	•						
		160/70B17	•						
P8	K6703F	180/55B18	•						
		110/70-17			•				
P8	K6703	120/70-17			•				
		140/70-17			•				
		150/60-17			•				
P48	K7009	160/60-17			•				
		2.75-8		•					
		2.75-10							
		3.00-10 (14X3.2)				•			
		80/90-10			•				
P48 P70	K7025	90/90-12							
		3.00-10			•				
		3.50-10				•			
		3.00-12			•				
P48	K7028	3.50-12			•				
		90/90-18							
		90/90-10					•		
		100/90-12	•						
		110/70-12	•						
P49	K7029	110/70-13	•						
		120/70-12	•						
P49	K7030	90/90-10	•						
		100/90-12	•						
		100/80-14	•						
P49	K7033	100/90-10	•						
		110/70-12	•						
P22	K7101F	110/70-13	•						
		80/100-21		•					
P22	K7101	100/90-18		•					
		110/90-18		•					
		100/90-19		•					
		60/100-10	•						
P23	K7102F	60/100-12	•						
		60/100-14	•						
		90/90-14	•						
		70/100-17	•						
		70/100-19	•						
		80/100-21	•						
		90/100-21	•						
		P23	K7102	80/100-10	•				
				80/100-12	•				
				90/100-12	•				
90/100-14	•								
90/100-16	•								
90/100-18	•								
100/100-18	•								
110/100-18	•								
120/90-18	•								
100/90-19	•								
110/90-19	•								
120/80-19	•								
P23	K7104F	80/100-21	•						
P23	K7105	120/100R18	•						
P24	K7106F	80/100-21		•					
P24	K7106	110/100-18		•					
		110/90-19		•					
P28	K7107F	90/90-21		•					
P28	K7107	120/90-18		•					
		140/80-18		•					
P1	KM001	110/70R17	•						
		120/60ZR17	•						
		120/70ZR17	•						
		140/70R17	•						
		150/60R17	•						
		160/60ZR17	•						
		180/55ZR17	•						
		190/50ZR17	•						
190/55ZR17	•								

TIRE SELECTION

When selecting Kenda tires for your vehicle, be sure they meet the requirements of the intended use. Make sure your tire meets your vehicle's speed requirements and load carrying capacity. Contact Kenda for more information.

FRONT/REAR TIRE MATCHING

Tires designated as front wheel fitment should only be mounted in the front position. Likewise, tires designated for rear wheel fitment should only be mounted in the rear position. Mixing new and used front and rear tires, and vice versa, can cause instability and unpredictable handling. Likewise, mixing radials and non-radials can also cause the same issues. Kenda recommends that you do not mix either of these, as it is unsafe.

TUBES

When fitting a new tire on a wheel/rim requiring a tube, a new tube should be installed at the same time. Old tubes become stretched. If an old tube is fitted within a new tire, it can crease and fail due to thinning of the tube rubber. Kenda does not recommend repairing tubes. Make sure to check the size marking on the tube to be sure it matches your tire size. Do not fit Kenda tubes in radial motorcycle tires. Contact Kenda for more information.

TIRE PRESSURES & TIRE INSPECTION

Always check your tire pressure before each ride and inspect your tires' wear for possible damage before each ride. It is by far the most important function of tire maintenance you can perform. If you add heavier loads or another passenger to your vehicle, a higher tire pressure is required. Never exceed the maximum load indicated on tire sidewall or vehicle capacity load found in the owner's manual. Underinflated tires can result in tire failure. Contact Kenda and consult your owners manual for more information.

SPEED RATINGS

SEE SPEED RATINGS CHART ON THE NEXT PAGE. Speed ratings are recognized by the Industry Standards Organization (ISO). Always match the tire speed rating to your vehicle requirement. Contact Kenda or consult your owners manual for more information.

RUN-IN PERIOD

New tires should not be subjected to maximum power or extreme cornering until the new tire has traveled at least 100 miles. This will allow the rider to get used to the feel of the tires and their performance characteristics. Remember, a new tire has different performance characteristics than a used tire of the same make/model.

TIRE REPAIR AND MODIFICATION

Kenda does not recommend repairing tires. Kenda also does not recommend the use of liquid sealants as a tire repair device. Kenda does not recommend ANY type of tire modification. Instead, faulty tires should be replaced with comparable new tires.

WHEELS AND TIRE BALANCE

It is crucial that tire and wheel assemblies are balanced properly before use. Unbalanced tire and wheel assemblies can potentially lead to tire failure. Bent or cracked wheels/rims should be replaced immediately. Contact your Kenda tire dealer to ensure proper tire and wheel installation and balancing.

LOAD CARRYING CAPACITIES

Make sure your tires have a sufficient load carrying capacity for your vehicle and added weight. When calculating your load capacity, take into account the weight of the vehicle, the weight of any additional luggage or gear, and whether you carry passengers. Proper tire inflation is necessary when making this calculation. Never exceed the vehicle load capacity noted on the VIN plate in your vehicle owner's manual, or the maximum load noted on your tires sidewall.

TIRE INSTALLATION AND MOUNTING

Kenda does not recommend installing your own tires or tubes. Contact your Kenda tire dealer to ensure proper installation and mounting.

TREAD DEPTH

Make sure to replace tires before they reach their tread wear indicator bars (1/32" tread depth remaining). Excessive tread wear can result in tire failure.


CONTACT KENDA FOR MORE DETAILS ABOUT THE ABOVE INFORMATION
NORTH AMERICA: MOTORCYCLE@KENDAUSA.COM
ALL OTHER COUNTRIES: KENDA@KENDA.COM.TW

CORRELATION BETWEEN LOAD INDEX (LI) AND TIRE LOAD-CARRYING CAPACITY (kg)

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	40	140	80	450	120	1 400	160	4 500	200	14 000	240	45 000
1	46.2	41	145	81	462	121	1 450	161	4 625	201	14 500	241	46 250
2	47.5	42	150	82	475	122	1 500	162	4 750	202	15 000	242	47 500
3	48.7	43	155	83	487	123	1 550	163	4 875	203	15 500	243	48 750
4	50	44	160	84	500	124	1 600	164	5 000	204	16 000	244	50 000
5	51.5	45	165	85	515	125	1 650	165	5 150	205	16 500	245	51 500
6	53	46	170	86	530	126	1 700	166	5 300	206	17 000	246	53 000
7	54.5	47	175	87	545	127	1 750	167	5 450	207	17 500	247	54 500
8	56	48	180	88	560	128	1 800	168	5 600	208	18 000	248	56 000
9	58	49	185	89	580	129	1 850	169	5 800	209	18 500	249	58 000
10	60	50	190	90	600	130	1 900	170	6 000	210	19 000	250	60 000
11	61.5	51	195	91	615	131	1 950	171	6 150	211	19 500	251	61 500
12	63	52	200	92	630	132	2 000	172	6 300	212	20 000	252	63 000
13	65	53	206	93	650	133	2 060	173	6 500	213	20 600	253	65 000
14	67	54	212	94	670	134	2 120	174	6 700	214	21 200	254	67 000
15	69	55	218	95	690	135	2 180	175	6 900	215	21 800	255	69 000
16	71	56	224	96	710	136	2 240	176	7 100	216	22 400	256	71 000
17	73	57	230	97	730	137	2 300	177	7 300	217	23 000	257	73 000
18	75	58	236	98	750	138	2 360	178	7 500	218	23 600	258	75 000
19	77.5	59	243	99	775	139	2 430	179	7 750	219	24 300	259	77 500
20	80	60	250	100	800	140	2 500	180	8 000	220	25 000	260	80 000
21	82.5	61	257	101	825	141	2 575	181	8 250	221	25 750	261	82 500
22	85	62	265	102	850	142	2 650	182	8 500	222	26 500	262	85 000
23	87.5	63	272	103	875	143	2 725	183	8 750	223	27 250	263	87 500
24	90	64	280	104	900	144	2 800	184	9 000	224	28 000	264	90 000
25	92.5	65	290	105	925	145	2 900	185	9 250	225	29 000	265	92 500
26	95	66	300	106	950	146	3 000	186	9 500	226	30 000	266	95 000
27	97.5	67	307	107	975	147	3 075	187	9 750	227	30 750	267	97 500
28	100	68	315	108	1 000	148	3 150	188	10 000	228	31 500	268	100 000
29	103	69	325	109	1 030	149	3 250	189	10 300	229	32 500	269	103 000
30	106	70	335	110	1 060	150	3 350	190	10 600	230	33 500	270	106 000
31	109	71	345	111	1 090	151	3 450	191	10 900	231	34 500	271	109 000
32	112	72	355	112	1 120	152	3 550	192	11 200	232	35 500	272	112 000
33	115	73	365	113	1 150	153	3 650	193	11 500	233	36 500	273	115 000
34	118	74	375	114	1 180	154	3 750	194	11 800	234	37 500	274	118 000
35	121	75	387	115	1 215	155	3 875	195	12 150	235	38 750	275	121 500
36	125	76	400	116	1 250	156	4 000	196	12 500	236	40 000	276	125 000
37	128	77	412	117	1 285	157	4 125	197	12 850	237	41 250	277	128 500
38	132	78	425	118	1 320	158	4 250	198	13 200	238	42 500	278	132 000
39	136	79	437	119	1 360	159	4 375	199	13 600	239	43 750	279	136 000

CORRELATION BETWEEN SPEED SYMBOL AND MAXIMUM SPEED

Speed Symbol Code de vitesse Geschwindigkeits-Symbol	Speed Vitesse Geschwindigkeit (km / h)	Speed Symbol Code de vitesse Geschwindigkeits-Symbol	Speed Vitesse Geschwindigkeit (km / h)
A1	5	K	110
A2	10	L	120
A3	15	M	130
A4	20	N	140
A5	25	P	150
A6	30	Q	160
A7	35	R	170
A8	40	S	180
B	50	T	190
C	60	U	200
D	65	H	210
E	70	V	240
F	80	W	270
G	90	Y	300
J	100		

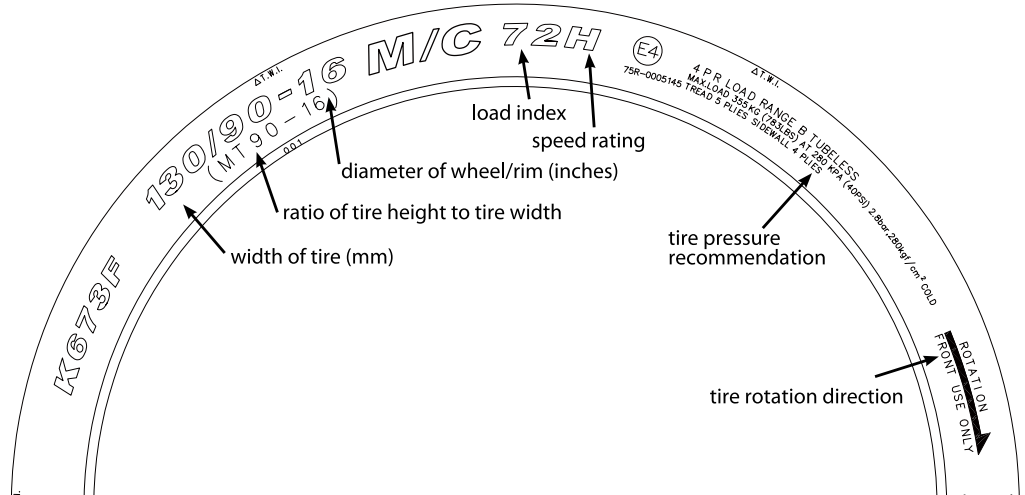

OFFICE LOCATIONS

HEADQUARTERS

KENDA RUBBER IND. CO., LTD.
146, Sec. 1, Chung Shan Road,
Yuan-Lin, Taiwan (510037)
Tel: (886-4)8345171-80
Fax: (886-4)8331865
E-mail: kenda@kenda.com.tw

EUROPE

KENDA RUBBER INDUSTRIAL CO.
EUROPE GMBH
Benzstrasse 21
21423 Winsen/Luhe Germany
Tel: (49-4)171608015

USA

AMERICAN KENDA RUBBER CO., LTD.
7095 Americana Pkwy.
Reynoldsburg. OH 43068. U.S.A.
Tel: (1-614)8669803
Fax: (1-614)8669805

FACTORY LOCATIONS

YUAN-LIN

KENDA RUBBER IND. CO., LTD.
146, Sec. 1, Chung Shan Road,
Yuan-Lin, Taiwan (510037)
Tel: (886-4)8345171-80
Fax: (886-4)8331865

VIETNAM

KENDA RUBBER (VIETNAM) CO., LTD.
Ho Nai Industrial Zone, Thanh Hoa
Hamlet, Ho Nai Ward, Dong Nai
Province, Vietnam.
Tel: (84-251) 3983171-3
Fax: (84-251) 3983175

YUN-LIN

KENDA RUBBER IND. CO., LTD.
NO.50 NO.60, YanPing Rd., Citong
Village, Citong Township, Yunlin County,
Taiwan(647008)
Tel: (886-5)5845271
Fax: (886-5)5849325

VIETNAM

KENDA RUBBER (VIETNAM) CO., LTD.
Route 8, Giang Dien Industrial Zone,
Trang Bom District, Dong Nai Province,
Vietnam
Tel: (84-251)6261001-4
Fax: (84-251)6261000

SHANGHAI (CHINA)

KENDA RUBBER (CHINA) CO., LTD.
NO.2, Kunjia Road, Kunshan
Development Zone, Jiangsu (215333)
Tel: (86-512)57614172-4
Fax: (86-512)57614171

INDONESIA

PT. KENDA RUBBER INDONESIA
42177 Jl. Raya Cikande Rangkasbitung
Km 5, Desa Kareo, Kec. Jawilan, Serang,
Banten, Indonesia
Tel: (62-0254)795-1355
Fax: (62-0254)795-1341

TIANJIN (CHINA)

KENDA RUBBER (TIANJIN) CO., LTD.
No. 6 No.8 Taian Road, Southern
District, Jinghai Economic
Development District, Tianjin City,
China (301609)
Tel: (86-022)59526666-7
Fax: (86-022)59529678

 /kendapowersports

 /kendapowersport

 /KendaTiresUSA

 **KENDA**

kendatire.com



MC01-2025-08-660