

BKT

GROWING TOGETHER

IMPLEMENT

AGRICULTURAL TIRES





AGRICULTURAL TIRES

IMPL

Even when it comes to agricultural trailers, tires play a fundamental role. We at BKT are fully aware of this. Tires for agricultural implement are subject to multiple mechanical stress. We hence know how important it is for farmers to have tires that maximize load capacity and increase productivity and yields even on the most difficult terrains. This is why we develop and design our products in such a way that we can offer high-quality tires providing extraordinary durability and great stability to our customers. Find out which BKT tire best suits your needs.



LEMENT



Radial

Radial tires have steel cords that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.



Bias

Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance and puncture resistance.








GROWING TOGETHER

AGRICULTURAL TIRES

IMPROVING

TECHNOLOGIES





ELEMENT

PERFORMANCE



Comfort



Cut and Chip Resistance



Durability



Excellent flotation



Field Protection



Fuel Economy



Handling and Comfort



Hard Rocky Surface



High Load Capacity



High Puncture Resistance



Ideal for grassland



Low Rolling Resistance



On/Off Road



Reduced Soil Compaction



Road Oriented



Self-Cleaning



Stability



Steering Control



Stubble Resistance



Traction

IMPLEMENT TIRES



AW 711



[p. 10]



AW 712



[p. 12]



AW 715



[p. 13]



AS 511



[p. 14]



RM 500



[p. 15]



AW 702



[p. 16]



AW 705



[p. 20]



AW 708



[p. 22]



AW 726



[p. 24]



AW 729



[p. 25]



TERRA TRAX



[p. 26]



AW 909



[p. 27]



AW 09



[p. 29]



AW-18



[p. 30]



BK 4040



[p. 31]



RIB IMPLEMENT (A)



[p. 32]



RIB IMPLEMENT (B)



[p. 33]



RIB 713



[p. 34]



RIB 774 (A)



[p. 35]



RIB 774 (B)



[p. 36]



RIB 774 (C)



[p. 37]



RIB 775



[p. 38]



RIB 900



[p. 39]



RIB MASTER



[p. 40]

IMPLEMENT TIRES



FLOTATION RIB IMPLEMENT



[p. 41]



MULTI RIB



[p. 42]



AS 504



[p. 43]



FARM 2000



[p. 52]



SR 234



[p. 55]



TR 393



[p. 56]



PL 846



[p. 60]



SR 713



[p. 61]



AS 505



[p. 49]



AS 507



[p. 50]



AS 509



[p. 51]



TR 393 (B)



[p. 57]



TR 882



[p. 58]



SL 441



[p. 59]



Radial



167



AW 711

AW 711 is a radial implement tire specially designed for modern farming, and suitable for haulage, hay harvesting and soil tillage applications. Thanks to its special tread compound, AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption. Thanks to the VF technology, AW 711 can carry heavy loads at low inflating pressure.

Technologies



Steel Belted

Performance



Durability



Fuel Economy



High Load Capacity



Stubble Resistance

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 16.5"	265/70 R 16.5	134 A8/B	8.25	-	264	773	343	2286	370	SR
	305/70 R 16.5	148 A8/B	9.75	-	325	851	371	2552	410	SR
	340/60 R 16.5	145 A8/B	11	-	324	820	368	2476	390	SR
	380/55 R 16.5	150 A8/B	12	11.75	360	830	372	2500	390	SR
	395/55 R 16.5	152 A8/B	12	-	394	838	365	2516	400	SR
	VF 410/50 R 16.5	153 B	AG 11.75	-	410	835	350	2513	400	SB
Ø 17"	VF 480/45 R 17	167 A8/B	16.00	-	491	866	363	2644	410	SB
Ø 18"	IF 340/65 R 18	153 A8/B	W 11	-	330	899	381	2703	450	SR
	400/60 R 18	159 A8/B	14	13	394	945	419	2807	450	SR
	440/55 R 18	159 A8/B	14	13	410	945	432	2893	450	SR
Ø 19.5"	15 R 19.5	139 D	11.75	12.75	389	1019	471	3094	475	SR
	380/70 R 19.5	159 A8/B	12.15	13.15	389	1019	444	3038	475	SR

SR: Stubble Resistant - SB: Steel Belted





Radial



AW 712

AW 712 is an implement radial tire that is particularly suitable for slurry tank trucks and trailers. It features a strong casing in addition to a stubble-resistant compound to ensure great durability. AW 712 provides also excellent driving comfort.

Performance



Comfort



Durability



Stubble Resistance

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 15.3"	260/70 R 15.3	134 A8/B	9.00	-	264	760	344	2304	370	IMP



IMP: Implement





AW 715

AW 715 is a high-performance radial tire for a wide range of agricultural implements designed for maximum operational efficiency and transport performance. The steel-belted construction enhances durability and stability, as well as resistance to punctures and stubble damage. The large contact patch combined with a rounded shoulder design protects grassland and reduces soil compaction, while the grooved tread design delivers superior traction on varied terrain. AW 715 features a robust carcass supporting heavy loads at speeds up to 65 km/h (40 mph), making it ideal for demanding agricultural operations and transport applications. This tire also stands out for smooth rolling, while the low aspect ratio further improves flotation.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 17"	500/50 R 17	149 D	16.00	-	503	940	433	2890	450	SB

SB: Steel Belted



Radial



149

Technologies



Steel Belted



Rounded Shoulder Technology

Performance



Durability



Stability



Stubble Resistance



High Puncture Resistance



Reduced Soil Compaction



High Load Capacity



Excellent flotation



Ideal for grassland



Radial



122



AS 511

AS 511 is best suited for grassland operations with implement machinery. The robust casing and the special cut-resistant tread compound ensure extraordinary stability plus enhanced performance. Thanks to its large contact area, AS 511 ensures excellent traction and minimizes soil compaction.

Performance



Cut and Chip Resistance



Reduced Soil Compaction



Stability



Traction

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 15"	31 X 15.50 R 15	122 B	13 LB	-	388	785	353	2387	380	STD
	33 X 15.50 R 15	126 B	13 LB	-	404	840	375	2533	400	STD



STD: Standard





RM 500

RM 500 is a steel-belted radial tire suitable for harvester implement applications. It features a strong casing and a special tread design providing high load capacity and particular cut-and-chip resistance. Thanks to its large footprint, RM 500 ensures great pressure distribution on the ground with reduced soil compaction in addition to excellent traction.

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 24"	500/70 R 24	167 A8/155 A8	W 16 L	W 15 L	502	1310	572	3907	625	SB
	500/85 R 24	182 A8/170 A8	W 16 L	W 15 L	520	1460	622	4382	700	SB
	500/85 R 24	182 A8/170 A8	W 16 L	W 15 L	520	1460	622	4382	700	SB
Ø 28"	500/80 R 28	176 A8/164 A8	W 16 L	W 15 L	503	1495	635	4355	700	SB
	600/65 R 28	168 A8/156 A8	W 18 L	W 20 L	590	1486	640	4340	700	SB
	600/65 R 28	177 A8/165 A8	W 18 L	W 20 L	590	1486	640	4340	700	SB
Ø 30"	500/85 R 30	176 A8/164 A8	W 16 L	W 15 L	535	1610	674	4745	775	SB

SB: Steel Belted



Radial



A8



182

Technologies



Steel Belted

Performance



High Load Capacity



Stability



Traction



High Puncture Resistance



Bias



AW 702

AW 702 has been developed for implement machinery, trailers and balers in soil tillage and haulage applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs: an "aramid belted" version is available for those who need strengthened puncture resistance, the "HD" version has a special cut-and-chip resistant compound, while the "special" version provides extraordinary stubble resistance.

Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance



Cut and Chip Resistance



Durability



High Load Capacity



High Puncture Resistance







Stubble Resistance

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 12"	7.00 - 12	4.25	-	185	665	295	1948	AB	6	TL	-	95 A8
	7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	-	95 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	STD	8	TL	-	116 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	AB	10	TL	-	121 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	SPL	10	TL	-	121 A8
	10.0/80 - 12	9.00	7.0	264	710	317	2144	STD	10	TL	-	121 A8
Ø 15.3"	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	8	TT	-	119 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	10	TL	-	123 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	10	TT	-	123 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	12	TL	-	126 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	12	TT	-	126 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	SPL	14	TL	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	14	TL	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	14	TT	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	HD	18	TL	-	135 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	18	TL	-	135 A8
	10.0/75 - 15.3	9.00	-	274	760	351	2213	STD	22	TL	-	137 A8

AB: Aramid Belted - STD: Standard - SPL: Special - HD: Heavy Duty



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 15.3"	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	-	131 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	-	131 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	-	135 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	-	135 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	-	139 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	-	141 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	-	141 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	-	143 A8
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	-	143 A8
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	-	142 A8
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	14	TT	-	142 A8	
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	-	142 A8	
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TL	-	144 A8	
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	-	144 A8	
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	18	TL	-	146 A8	

AB: Aramid Belted - STD: Standard - SPL: Special





Bias



A8



155



AW 702

AW 702 has been developed for implement machinery, trailers and balers in soil tillage and haulage applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs: an "aramid belted" version is available for those who need strengthened puncture resistance, the "HD" version has a special cut-and-chip resistant compound, while the "special" version provides extraordinary stubble resistance.

Technologies



Aramid Belted



Hard Compound



Heavy Duty

Performance



Cut and Chip Resistance



Durability



High Load Capacity



High Puncture Resistance





Stubble Resistance


	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 16"	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	334	2197	STD	6	TL	-	95 A8
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	334	2197	STD	6	TT	-	95 A8
	6.00 - 16	4.00 E	4.50 E ; 4½ K	169	722	334	2197	STD	8	TT	-	103 A8
	10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-	-
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	350	2329	SPL	10	TL	-	123 A8
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	350	2329	STD	10	TL	-	123 A8
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	350	2329	STD	10	TT	-	123 A8
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	343	2112	IND	14	TL	-	130 A8
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	350	2329	STD	14	TL	-	130 A8
	10.5/65 - 16	W 9	W 8 ; W 8 L	270	760	350	2329	STD	14	TT	-	130 A8
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	-	130 A8
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	-	133 A8
13.0/55 - 16	11.0	-	336	770	345	2256	STD	18	TL	-	138 A8	
13.0/75 - 16	11.0	-	9 ; W 9 ; W 11	340	890	396	2726	STD	10	TL	-	135 A8
Ø 18"	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	10	TL	-	131 A8
	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	14	TL	-	138 A8
	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	16	TL	-	140 A8

STD: Standard - SPL: Special - IND: Industrial



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 18"	12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	-	139 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	12	TL	-	142 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	-	145 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	-	145 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	-	148 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	-	148 A8
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	-	150 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	-	141 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	-	141 A8
	13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	-	144 A8
	14.5/80 - 18	11.0	12; 13	374	1047	446	3068	STD	12	TT	-	155 A8

STD: Standard - SPL: Special

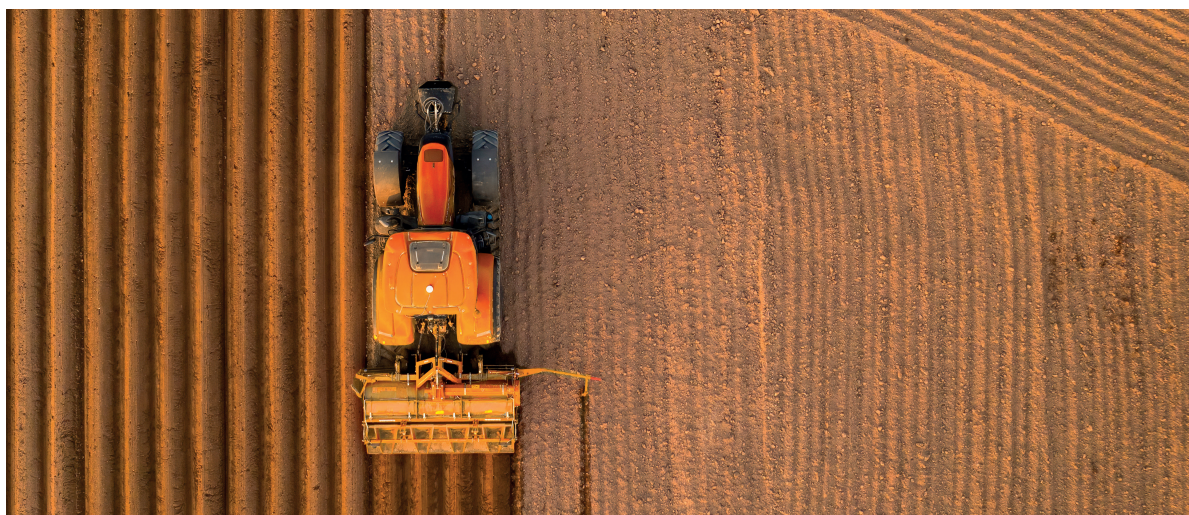



Bias



A8



156

AW 705



AW 705 has been developed for implement machinery, trailers and balers in soil tillage and haulage applications. It is ideal for modern farming thanks to improved durability and high load capacity.

Performance



Durability







High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 16"	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TT	-	142 A8
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TL	-	134 A8
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TT	-	134 A8
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TL	-	142 A8
Ø 17"	15.0/55 - 17	13.00	13; W13	381	850	391	2575	SPL	10	TL	-	134 A8
	15.0/55 - 17	13.00	13; W13	381	850	391	2575	STD	10	TL	-	134 A8
	15.0/55 - 17	13.00	13; W13	381	850	391	2575	STD	12	TL	-	138 A8
	15.0/55 - 17	13.00	13; W13	381	850	391	2575	STD	14	TL	-	141 A8
	15.0/55 - 17	13.00	13; W13	381	850	391	2575	STD	18	TL	-	146 A8
	15.0/55 - 17	13.00	13; W13	381	850	391	2575	STD	26	TL	-	155 A8
Ø 18"	15.0/70 - 18	13.00	13; W13	405	1010	447	3092	STD	12	TL	-	145 A8
	15.0/70 - 18	13.00	13; W13	405	1010	447	3092	STD	14	TL	-	148 A8
	15.0/70 - 18	13.00	13; W13	405	1010	447	3092	STD	16	TL	-	151 A8
Ø 20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TT	-	151 A8
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	414	1085	483	3342	STD	12	TL	-	151 A8
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TT	-	154 A8

STD: Standard - SPL: Special



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 20"	16.0/70 - 20	13.0	12 SDC ; 13 SDC ; 14	408	1075	480	3155	SPL	14	TL	-	154A8
	16.0/70 - 20	13.0	12 SDC ; 13 SDC ; 14	408	1075	480	3155	STD	14	TL	-	154A8
	16.0/70 - 20	13.0	12 SDC ; 13 SDC ; 14	408	1075	480	3155	STD	16	TL	-	156A8
Ø 22.5"	400/55 - 22.5	AG 11.75	12.25 ; AG 13.00	405	1016	443	3072	STD	18	TL	-	154A8
	400/55 - 22.5	AG 11.75	12.25 ; AG 13.00	405	1016	443	3072	SR	20	TL	-	156A8

STD: Standard - SR: Stubble Resistant - SPL: Special





Bias



A8



162

AW 708



AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and balers. An HD version is available with a special cut-and-chip resistant compound.

Technologies



Heavy Duty

Performance



Cut and Chip Resistance



Durability







High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15.5"	400/60 - 15.5	AG 13.00	-	405	875	380	2564	HD	18	TL	-	149 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TT	-	149 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TL	-	149 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	18	TL	-	149 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	-	136 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TT	-	145 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	-	145 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	SR	18	TL	-	149 A8
Ø 17"	19.0/45 - 17	16.00	-	470	866	380	2536	STD	10	TL	-	138 A8
	19.0/45 - 17	16.00	-	470	866	380	2536	STD	14	TL	-	144 A8
	19.0/45 - 17	16.00	-	470	866	380	2536	STD	18	TL	-	148 A8
	19.0/45 - 17	16.00	-	470	866	380	2536	SR	22	TL	-	152 A8
	19.0/45 - 17	16.00	-	491	866	380	2536	SPL	22	TL	-	152 A8
	500/50 - 17	16.00	-	500	945	416	2750	STD	14	TL	-	149 A8
	500/50 - 17	16.00	-	500	945	416	2750	STD	16	TL	-	152 A8
	500/50 - 17	16.00	-	500	945	416	2750	STD	18	TL	-	154 A8

STD: Standard - HD: Heavy Duty - SPL: Special - SR: Stubble Resistant



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 17"	500/50 - 17	16.00	-	500	945	416	2750	STD	10	TL	-	140 A8
	500/65 - 17	16.00	-	525	1080	462	3135	STD	18	TL	-	160 A8
	520/50 - 17	16.00	-	516	952	404	2777	STD	-	TL	-	162 A8

STD: Standard





Bias



A8



149

Technologies



Block Pattern

Performance



Durability



Self-Cleaning



AW 726

AW 726 has been specially designed for trailers in transport operations. It is best suited for both on-and-off-the-road usage. AW 726 shows excellent road performance and self-cleaning features. The block pattern design provides an extended tire life-cycle.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15.3"	11.5/80 - 15.3	9.00	-	300	855	363	2531	AB	14	TL	126 A8	139 A8
	11.5/80 - 15.3	9.00	-	300	855	363	2531	STD	14	TL	126 A8	139 A8
	11.5/80 - 15.3	9.00	-	300	855	373	2540	SB	14	TL	126 A8	139 A8
Ø 15.5"	400/60 - 15.5	AG 13.00	-	400	875	-	-	STD	18	TL	137 A8	149 A8
Ø 17"	420/55 - 17	13.00	-	415	890	392	2584	STD	-	TL	121 A8	133 A8



AB: Aramid Belted - STD: Standard - SB: Steel Belted





AW 729

AW 729 is an agricultural tire specifically designed for transport, hay harvesting, baling and soil tillage applications. Its rounded shoulder and three central grooves tread design provide low soil compaction and avoids damages to the field. AW 729 is the ideal tire for modern farming, and it is suited for both on-and-off-the-road usage.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 16"	340/55 - 16 (13.0/55 - 16)	11.0	-	343	785	358	2358	STD	-	TL	121 A8	133 A8
Ø 17"	15.0/55 - 17	13.00	13; W 13	385	850	377	2560	STD	10	TL	122 A8	134 A8
	380/55 - 17	13.00	13; W 13	385	850	377	2560	STD	-	TL	122 A8	134 A8
	480/45 - 17	16.00	-	480	866	400	2526	STD	-	TL	134 A8	146 A8
	500/50 - 17	16.00	-	500	945	426	2885	STD	-	TL	137 A8	149 A8

STD: Standard



Bias



A8



149

Performance



Reduced Soil Compaction



Self-Cleaning



Durability



On/Off Road



Bias



A8



156

Performance



Comfort



Fuel Economy



Road Oriented



Self-Cleaning



TERRA TRAX

TERRA TRAX has been specially designed for fodder and feeder implement. It is best suited for both on-and-off-the-road usage. TERRA TRAX shows excellent road performance, driving comfort and self-cleaning features. The low rolling resistance contributes to better fuel economy.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 17.5"	400/45 L - 17.5	14	-	395	785	361	2370	STD	14	TL	156A8

STD: Standard





AW 909

AW 909 has been developed for soil tillage, hay harvesting and transport applications with implement machinery, trailers and balers. It is ideal for modern farming both on and off the road.



Bias



A8



143

Performance



Handling and Comfort

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 12"	10.0/75 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	-	116 A8
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	-	116 A8
	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	-	121 A8
Ø 15.3"	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	-	123 A8
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	-	126 A8
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	-	130 A8
	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	-	135 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	16	TL	-	141 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	18	TL	-	143 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	10	TL	-	131 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	12	TL	-	135 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	14	TL	-	139 A8
	11.5/80 - 15.3	9.00	-	300	844	370	2473	STD	16	TT	-	141 A8
	12.5/80 - 15.3	9.00	-	312	889	387	2593	STD	14	TL	-	142 A8

STD: Standard





Bias



A8



143

Performance



Handling and Comfort



AW 909

AW 909 has been developed for soil tillage, hay harvesting and transport applications with implement machinery, trailers and balers. It is ideal for modern farming both on and off the road.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 17"	15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	-	134 A8
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	12	TL	-	138 A8
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	-	141 A8



STD: Standard





AW 09

AW 09 has been developed for soil tillage, hay harvesting and transport applications with implements, balers and trailers. It is ideal for modern farming both on and off the road. Its reinforced carcass ensures high load capacity and a longer service tire life. AW 09 has been designed with a special cut-and-chip-resistant compound that provides extraordinary stubble resistance.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 15.3"	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	110 A8	122 A8
	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	114 A8	126 A8
	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	119 A8	131 A8
	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	129 A8	141 A8
	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	120 A8	132 A8
	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	126 A8	138 A8
	320/80 - 15.3	9.00	-	309	901	392	2640	STD	-	TL	133 A8	145 A8
Ø 15.5"	400/60 - 15.5	AG 13.00	-	404	874	382	2561	STD	-	TL	132 A8	145 A8
Ø 17"	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	125 A8	138 A8
	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	128 A8	141 A8

STD: Standard



Bias



A8



145

Technologies



Special Compound

Performance



Cut and Chip Resistance



Durability



High Load Capacity



Stubble Resistance



Bias



AW-18

AW-18 has been designed for trailers and implement machinery employed in soil tillage operations. Its special design with non-directional lugs and a rounded shoulder area avoids crop damages while maneuvering. The tread pattern has been specifically developed to ensure top self-cleaning properties. AW-18 also stands for best driving comfort and reduced fuel consumption.

Technologies



Rounded Shoulder Technology

Performance



Field Protection



Fuel Economy



Handling and Comfort



Self-Cleaning

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15.3"	11.5/80 - 15.3 (300/80 - 15.3)	9.00	-	297	845	-	-	STD	-	TL	-	139A8



STD: Standard





BK 4040

BK 4040 has been specifically designed for agricultural trailers in haulage application. The strong casing ensures best load capacity and durability.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
											
Ø 16"	6.50 - 16	4.50 E	-	182	740	-	-	STD	10	TT	-
	7.00 - 16	5.50	5.00 F	198	770	-	-	STD	12	TT	-

STD: Standard



Bias

Performance



Durability



High Load Capacity



Bias



RIB IMPLEMENT (A)

RIB IMPLEMENT (A) has been engineered for trailers and implement machinery in transport and soil tillage applications. It is ideal for modern farming and shows top performance both on and off the road. RIB IMPLEMENT (A) is the right choice for all operating conditions which require a high level of handling as well as reduced soil compaction to preserve the crops.

Performance



Handling and Comfort



Reduced Soil Compaction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
		Ø 12"	10.0/80 - 12	9.00	7.0	264	746				329	2186



STD: Standard





RIB IMPLEMENT (B)

RIB IMPLEMENT (B) has been specially designed for agricultural implements. This ideal tire for modern farming is made of a stubble-resistant compound providing excellent puncture protection. RIB IMPLEMENT (B) is a 5-rib tread pattern tire featuring a strong casing for a longer service life. It is the right choice for all operating conditions, which require high load capacity along with low rolling resistance.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 17"	49 - 17	13.0	14.0	425	1200	-	-	STD	20	TT	146 A8/ 143 B	158 A8/ 154 B

STD: Standard



Bias



B



158

Performance



Durability



High Load Capacity



Stubble Resistance



Radial



RIB 713

RIB 713 is a steel-belted tire for agricultural implements. As a response to the increasing awareness of low soil compaction in modern farming, RIB 713 has been designed with IF technology. This enables the tire to carry heavier loads at lower inflation pressures and provides a larger footprint with uniform weight distribution. The steel-belted structure provides excellent puncture resistance and hence increased protection against stub penetration and relative damage, even if running into strong stubble. In addition, "D" speed rating (65 km/h - 40 mph) allows for fast road transfers. RIB 713 is BKT's contribution to maximize both the productivity and efficiency of your farming business.

Technologies



High Speed



IF Technology



Steel Belted

Performance



Durability



Fuel Economy



High Load Capacity



Stubble Resistance

	Tire size	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 15"	IF 240/80 R 15	129 D	W 8	-	240	765	354	2324	360	SR
	IF 265/85 R 15 (10.5 L R 15)	121 D	W 8	-	260	831	368	2502	390	SR
	IF 280/70 R 15	128 D	W 8	-	279	779	347	2356	360	SR
	IF 280/70 R 15	134 D	W 8	-	279	779	347	2356	360	SR
	IF 320/70 R 15	146 D	W 10	-	320	823	367	2590	390	SR

SR: Stubble Resistant





RIB 774 (A)

RIB 774 (A) is a low-section implement tire offering high load capacity and a long tire life-cycle. It is suitable for hay harvesting and transport applications with balers and trailers.



Bias



A8



150



Performance



Durability



High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 8"	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	225	460	217	1390	AB	6	TL	-	85 A8
	18 X 8.50 - 8	7.00 I - 55 ; I - 70 ; I - 90	-	225	460	217	1390	STD	6	TL	-	85 A8
Ø 14.5"	200/60 - 14.5	AG 6.75	-	210	610	288	1888	STD	10	TT	-	106 A8
	200/60 - 14.5	AG 6.75	-	210	610	288	1888	STD	10	TL	-	106 A8
	200/60 - 14.5	AG 6.75	-	210	610	288	1888	STD	14	TT	-	113 A8
	200/60 - 14.5	AG 6.75	-	210	610	288	1888	STD	14	TL	-	113 A8
	200/60 - 14.5	AG 6.75	-	210	610	288	1888	HD	10	TT	-	106 A8
	250/65 - 14.5	AG 8.00	6.75	255	690	303	1978	STD	12	TL	-	119 A8
	250/65 - 14.5	AG 8.00	6.75	255	690	303	1978	STD	14	TL	-	124 A8
Ø 16"	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	STD	14	TT	-	130 A8
	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	-	130 A8
	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	-	130 A8
Ø 18"	12.0 - 18	11.0	-	342	902	414	2688	STD	16	TL	-	150 A8

AB: Aramid Belted - STD: Standard - HD: Heavy Duty - IND: Industrial



Bias



RIB 774 (B)

RIB 774 (B) is a low-section implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications with implement machinery and trailers. It features great load capacity and a long tire life-cycle. An "HD" version is available for heavy-duty services.

Technologies



Special Compound

Performance



Durability



High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
		Ø 17"	15.0/55 - 17	13.00	13	391	850				377	2490
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	-	134 A8

STD: Standard





RIB 774 (C)

RIB 774 (C) is a low-section and narrow-width implement tire. It is ideal for hay harvesting and transport applications with balers and trailers, both on- and off-the-road. It features great load capacity and a long tire life-cycle.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 17"	19.0/45 - 17	16.00	-	455	845	387	2518	STD	10	TL	-	138 A8
Ø 17.5"	215/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	-	134 A8
	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	-	139 A8
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	-	134 A8
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	-	139 A8

STD: Standard



Bias



A8



139

Performance



Durability



High Load Capacity





Bias



RIB 775

RIB 775 is a low-section cross-ply tire for transport and soil tillage applications with trailers and implement machinery. It offers great load capacity and a long tire life-cycle.

Performance



Durability



High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
		Ø 12"	300/65 - 12	9.0	-	305	685				304	2007





STD: Standard





RIB 900

RIB 900 is suitable for transport, soil tillage and hay harvesting operations with trailers, implement machinery and balers. It offers great load capacity and a long tire life-cycle.

Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		
	Rec.	Alt.								DW	FR	
												
Ø 15.5"	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	-	139 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	-	145 A8
	400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	16	TL	-	147 A8

STD: Standard



Bias



Performance



Durability



High Load Capacity



Bias



RIB MASTER

RIB MASTER is suitable for transport and hay harvesting operations with trailers, balers and implement machinery. This tire offers great load capacity and a long tire life-cycle.

Performance



Durability



High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 17.5"	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	-	142 A8

STD: Standard





FLOTATION RIB IMPLEMENT

FLOTATION RIB IMPLEMENT is a rib pattern tire for trailers, implement and balers in transport and harvesting applications. It features high load capacity and a long tire life-cycle.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 15"	31 X 13.50 - 15	10 LB	-	360	780	374	2398	STD	12	TL	124 B

STD: Standard



Bias



B



124

Performance



Durability



High Load Capacity



Bias



MULTI RIB

MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors and implement machinery. It offers excellent handling throughout its long product life-cycle. Several versions are available for every need: an "aramid belted" version with improved puncture resistance, while the "HD" is made of a special cut-and-chip resistance compound.

Technologies



Aramid Belted



Heavy Duty

Performance



Cut and Chip Resistance



Durability



High Puncture Resistance



Steering Control

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 16"	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	AB HD	12	TL	-
	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	HD	12	TL	-
	11.00 - 16	W 10 L	W 8 ; W 8 L	315	930	-	-	STD	12	TL	-

AB HD: Aramid Belted Heavy Duty - HD: Heavy Duty - STD: Standard





AS 504

AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
Ø 12"	6.5/80 - 12	TT	4	72 A8	84 A8	STD	169	608	283	1836	5 J	5 JA
	6.5/80 - 12	TL	4	72 A8	84 A8	STD	169	608	283	1836	5 J	5 JA
	6.5/80 - 12	TT	6	80 A8	93 A8	STD	169	608	283	1836	5 J	5 JA
	6.5/80 - 12	TL	6	80 A8	93 A8	STD	169	608	283	1836	5 J	5 JA
	6.5/80 - 12	TT	6	80 A8	93 A8	HD	169	608	283	1836	5 J	5 JA
	7.00 - 12	TT	4	75 A8	88 A8	STD	187	683	311	2049	4.5	-
	7.00 - 12	TL	4	75 A8	88 A8	STD	187	683	311	2049	4.5	-
	7.00 - 12	TT	6	83 A8	95 A8	STD	187	683	300	2001	4.5	-
	7.00 - 12	TL	6	83 A8	95 A8	STD	187	683	311	2049	4.5	-
	7.00 - 12	TL	8	88 A8	100 A8	AB	187	683	311	2049	4.5	-
	7.00 - 12	TL	8	88 A8	100 A8	SPL	187	683	311	2049	4.5	-
	10.0/80 - 12	TL	-	109 A8	121 A8	STD	270	730	335	2233	9.00	7.0
	11.0/65 - 12	TT	8	101 A8	114 A8	STD	273	700	321	2072	9.00	-
	11.0/65 - 12	TL	8	101 A8	114 A8	STD	273	700	321	2072	9.00	-
	24 X 8.50 - 12	TL	6	81 A8	94 A8	STD	216	610	284	1761	7 JA ; 7.00 l	-

STD: Standard - HD: Heavy Duty - AB: Aramid Belted - SPL: Special



Bias



A8



168

Technologies



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance





Bias



168



AS 504

AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

Technologies



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance

	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
Ø 12"	26 X 12.00 - 12	TL	-	112 A6		STD	310	648	298	1932	10.50 AT	8.0 AT ; 8.5 AT ; 9.0 AT
Ø 15"	5.00 - 15	TT	4	67 A8	79 A8	STD	140	657	308	1957	3.50 D	3.00 D ; 4.00 E ; 4 J
	5.00 - 15	TT	6	75 A8	88 A8	STD	140	657	308	1957	3.50 D	3.00 D ; 4.00 E ; 4 J
	5.00 - 15	TL	6	75 A8	88 A8	STD	140	657	308	1957	3.50 D	3.00 D ; 4.00 E ; 4 J
	7.5 L - 15	TT	6	97 A8	109 A8	STD	210	765	354	2280	6 LB	5 K ; 5½ J ; 5½ K
	7.5 L - 15	TT	8	100 A8	113 A8	STD	210	765	354	2280	6 LB	5 K ; 5½ J ; 5½ K
	7.5 L - 15	TL	8	100 A8	113 A8	STD	210	765	354	2280	6 LB	5 K ; 5½ J ; 5½ K
	7.5 L - 15	TL	8	100 A8	113 A8	AB HD	210	765	354	2280	6 LB	5 K ; 5½ J ; 5½ K
	7.5 L - 15	TT	8	100 A8	113 A8	HD	210	765	354	2280	6 LB	5 K ; 5½ J ; 5½ K
400/50 - 15	TL	-	109 A8	121 A8	STD	395	790	369	2387	13 LB	-	
Ø 15.3"	10.0/75 - 15.3	TT	8	106 A8	119 A8	STD	264	785	360	2404	9.00	-
	10.0/75 - 15.3	TL	8	106 A8	119 A8	STD	264	785	360	2404	9.00	-
	10.0/75 - 15.3	TL	8	106 A8	119 A8	IND	264	785	360	2404	9.00	-
	10.0/75 - 15.3	TL	10	111 A8	123 A8	STD	264	785	360	2404	9.00	-
	10.0/75 - 15.3	TL	14	118 A8	130 A8	STD	264	785	360	2404	9.00	-

STD: Standard - HD: Heavy Duty - AB HD: Aramid Belted Heavy Duty - IND: Industrial



	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
Ø 15.3"	10.0/75 - 15.3	TT	18	123 A8	135 A8	STD	264	785	360	2404	9.00	-
	10.0/75 - 15.3	TL	18	123 A8	135 A8	STD	264	785	360	2404	9.00	-
	11.5/80 - 15.3	TT	8	114 A8	126 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TL	8	114 A8	126 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TL	10	119 A8	131 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TT	12	123 A8	135 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TL	12	123 A8	135 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TL	12	123 A8	135 A8	SR	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TT	14	126 A8	139 A8	STD	290	867	380	2540	9.00	-
	11.5/80 - 15.3	TL	14	126 A8	139 A8	STD	290	867	380	2540	9.00	-
	27 X 10 - 15.3	TL	8	95 A8	107 A8	STD	260	695	317	2071	9.00	-
	27 X 10 - 15.3	TT	8	95 A8	107 A8	STD	260	695	317	2071	9.00	-
Ø 16"	4.00 - 16	TT	4	66 A8	78 A8	STD	110	628	296	1935	3.00 D	2.50 C
	6.00 - 16	TT	6	83 A8	95 A8	STD	164	735	343	2190	4.00 E	4.50 E ; 4½ K
	6.00 - 16	TT	6	83 A8	95 A8	HD	164	735	343	2190	4.00 E	4.50 E ; 4½ K

STD: Standard - SR: Stubble Resistant - HD: Heavy Duty





Bias



A8



168



AS 504

AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

Technologies



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability






Cut and Chip Resistance

	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
Ø 16"	6.00 - 16	TT	8	91 A8	103 A8	HD	164	735	343	2190	4.00 E	4.50 E ; 4½ K
	7.50 - 16	TT	6	92 A8	104 A8	STD	209	803	372	2475	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F
	7.50 - 16	TL	8	99 A8	112 A8	STD	209	803	372	2475	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F
	7.50 - 16	TT	8	99 A8	112 A8	STD	209	803	372	2475	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F
	7.50 - 16	TT	8	99 A8	112 A8	HD	209	803	372	2475	5.50 F	4.50 E ; 5.00 F ; 4.00 E ; 5 K ; 6 LB ; 6.00 F
	9.0/70 - 16 (230/70 - 16)	TL	10	106 A8	119 A8	STD	222	760	355	2285	W 7	-
	270/75 - 16 (10.0/75 - 16)	TL	-	111 A8	123 A8	STD	250	810	-	-	9.00	-
Ø 17"	15.0/55 - 17	TL	10	122 A8	134 A8	STD	380	890	395	2608	13.00	13
	15.0/55 - 17	TL	14	128 A8	141 A8	STD	380	890	395	2608	13.00	13
	19.0/45 - 17	TL	14	131 A8	144 A8	STD	465	865	389	2578	16.00	-
	19.0/45 - 17	TL	16	134 A8	147 A8	STD	465	865	389	2578	16.00	-
	420/55 - 17	TL	14	129 A8	142 A8	STD	430	910	407	2712	13.00	-
	420/55 - 17	TL	16	133 A8	145 A8	STD	430	910	407	2712	13.00	-
Ø 18"	7.50 - 18	TT	6	94 A8	106 A8	STD	209	854	407	2649	5.50 F	4.50 E ; 6.00 F ; 5.00 F
	7.50 - 18	TT	8	101 A8	114 A8	STD	209	854	407	2649	5.50 F	4.50 E ; 6.00 F ; 5.00 F

STD: Standard - HD: Heavy Duty



	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
												
Ø 18"	7.50 - 18	TT	12	111 A8	122 A8	STD	209	854	407	2649	5.50 F	4.50 E ; 6.00 F ; 5.00 F
	10.5/80 - 18	TL	10	119 A8	131 A8	STD	274	907	430	2672	W 9	9 ; W 8
	12.5/80 - 18	TL	12	129 A8	142 A8	STD	308	987	438	2892	W 9	9 ; 11
	12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	987	438	2892	W 9	9 ; 11
	12.5/80 - 18	TL	16	135 A8	148 A8	STD	308	987	438	2892	W 9	9 ; 11
	12.5/80 - 18	TL	18	138 A8	150 A8	STD	308	987	438	2892	W 9	9 ; 11
Ø 20"	7.50 - 20	TT	8	103 A8	116 A8	STD	209	904	422	2695	5.50 F	4.50 E ; 6.00 F ; 5.00 F
	16.0/70 - 20	TL	10	135 A8	147 A8	STD	418	1097	487	3214	13	12 SDC ; 14 ; 13 SDC
	16.0/70 - 20	TL	12	139 A8	151 A8	STD	418	1097	487	3214	13	12 SDC ; 14 ; 13 SDC
	16.0/70 - 20	TL	14	142 A8	154 A8	STD	418	1097	487	3214	13	12 SDC ; 14 ; 13 SDC
	16.0/70 - 20	TL	16	144 A8	156 A8	STD	418	1097	487	3214	13	12 SDC ; 14 ; 13 SDC
	400/70 - 20	TL	-	149 A8		IND	408	1097	487	3214	13	12 SDC ; 14 ; 13 SDC
Ø 24"	15.5/80 - 24	TL	10	142 A8	154 A8	STD	384	1262	570	3875	W 12	W 13 ; W 14 L
	15.5/80 - 24	TL	12	145 A8	157 A8	STD	384	1262	570	3875	W 12	W 13 ; W 14 L
	15.5/80 - 24	TL	14	148 A8	160 A8	SPL	384	1262	570	3875	W 12	W 13 ; W 14 L

STD: Standard - SPL: Special - IND: Industrial





Bias



A8



168



AS 504

AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

Technologies



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance

	Tire size	Type	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
				DW	FR						Rec.	Alt.
Ø 24"	15.5/80 - 24	TL	14	148 A8	160 A8	STD	384	1262	570	3875	W 12	W 13 ; W 14 L
	15.5/80 - 24	TL	16	151 A8	163 A8	STD	384	1262	570	3875	W 12	W 13 ; W 14 L
	16.5/85 - 24	TL	10	146 A8	158 A8	STD	415	1325	584	4013	W 13	W 14 L ; W 15 L
	16.5/85 - 24	TL	12	151 A8	163 A8	STD	415	1325	584	4013	W 13	W 14 L ; W 15 L
	16.5/85 - 24	TT	16	155 A8	168 A8	STD	415	1325	584	4013	W 13	W 14 L ; W 15 L
	16.5/85 - 24	TL	16	155 A8	168 A8	STD	415	1325	584	4013	W 13	W 14 L ; W 15 L
	400/80 - 24	TL	-	156 A8		IND	394	1262	566	3655	W 13	W 12 ; W 14 L
	400/80 - 24	TL	-	162 A8		IND	394	1262	566	3655	W 13	W 12 ; W 14 L



STD: Standard - IND: Industrial





AS 505

AS 505 is best suited for soil tillage operations with trailers and implement machinery. It features excellent self-cleaning properties and increased traction on the ground, especially on muddy soil. The tire also ensures a long tire life-cycle.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 15"	6.5/80 - 15	5.0	4½ K; 5 K; 5 J	171	695	325	2106	STD	6	TL	86 A8	98 A8
	6.5/80 - 15	5.0	4½ K; 5 K; 5 J	171	695	325	2106	STD	8	TL	92 A8	104 A8

STD: Standard



Bias



A8



104

Performance



Durability



Self-Cleaning



Traction





Bias



AS 507

AS 507 is suitable for soil tillage with trailers and implement machinery. It features excellent self-cleaning properties and increased traction on the ground.

Performance



Durability



Self-Cleaning



Traction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15"	185/65 - 15	5½ J	-	185	640	301	1894	STD	4	TL	76 A8	89 A8


STD: Standard





AS 509

AS 509 has been specially designed for trailers, balers and implement machinery. It ensures high load capacity at low inflation pressure protecting crops. AS 509 provides great traction and self-cleaning properties.

Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS		
	Rec.	Alt.								DW	FR	
												
Ø 22.5"	550/45 - 22.5	AG 16.00	-	540	1065	479	3250	STD	12	TL	141 A8/ 137 B	153 A8/ 149 B
	550/45 - 22.5	AG 16.00	-	540	1065	479	3250	STD	20	TL	154 A8/ 150 B	166 A8/ 162 B

STD: Standard



Bias



Performance



Durability



High Load Capacity



Self-Cleaning



Traction



Bias



Technologies



Reinforced Carcass



Special Compound

Performance



Durability



Traction



Cut and Chip Resistance



Self-Cleaning



High Load Capacity









FARM 2000

The FARM 2000 tire is suitable on tractors for soil tillage applications. It has been designed with a special cut-and-chip resistant compound to ensure better durability. Thanks to its strong casing, FARM 2000 offers high load capacity. It also provides great traction and self-cleaning properties.

Ø	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
15.3"	260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	114A8	126A8
	300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	120A8	132A8
16"	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TT	113A8	125A8
	250/80 - 16	W 8	W 7 ; W 9 ; W 8 L	240	820	369	2429	STD	-	TL	113A8	125A8
18"	8 - 18	W 6	-	195	840	390	2458	STD	4	TT	85A6	
	8 - 18	W 6	-	195	840	393	2539	STD	6	TT	94A6	
	9.5 - 18	W 8	W 7	241	900	419	2751	STD	8	TT	105A6	
	250/80 - 18	W 8	W 7 ; W 9	240	870	394	2679	STD	-	TT	115A8	127A8
	250/80 - 18	W 8	W 7 ; W 9	240	870	394	2679	STD	-	TL	115A8	127A8
20"	8.3 - 20	W 7	-	210	895	431	2714	STD	4	TT	-	
	8.3 - 20	W 7	-	210	895	431	2714	STD	6	TT	-	
	9.5 - 20	W 8	W 7	241	945	445	2911	STD	8	TT	107A6	
22"	9.5 - 22	W 8	W 7	243	1007	470	3074	STD	8	TT	110A6	

STD: Standard



	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
											
Ø 24"	8.3 - 24	W 7	W 6	211	995	473	3032	STD	6	TT	-
	8.3 - 24	W 7	W 6	211	995	473	3032	STD	8	TT	105A6
Ø 28"	12.4 - 28	W 11	W 9; W 10	320	1288	603	3969	STD	8	TT	123A6
	12.4 - 28	W 11	W 9; W 10	320	1288	603	3969	STD	10	TT	124A6
	12.4 - 28	W 11	W 9; W 10	320	1288	603	3969	STD	12	TT	125A6
	12.4 - 28	W 11	W 9; W 10	320	1288	603	3969	SPL	12	TT	125A6
	13.6 - 28	W 12	W 11	345	1335	622	4080	STD	8	TT	125A6
	13.6 - 28	W 12	W 11	345	1335	622	4080	STD	10	TT	127A6
	13.6 - 28	W 12	W 11	345	1335	622	4080	STD	12	TT	128A6
	13.6 - 28	W 12	W 11	345	1335	622	4080	SPL	12	TT	128A6
	14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	8	TT	130A6
	14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	10	TT	132A6
	14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	12	TT	134A6
	14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	SPL	12	TT	134A6

STD: Standard - SPL: Special





Bias



FARM 2000

The FARM 2000 tire is suitable on tractors for soil tillage applications. It has been designed with a special cut-and-chip resistant compound to ensure better durability. Thanks to its strong casing, FARM 2000 offers high load capacity. It also provides great traction and self-cleaning properties.

Technologies



Reinforced Carcass



Special Compound

Performance



Durability



Traction



Cut and Chip Resistance



Self-Cleaning



High Load Capacity

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 28"	14.9 - 28	W 13	W 11 ; W 12	385	1375	636	4194	STD	14	TT	136A6
	16.9 - 28	W 15 L	W 14 L	429	1420	657	4351	STD	12	TT	143A6
	16.9 - 28	W 15 L	W 14 L	429	1420	657	4351	HD	8	TT	135A6
Ø 30"	18.4 - 30	W 16 L	-	470	1560	716	4776	STD	14	TT	151A6

STD: Standard - HD: Heavy Duty





SR 234

SR 234 is a versatile All-Steel radial tire for agricultural implements that can be fitted on harvesters and balers, tillage toolbars, seeders, large feed mixers, and anhydrous ammonia trailers. Designed with VF (Very High Flexion) technology, SR 234 can carry up to 40% more load than a standard tire of the same size at the same inflation pressure. Thanks to its wide footprint and ability to operate at lower pressure, this VF tire ensures reduced soil compaction preserving soil fertility and porosity in addition to enhanced traction. The strong steel-belted casing and a multi-rib tread pattern along with a specially engineered compound provide uniform tread wear and great durability. The low rolling resistance enhances fuel efficiency on the road and a smooth ride. The low rolling resistance enhances fuel efficiency on the road and a smooth ride. The hexagonal bead has been designed for easy mounting and a secure rim fitment. SR 234 is the ideal tire for operators looking for great performance both in the fields and on the road.

	Tire size	LI/SS	RIM		O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
Ø 22.5"	VF 445/50 R 22.5	167 D	14.00	-	438	1018	452	3050	-	STD

STD: Standard



Radial



Technologies



All Steel



VF Technology



Steel Belted



Larger Footprint



Special Compound

Performance



Reduced Soil Compaction



Comfort



Field Protection



Traction



Durability



Low Rolling Resistance



Fuel Economy



Bias



TR 393



TR 393 has been specially designed for hay balers, spreaders and implement machinery on and off the road. The special tread design provides best flotation and self-cleaning properties in addition to a long service life. Thanks to its large contact area, TR 393 ensures excellent traction and minimizes soil compaction.

Technologies



Reinforced Carcass



Special Compound

Performance



Excellent flotation



Reduced Soil Compaction



Self-Cleaning



Traction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 16.1"	16.5 L - 16.1 SL	W 14 C	W 14 CH	420	1025	461	2966	STD	6	TL	128 B
	21.5 L - 16.1 SL	W 18 CH	W 16 CH	546	1154	-	-	STD	10	TL	146 B

STD: Standard





TR 393 (B)

TR 393 (B) has been specially designed for seeders, spreaders and implement machinery on and off the road. The special tread design provides best flotation and self-cleaning properties in addition to a long service life. Thanks to its large contact area, TR 393 ensures excellent traction and minimizes soil compaction.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 15"	31 X 13.50 - 15	10 LB	-	350	777	-	-	SR	12	TL	124 B

SR: Stubble Resistance



Bias



R-3



B



124

Performance



Excellent flotation



Reduced Soil Compaction



Self-Cleaning



Traction



Bias



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. It has been designed to fit implement machinery, hay harvesters/balers and sugar cane machinery. Engineered with a special compound to reduce damage, this tire features also great durability and traction in every field condition. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.

Technologies



Heavy Duty



Special Compound



Aramid Belted

Performance



Cut and Chip Resistance



Durability



Stubble Resistance



Traction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15.5"	400/60 - 15.5	AG 13.00	-	400	875	378	2605	AB	14	TL	132 A8	145 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	AB HD	18	TL	137 A8	149 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	HD	14	TL	132 A8	145 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	HD	18	TL	137 A8	149 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	SPL	14	TL	132 A8	145 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	SPL	18	TL	137 A8	149 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	STD	8	TL	122 A8	134 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	STD	14	TL	132 A8	145 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	STD	18	TL	137 A8	149 A8
	400/60 - 15.5	AG 13.00	-	400	875	378	2605	STD	18	TL	137 A8	149 A8



AB: Aramid Belted - AB HD: Aramid Belted Heavy Duty - HD: Heavy Duty - SPL: Special - STD: Standard





SL 441

SL 441 is a tire developed for soil tillage and haulage operations with trailers and implement machinery. SL 441 has been engineered to offer great load capacity and a long tire life-cycle.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
												
Ø 14.5"	200/60 - 14.5	AG 6.75	-	210	610	278	1785	STD	10	TT	-	106A8
	200/60 - 14.5	AG 6.75	-	210	610	278	1785	STD	14	TL	-	113A8
	200/60 - 14.5	AG 6.75	-	210	610	278	1785	STD	14	TT	-	113A8

STD: Standard



Bias



A8



113

Performance



Durability



High Load Capacity





Bias



PL 846

PL 846 has been specially designed for implement machinery in soil tillage applications. It features excellent stability and outstanding traction as well as high cut and chip resistance. PL 846 is the ideal tire on rocky surfaces.

Performance



Cut and Chip Resistance



Durability



Hard Rocky Surface



Traction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
Ø 9"	6.00 - 9	4.00 E	-	160	540	-	-	STD	10	TT	-
	6.00 - 9	4.00 E	-	160	540	-	-	STD	12	TT	-
Ø 10"	7.50 - 10	5.50 F	-	209	634	-	-	STD	12	TL	-



STD: Standard





SR 713

SR 713 is an All Steel radial tire with VF technology for farming implements. The tire features a strong multi-ply steel-belted casing and a multi-rib tread pattern ensuring low rolling resistance and a uniform tread wear. Thanks to its large footprint, this VF tire provides reduced soil compaction. SR 713 excels in both performance and reliability offering excellent speed levels even on the road.

	Tire size	LI/SS	RIM		O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version
			Rec.	Alt.						
										
Ø 19.5"	VF 245/70 R 19.5	142 D	7.50	-	245	844	373	2559	-	STD
	VF 265/70 R 19.5	146 D	7.50	8.25	255	873	391	2612	-	STD
Ø 22.5"	VF 255/70 R 22.5	149 D	8.25	7.50	255	933	406	2790	-	STD
	VF 295/75 R 22.5	155 D	9.00	8.25	280	1020	449	3044	-	STD
	VF 295/75 R 22.5	151 D	9.00	8.25	280	1020	449	3044	-	STD
	VF 385/65 R 22.5	163 D	11.75	12.25	385	1080	487	3251	-	STD
	VF 445/65 R 22.5	176 D	13.00	14.00	440	1160	533	3515	-	STD
	VF 445/65 R 22.5	169 D	13.00	14.00	440	1160	533	3515	-	STD

STD: Standard



Radial



Technologies



All Steel



VF Technology

Performance



Field Protection



Load index

The load index is a code that defines a tire's maximum weight capacity at the speed given by its speed index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Corresponding values of load index (LI) and load capacity per wheel (kg / lbs)

LI	lbs	kg	LI	lbs	kg	LI	lbs	kg	LI	lbs	kg
50	420	190	85	1135	515	120	3085	1400	155	8540	3875
51	430	195	86	1170	530	121	3195	1450	156	8820	4000
52	440	200	87	1200	545	122	3305	1500	157	9095	4125
53	455	206	88	1235	560	123	3415	1550	158	9370	4250
54	465	212	89	1280	580	124	3525	1600	159	9645	4375
55	480	218	90	1325	600	125	3635	1650	160	9920	4500
56	495	224	91	1355	615	126	3750	1700	161	10195	4625
57	505	230	92	1390	630	127	3860	1750	162	10470	4750
58	520	236	93	1435	650	128	3970	1800	163	10745	4875
59	535	243	94	1475	670	129	4080	1850	164	11025	5000
60	550	250	95	1520	690	130	4190	1900	165	11355	5150
61	565	257	96	1565	710	131	4300	1950	166	11685	5300
62	585	265	97	1610	730	132	4410	2000	167	12015	5450
63	600	272	98	1655	750	133	4540	2060	168	12345	5600
64	615	280	99	1710	775	134	4675	2120	169	12785	5800
65	640	290	100	1765	800	135	4805	2180	170	13225	6000
66	660	300	101	1820	825	136	4940	2240	171	13560	6150
67	675	307	102	1875	850	137	5070	2300	172	13890	6300
68	695	315	103	1930	875	138	5205	2360	173	14330	6500
69	715	325	104	1985	900	139	5355	2430	174	14770	6700
70	740	335	105	2040	925	140	5510	2500	175	15210	6900
71	760	345	106	2095	950	141	5675	2575	176	15650	7100
72	785	355	107	2150	975	142	5840	2650	177	16095	7300
73	805	365	108	2205	1000	143	6005	2725	178	16535	7500
74	825	375	109	2270	1030	144	6175	2800	179	17085	7750
75	855	387	110	2335	1060	145	6395	2900	180	17635	8000
76	880	400	111	2405	1090	146	6615	3000	181	18185	8250
77	910	412	112	2470	1120	147	6780	3075	182	18740	8500
78	935	425	113	2535	1150	148	6945	3150	183	19290	8750
79	965	437	114	2600	1180	149	7165	3250	184	19840	9000
80	990	450	115	2680	1215	150	7385	3350	185	20390	9250
81	1020	462	116	2755	1250	151	7605	3450	186	20945	9500
82	1045	475	117	2835	1285	152	7825	3550	187	21495	9750
83	1075	487	118	2910	1320	153	8045	3650	188	22045	10000
84	1100	500	119	3000	1360	154	8265	3750	189	22705	10300

LI	lbs	kg	LI	lbs	kg	LI	lbs	kg
190	23370	10600	200	30865	14000	210	41885	19000
191	24030	10900	201	31965	14500	211	42990	19500
192	24690	11200	202	33070	15000	212	44090	20000
193	25350	11500	203	34170	15500	213	45415	20600
194	26015	11800	204	35270	16000	214	46735	21200
195	26785	12150	205	36375	16500	215	48060	21800
196	27555	12500	206	37475	17000	216	49380	22400
197	28330	12850	207	38580	17500	217	50705	23000
198	29100	13200	208	39680	18000	218	52025	23600
199	29980	13600	209	40785	18500	219	53570	24300

Speed index

The speed index is a value that indicates the maximum admitted speed at which the tire can carry the weight corresponding to its load index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Speed index	A2	A4	A6	A8	B	C	D	E	F	G	J	K
km/h	10	20	30	40	50	60	65	70	80	90	100	110
mph	5	10	20	25	30	35	40	45	50	55	62	68



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West Ave. Suite 240
Copley, Ohio 44321
Office: (+1) 330 836 1090
Fax: (+1) 330 836 1091

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 514 792 9220
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711



bkt-tires.com